

# Adding a Desktop Server Connection

## Overview

When using the TapeTrack Desktop Software you will have to have one or more TapeTrack Framework Server entries defined so that you can connect to a server endpoint.

This can also be achieved in the following ways:

1. [Adding a connection to the Configuration File.](#)
2. [Clicking on a URL.](#)
3. [Clicking a Windows Registry File.](#)



When using TapeTrack TapeMaster that was installed as part of the TapeTrack Framework Server installation, an entry for localhost will be automatically added by the installer.

## Prerequisites

To configure a server you will need the following information:


1. The server IP address or DSN name.
2. The server port (usually 5000).
3. If you are connecting via a HTTP Proxy:
  - The proxy IP address or DNS Name.
  - The proxy port
  - The proxy user name (if authentication is required)
  - The proxy password (if authentication is required)

## Adding a connection interactively


When you run one of the TapeTrack Desktop Programs, you will be prompted to enter a credentials to login.

If you do not have any TapeTrack Framework Servers defined, you will be asked if you want to add one.

If you wish to add an additional server, or delete an existing server, you should click the edit button, which is located next to the Server Selection Dropdown Window.

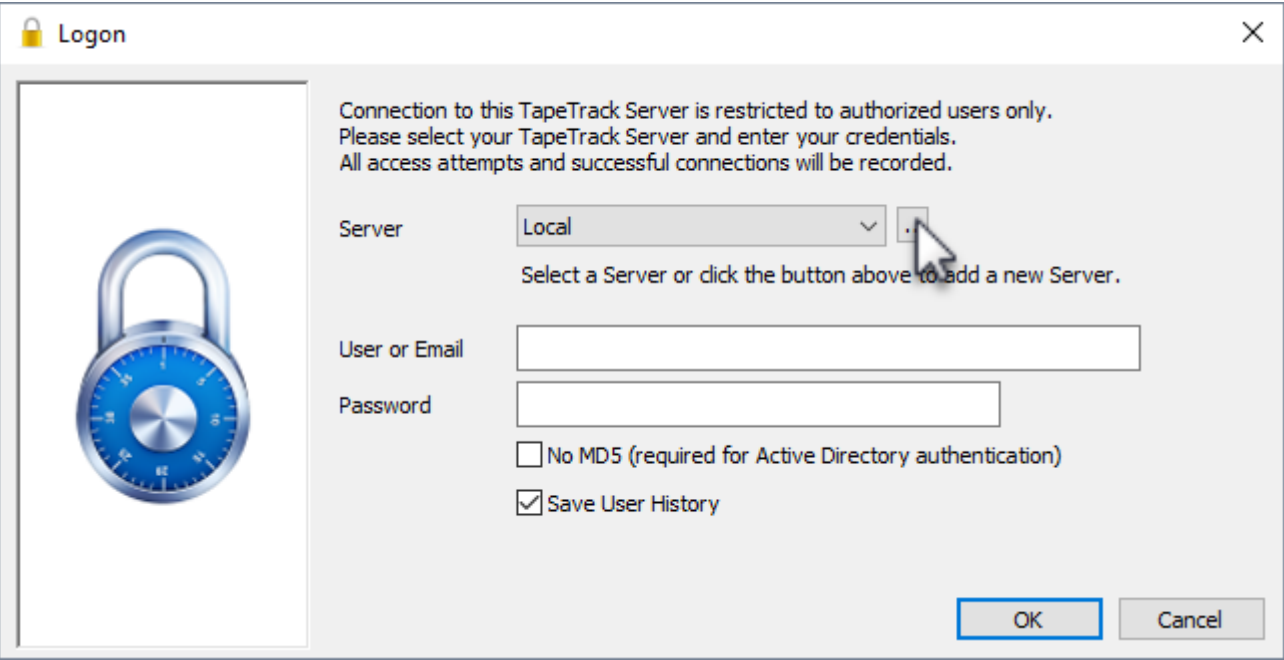

You will then be presented with the Defined Server List. From this list, right hand click, and select Add from the Context Menu.

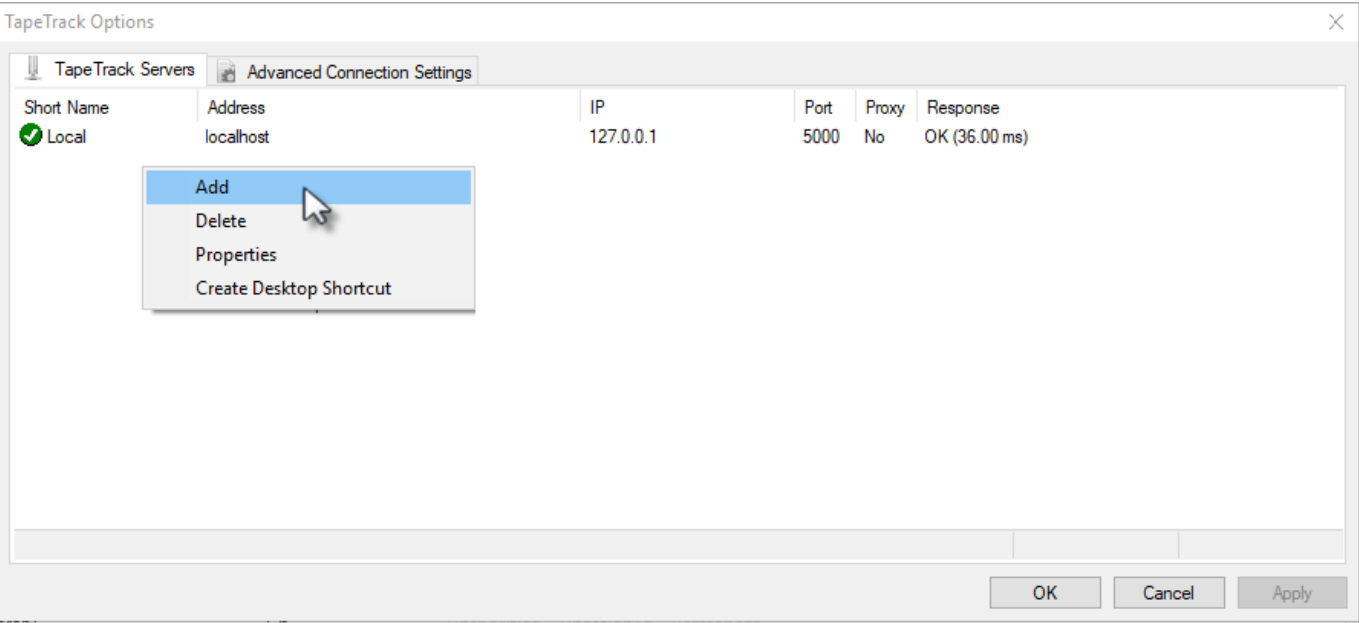

Setting Server Options

You will then be shown the Edit Server Information Dialog where you should enter:

| Property       | Description                                                                                                                                                                          |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Server Name    | this is the friendly name that you will be shown when selecting the server. It can be any value you personally wish it to be (i.e. MyServer)                                         |
| Server Address | this is the dotted IP address or DNS server name of your TapeTrack Server. This must be the value provided to you by your TapeTrack Administrator. It can not be an arbitrary value. |
| Server Port    | this is the TCP/IP port of your TapeTrack Server. It will usually be 5000 or 443, but could be any other value assigned by your TapeTrack Administrator.                             |

| Property           | Description |
|--------------------|-------------|
| Use HTTP Proxy     |             |
| Use Single Sign-On |             |

Server Information



|                    |                         |
|--------------------|-------------------------|
| Server Name        | My Server               |
| Server Address     | tapetrack.mycompany.com |
| Server Port        | 5000                    |
| Use HTTP Proxy     | False                   |
| Use Single Sign-On | False                   |

Server Address

TapeTrack Server name or IP address  
Example 'tapetrack.mydomain.com' or '192.168.1.10'

OK

Cancel

Setting Proxy Details

TapeTrack Options

TapeTrack Servers

Advanced Connection Settings

HTTP Proxy Settings

Address

proxy.gazillabyte.local

Port

3128

User ID

gnicol

Password

••••••••

Automatically Detect HTTP Proxy

OK

Cancel

Apply

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

[https://docs.tapetrack.com/desktop/adding\\_connection?rev=1504548985](https://docs.tapetrack.com/desktop/adding_connection?rev=1504548985)

Last update: **2025/01/21 22:07**

