

Adjusting Slot Allocation

From time to time you may need to adjust a [Customers Slot](#) allocation based on increased or decreased [Volume](#) numbers.

Increasing Slot Allocation

Slotting allocation can be increased by either adding extra [zones](#) to the [Repository](#), or by increasing the [Slot](#) allocation within the currently assigned [Zones](#).

See [Maintaining A Zone](#) to add or increase Zone allocation.

Decreasing Slot Allocation

Removing Empty Slots

Decreasing [Slot](#) allocation for a [Customer](#) can be as simple as reducing the [Slots](#) allocated through the [Slot Edit Range Information](#) window, as long as the [Slots](#) being removed are sequential, unoccupied and from the end of the last Zone allocated.

Removing Slot allocation using this method must be from the last allocated Zone (if multiple Zones are assigned) from the high end of the Zone. The reason for this is if there are three Zones allocated, each with 100 Slots, TapeTrack interprets these as one continual Slot arrangement, 1 to 100 in Zone 1, 101 to 200 in Zone 2 and 201 to 300 in Zone 3. Reducing the Slot allocation from 300 to 250 by removing the last 50 Slots from Zone 3 keeps all lower Slotted tapes in the same number Slot. So a tape in Slot 248 would still in the same place (Zone 3, 48th slot). If you were to remove the 50 Slots in Zone 2, Zone 1 would still be Slots 1 to 100, Zone 2 would now be Slots 101 to 150 and Zone 3 would be 151 to 250, essentially putting Slot 248 now in the 98th Slot in Zone 3. This would put all Volumes in Zone 3 out 50 Slots in allocation vs physical location.

Removing Occupied Slots


If the [Slots](#) to be removed from allocation are currently occupied, completely or partially, the [Volumes](#) will need to be reslotted before this can be accomplished.




You must have enough empty [Slots](#) under the highwater mark to accommodate any [Volumes](#) currently slotted above the mark.

To remove these [Volumes](#) from the occupied [Slots](#):

- Right click the required [Repository](#) and select Properties, or double click the [Repository](#) , and click on the Options tab.

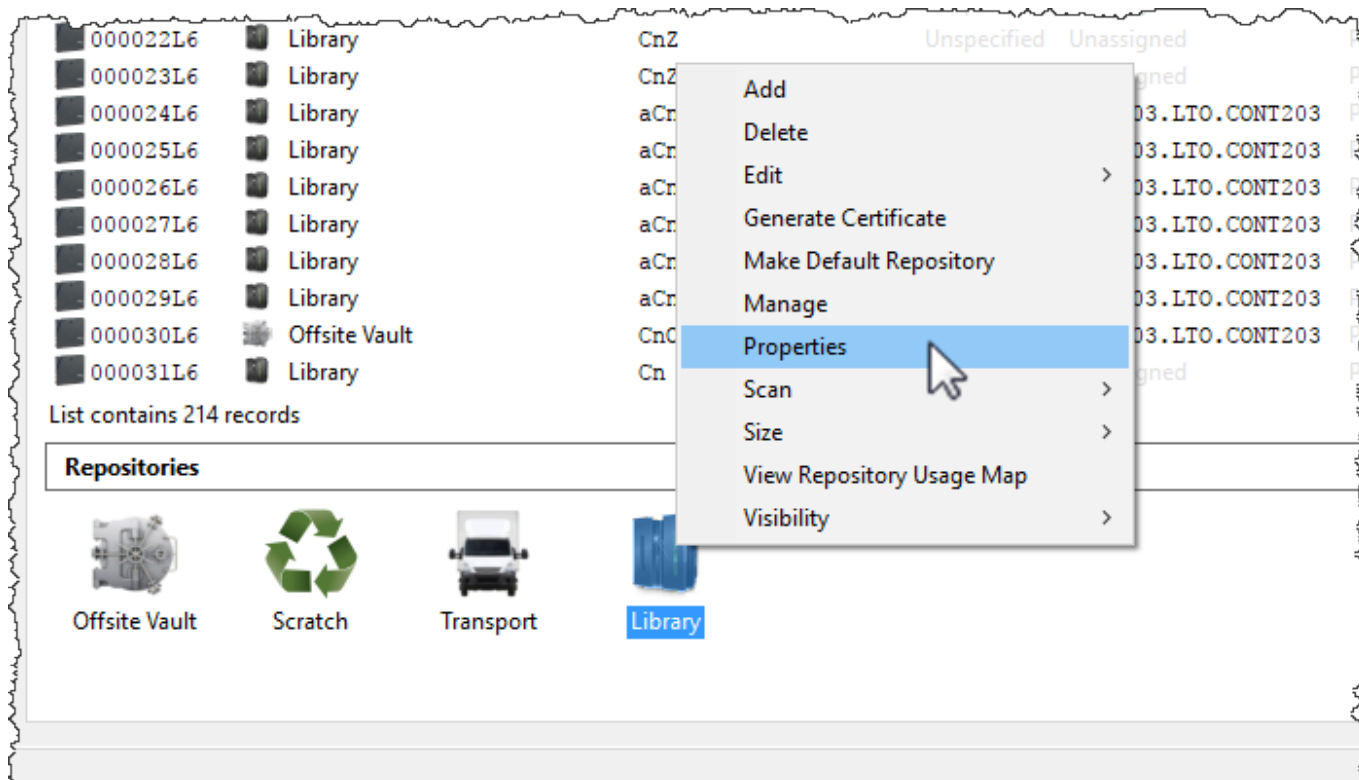

- Set Highwater Offset to the number you wish to lower [Slot](#) allocation by. For example if you currently have 3000 [Slots](#) allocated and wish to reduce the allocation to 1000 [Slots](#) set the highwater offset to 2000 (3000 - 2000).

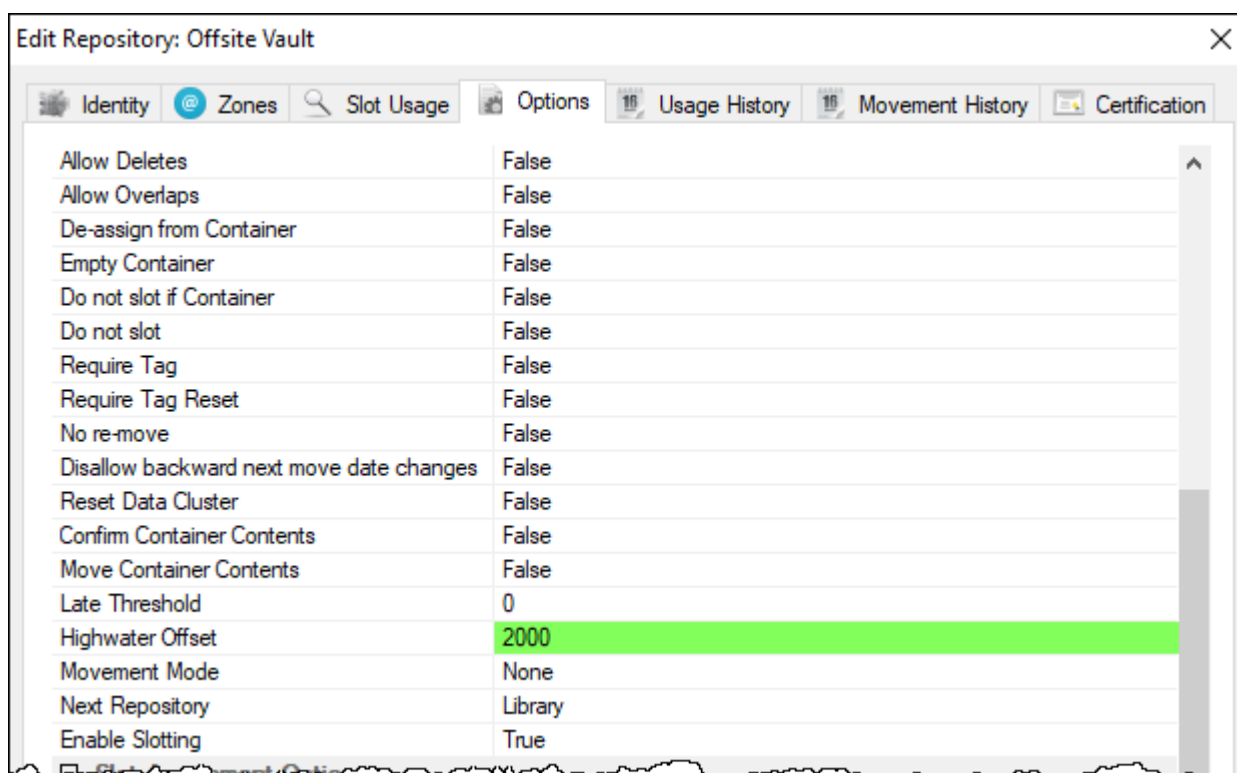

- Run the slotting program [TMSS10SlotAllocation](#) to re-slot any [Volumes](#) above the highwater mark.
- Decrease the [slot allocation](#).

Edit Range Information

Zone Selection

Zone-ID

2:2

Drawer 2 divider 2

Slot Start

1

Level 01, Slot S01

Slot End

2000

Level 100, Slot S20

Slot Total

2000

Slots/Level

20

Slot Ranges

Start Slot

1

Level/Slot

1

1

End Slot

1000

Level/Slot

50

20

Total Slots

1000

OK

Cancel

C-ID	M-ID	R-ID	Start	Slot	End
US03	LTO	OFFS	Level 01, Slot S01	1	Level 100, Slot S20

- Adjust the **Highwater Offset** back to zero to enable use of all allocated Slots.

Edit Repository: Offsite Vault

Identity

Zones

Slot Usage

Options

Usage History

Movement History

Certification

Allow Deletes

False

Allow Overlaps

False

De-assign from Container

False

Empty Container

False

Do not slot if Container

False

Do not slot

False

Require Tag

False

Require Tag Reset

False

No re-move

False

Disallow backward next move date changes

False

Reset Data Cluster

False

Confirm Container Contents

False

Move Container Contents

False

Late Threshold

0

Highwater Offset

0

Movement Mode

None

Next Repository

Library

Enable Slotting

True

From:
<https://docs.tapetrack.com/> - TapeTrack Documentation

Permanent link:
https://docs.tapetrack.com/master/adjusting_slot_allocation?rev=1638836854

Last update: 2025/01/21 22:07

