RFD8500 Setup

The Zebra RFD8500 is a Bluetooth wireless barcode and RFID scanner capable of scanning most formats of optical and RFID barcode used to identify tape.



The RFD8500 can be connected:


1. Paired directly with a PC via a Bluetooth connection

Components

The recommended setup for a RFD8500 is:


1. RFD8500 Scanner: Part Number `RFD8500-5000100-US`
2. 1 Slot Charging Cradle: Part Number `CRD1S-RFD8500-1R`
3. Power Supply for Cradle: Part Number `PWRS-14000-14R`

Scanner Features

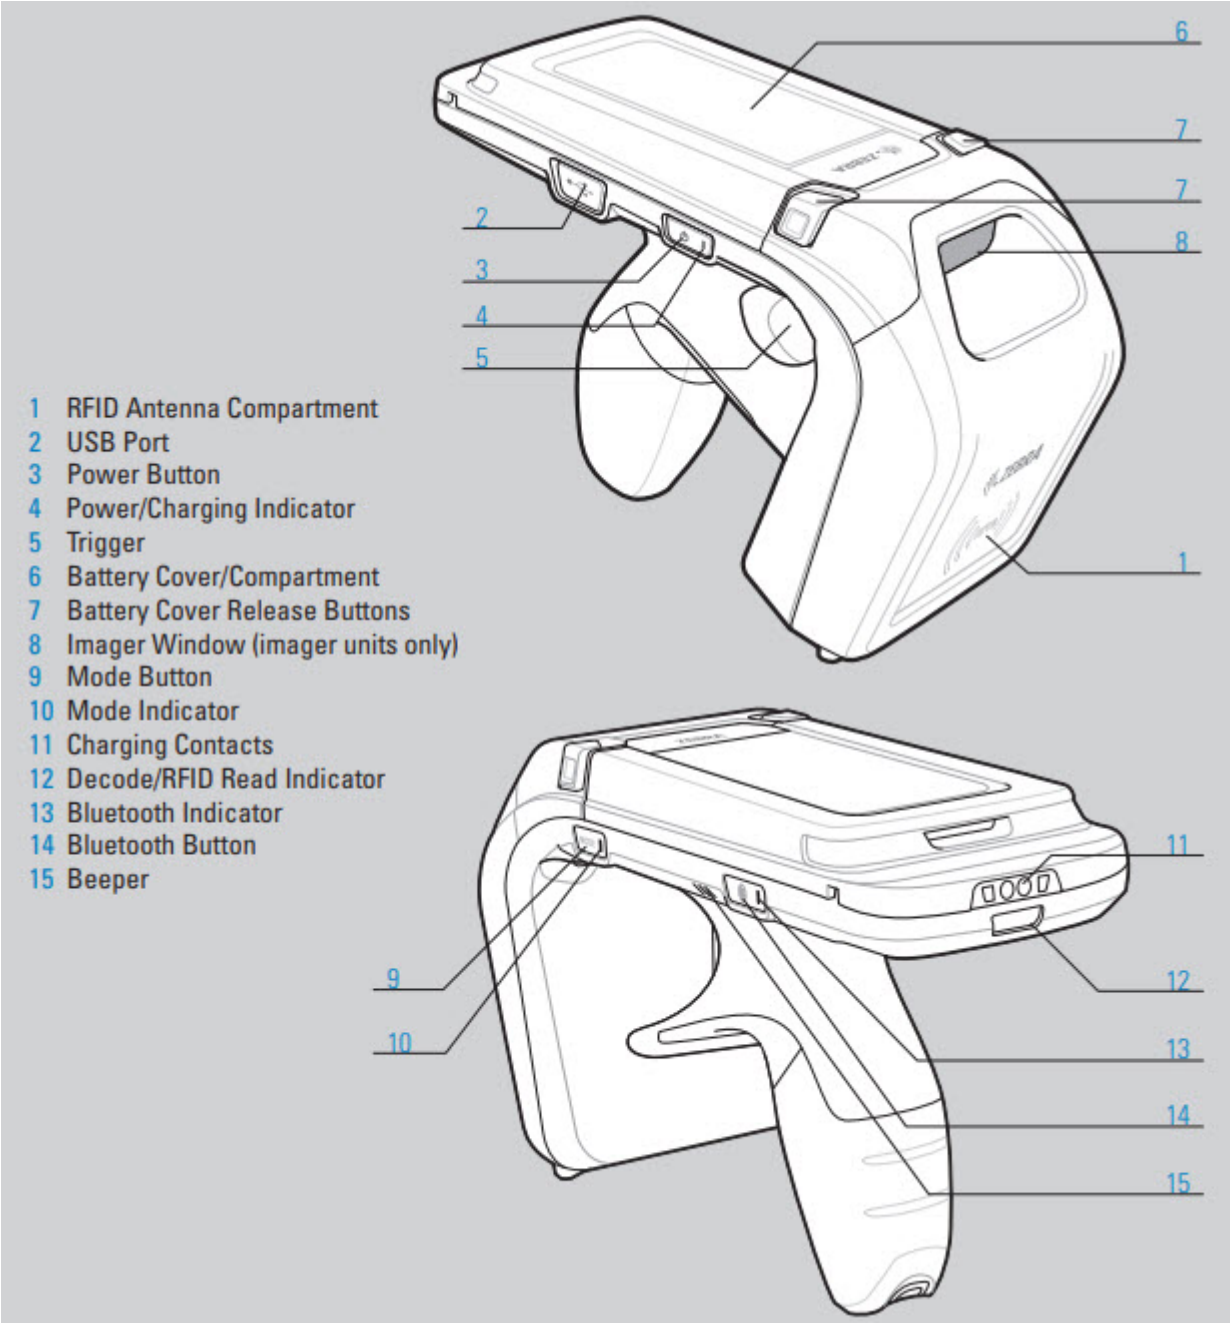


Pairing the Scanner

Select Bluetooth from the Window Task Bar

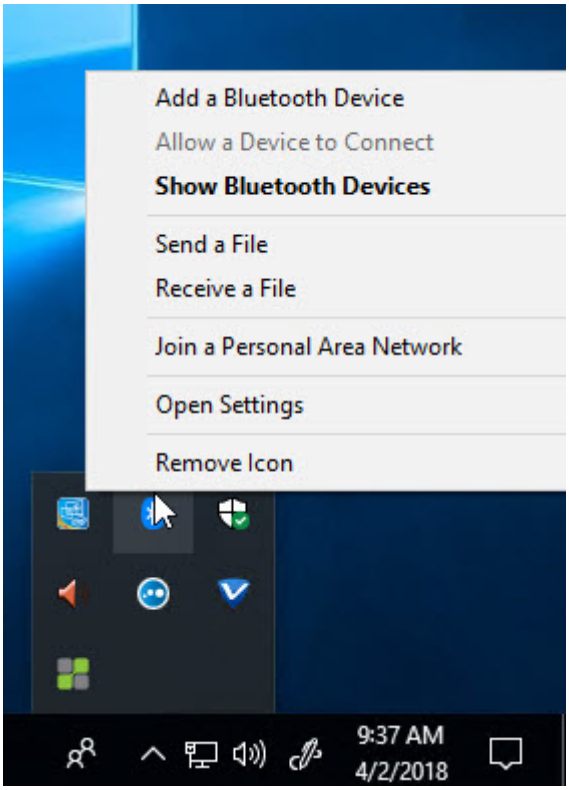

Add Bluetooth device


Click the `Bluetooth or other device` button.

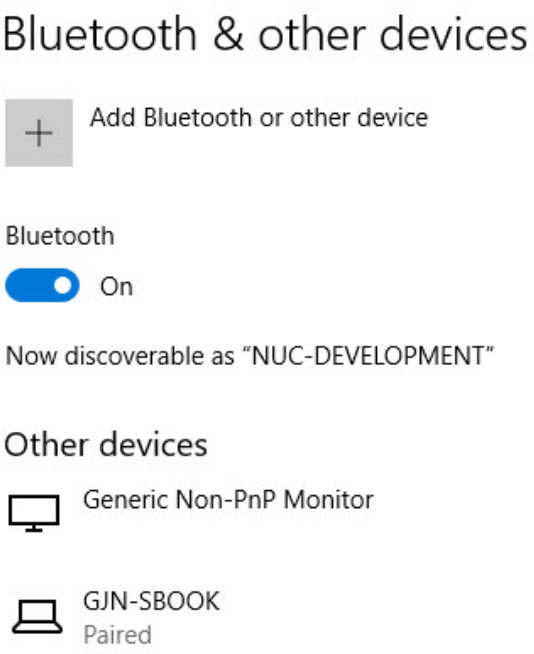


Press the Bluetooth button on the RFD8500 scanner to make the device discoverable and select the device to pair when Windows finds the device.



You must pull the trigger on the RFD8500 to accept the pairing. This is unconventional and the scanner will not pair unless the trigger is pulled.

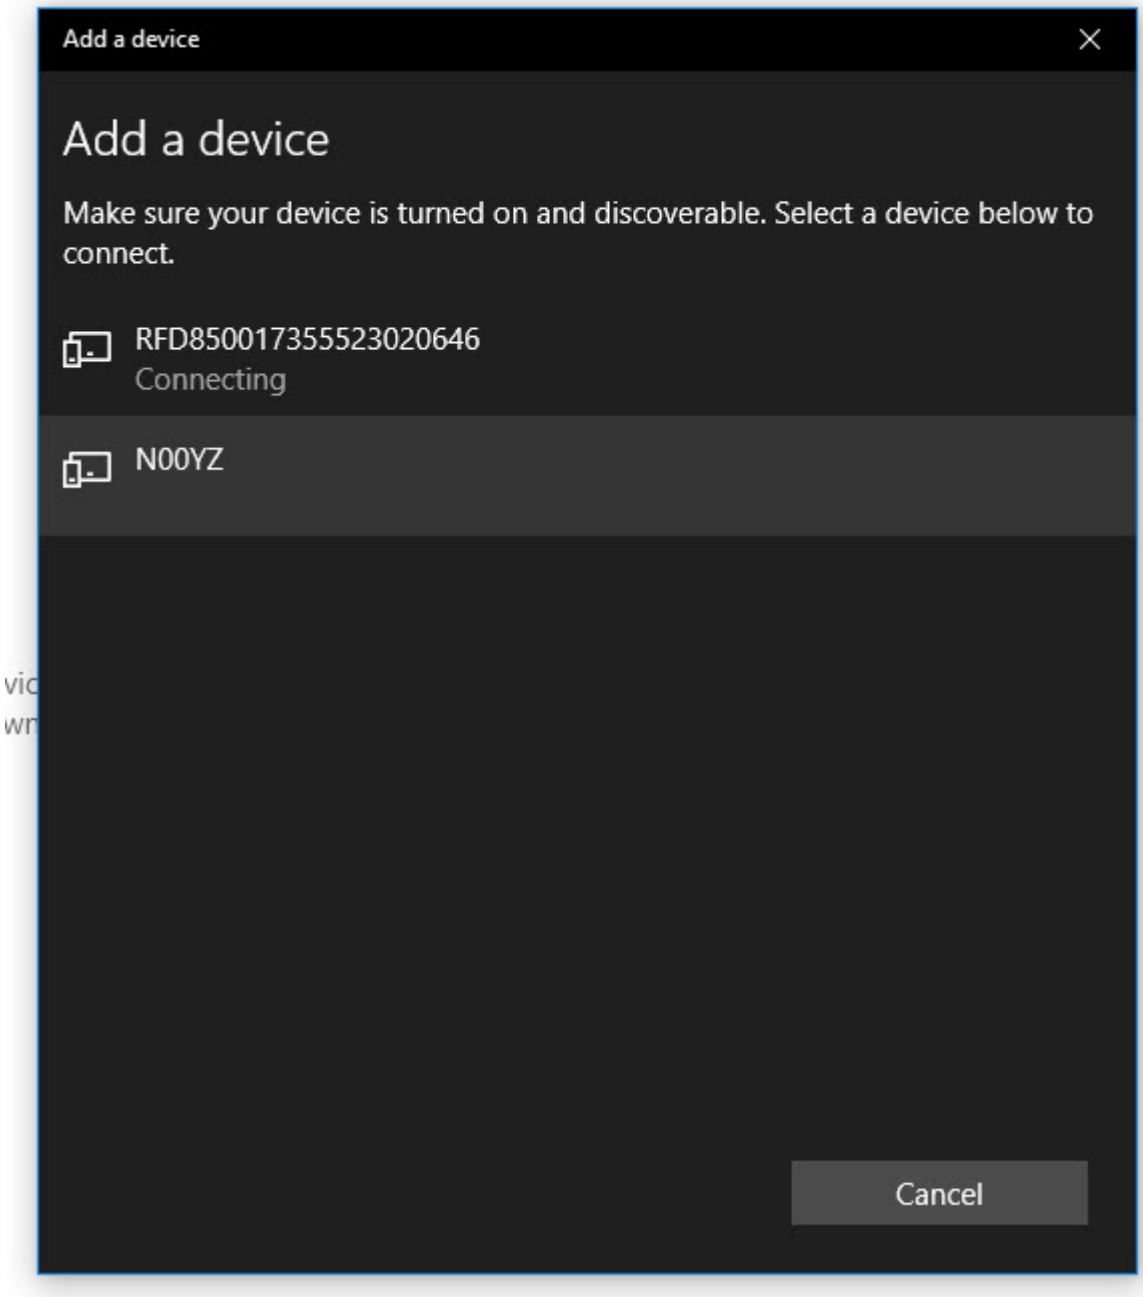

You should then see the scanner appear as a paired device.

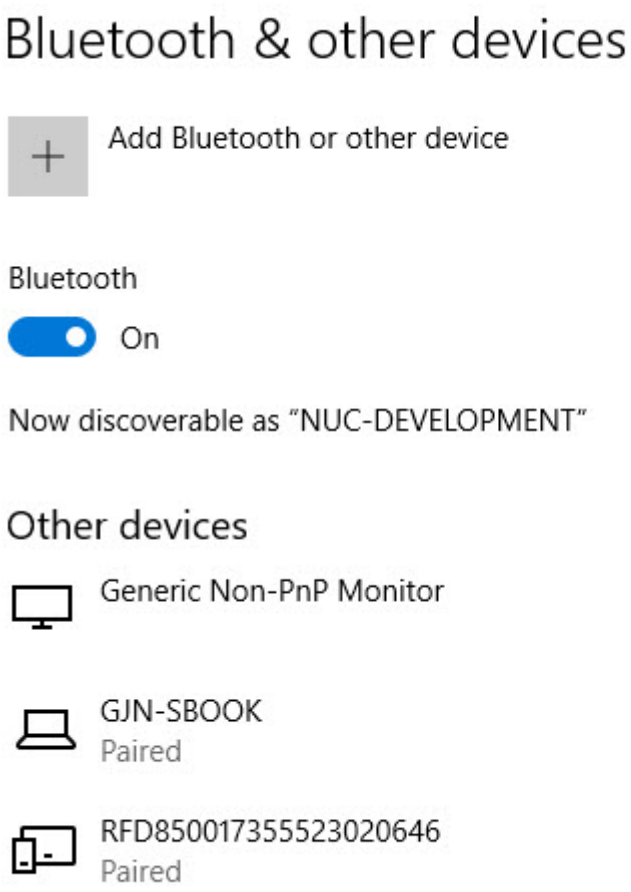

Obtaining the Virtual Communications Port

Once you have paired the RFD8500 with Windows, you will have to determine the Virtual Communications Port that has been assigned to the device.

Select `Devices and Printers` from the `Related Settings` option of the `Bluetooth & Other Devices` screen.

Right hand click on the RFD8500 Icon and select `Properties`.

From the `Properties` Dialog, select the `Services` tab and write down the `Communication Port Number for the Serial port (SSP) RFID Serial Port` Service.

This will be the Virtual Communications Port that TapeTrack will use to communicate with the RFD8500.

Links

RFD8500 Quick Start Guide

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/barcode/rfd8500?rev=1522687875

Last update: **2025/01/21 22:07**