


# Overview

A Zone is a specific location where Volumes can be Slotted. Most commonly, Zones are shelving units, cabinets, or high-density storage drawers. You must [create a zone](#) before it can be applied to a repository.


## Associating a Zone with a Repository

Once Zones are set in [Zone Administration](#), they must be added to the appropriate Repository.

Select the Customer and Media type that the zone/s will be applied to.

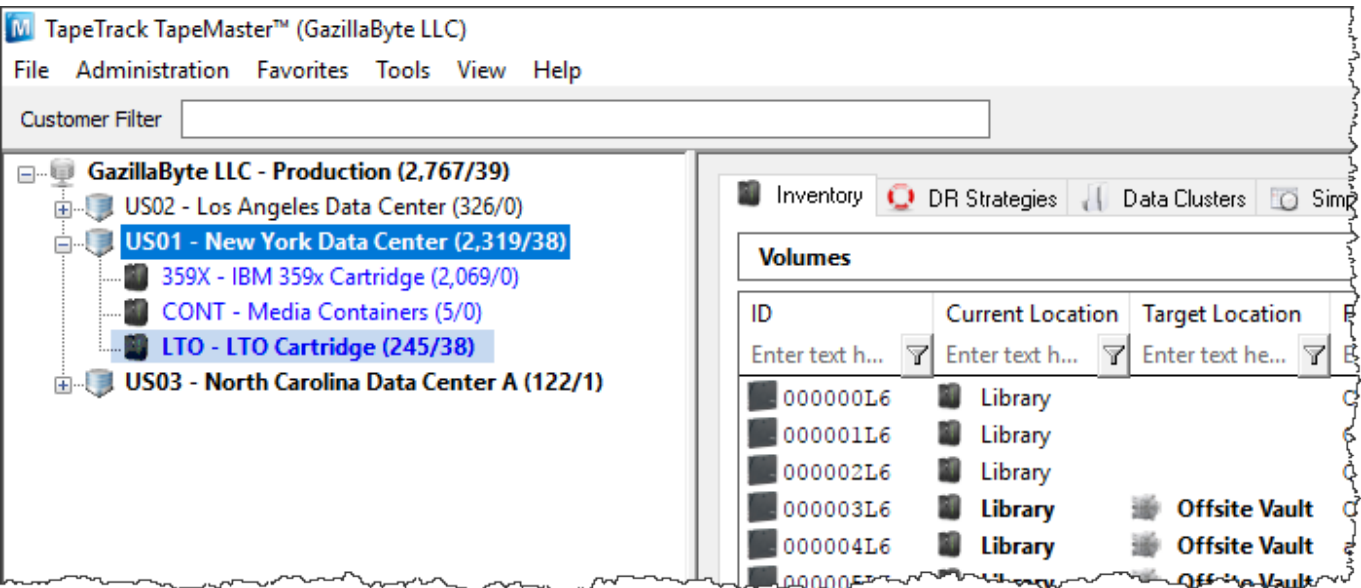

Right click the required repository and select Properties, or double click the repository.

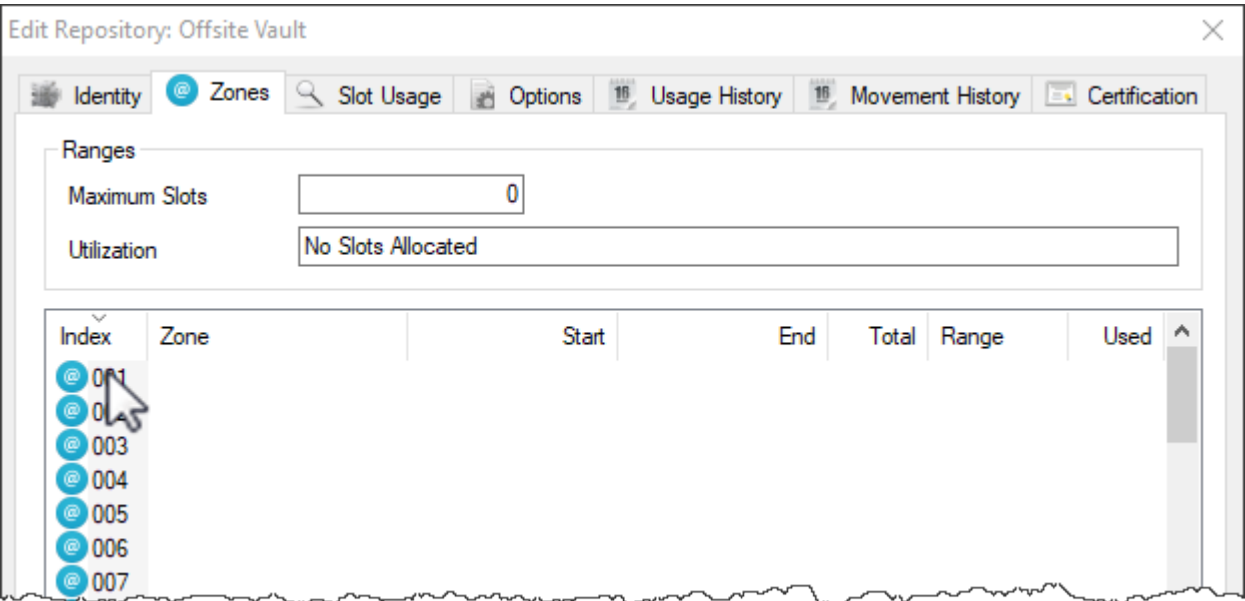

From the drop down list Zone ID select the zone required.

Adjust the slider Slot Ranges to only include the slot allocation required from the zone. Selected slots can be all or adjusted in from either the start or end but must be sequential.

Edit Range Information

Zone Selection

Zone-ID0001GemTrac 1

Slot Start1Level 01, Slot S01

Slot End450Level 10, Slot S45

Slot Total450

Slots/Level45

Slot Ranges

Start Slot1Level/Slot11

End Slot350Level/Slot835

Total Slots350

OK

Cancel

| C-ID | M-ID | R-ID | Start              | Slot | End                | Slot | Total |
|------|------|------|--------------------|------|--------------------|------|-------|
| US01 | LTO  | OFFS | Level 01, Slot S01 | 1    | Level 10, Slot S45 | 450  | 450   |

Click OK to save zone allocation.

Multiple zones can be added to a repository, to increase slot capacity, by repeating the process as required.

From:

<https://docs.tapetrack.com/> - TapeTrack Documentation

Permanent link:

[https://docs.tapetrack.com/master/repository\\_assign\\_zone?rev=1502817879](https://docs.tapetrack.com/master/repository_assign_zone?rev=1502817879)

Last update:

2025/01/21 22:07



<https://docs.tapetrack.com/>

Printed on 2026/09/21 06:13