


Volumes Added Within A Defined Date Range, Currently Located In A Selected Repository

Listing all **Volumes** added to TapeTrack within a defined range of dates and currently located within a selected **Repository** is a two-step process.

You must first extract an inventory listing of all **Volumes** added between the specified range of dates. Then use that file to compare against a listing of all **Volumes** located in the selected repository and extract all **Volumes** that appear in both Inventories and export to file.

The comparison of the **Volumes** within the files also requires the use of a Configuration file and a Definition file to extract the data in the correct format.

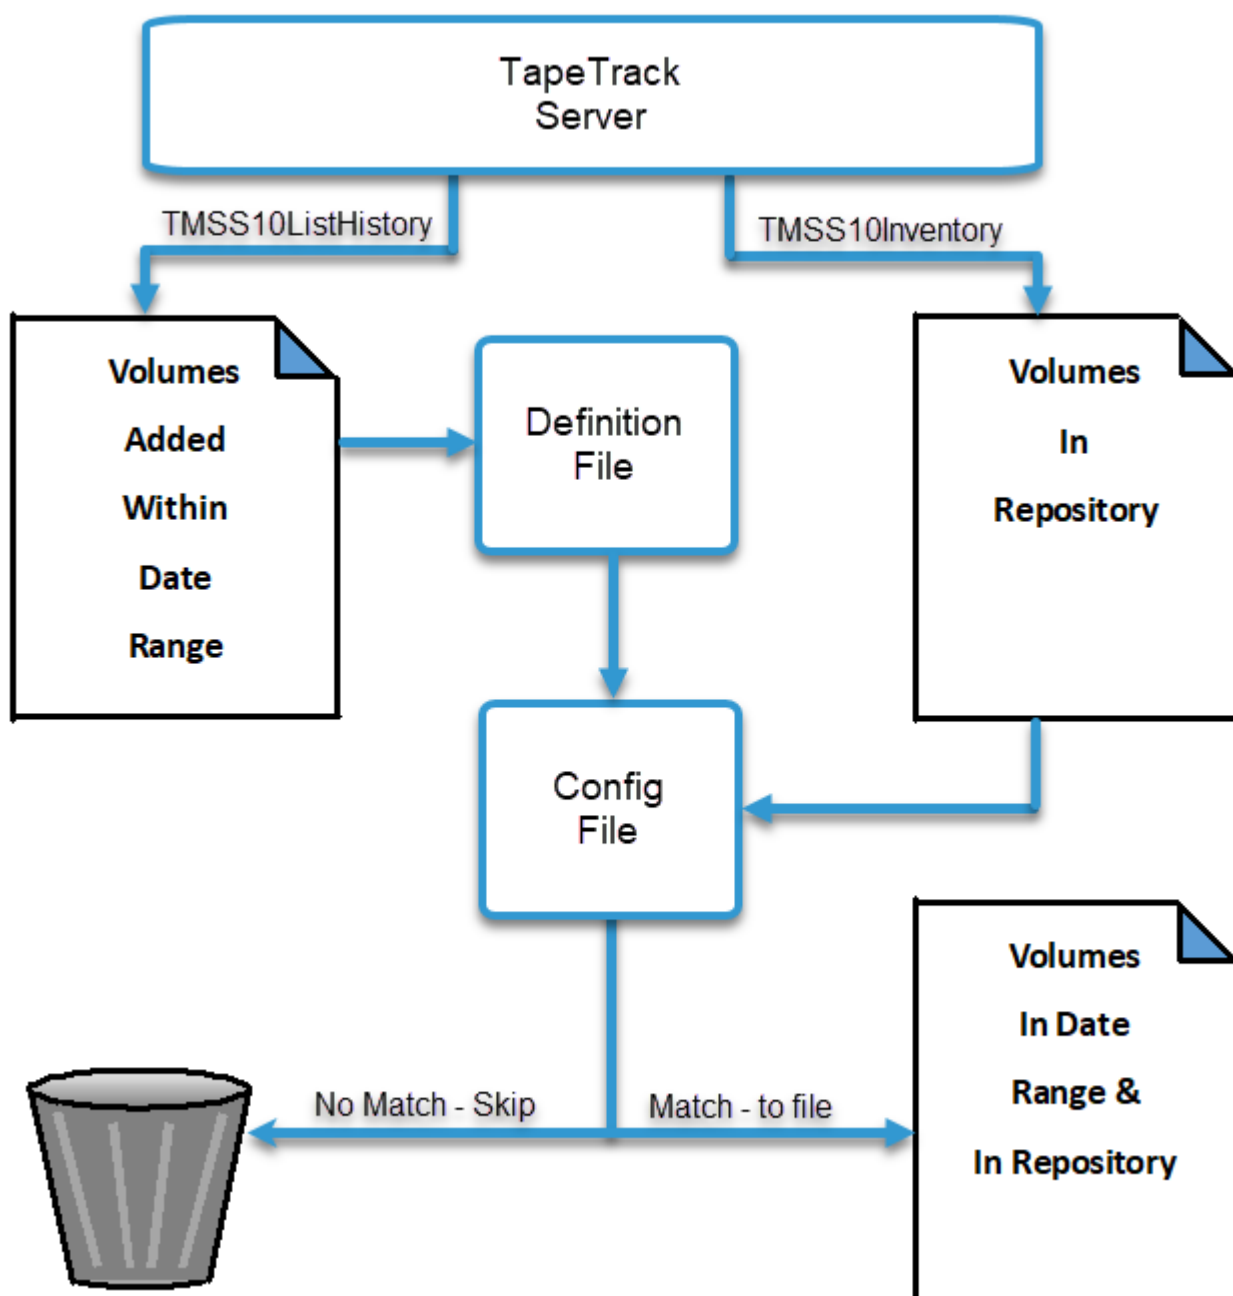

Extracting An Inventory Of Volumes Added Within A Defined Date Range

Using the command line program [TMSS10ListHistory](#), along with the Attributes:

- -S user:-password@server: Logon access
- -R "YYYY-MM-DD:YYYY-MM-DD": Specify the date range required.
- -t "*Added*": Extract only Volume Added records
- -V "CUST.MEDIA.*": Limit customer and media types extracted if required

Output from this process is captured and written to file using stdout.

To extract all volumes added between the start of the year 2000 and the end of 2010 and write to file historyOut.txt

```
<sxh plain;> TMSS10ListHistory -S user:-password@server -R "2000-01-01:2010-12-31" -t "*Added*"
-V "*.*.*" > historyOut.txt </sxh>
```

Configuration File

The configuration file is used for traversal of the history (volumes added) file for comparison of volumes currently in the selected repository.

The following example instructs TapeTrack to compare each Volume-ID to the scanfile, if it is present include it in, otherwise skip it and move to the next volume.

```
<sxh plain;> traversal {
```

```
scanfile= { file="scanfile.ttidef"; };
customer =
(
  {
    id="*";
    media =
    (
      {
        id="*";
```

```
        volume =
        (
          {
            id="*";
            scanfile = true;
            skip=false;
          },
          {
            id="*";
            skip=true;
```

```
};  
    }  
);  
}  
);  
};  
);
```

```
}; </sxh>
```

Definition File

The definition file (default.ttidef) is used to instruct TapeTrack how the data is formatted in the extracted file.

```
<sxh plain;> # input file for volume comparison (TMSS10ListHistory output) SetFile("historyOut.txt");  
# extract Volume-ID Extract(BARCODE, 1, 15, 0);  
# skip header (9 lines) SetHeaderCount(9);  
# exclude any line starting with - AddString(Exclusion, 0, "-*"); </sxh>
```

Inventory Of Volumes Added Within A Defined Date Range Located In A Specified Repository

Using the list of volumes added between the defined date range, we now compare that list to the inventory located at the specified repository and output the volumes to file.

```
<sxh plain;> TMSS10Inventory -S tapemaster:-@localhost -V "*.*.*@OFFS" -c "inventory.cfg" >  
inventoryout.txt 2> inventoryerr.txt </sxh>
```

or if you prefer CSV output with unqualified Volume-ID's, set the environmental variables TMSSREPORTFORMAT and TMSSUNQUALIFIEDVOLUME.

```
<sxh plain;> set TMSSUNQUALIFIEDVOLUME=1 set TMSSREPORTFORMAT=CSV
```

```
TMSS10Inventory -S tapemaster:-@localhost -V "*.*.*@OFFS" -c "inventory.cfg" > inventoryout.txt 2>  
inventoryerr.txt </sxh>
```

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

https://docs.tapetrack.com/cli/list_added_at_repository?rev=1578269351

Last update: **2025/01/21 22:07**

