


Volumes Added Within A Defined Date Range, Currently Located In A Selected Repository

Listing all **Volumes** added to TapeTrack within a defined range of dates and currently located within a selected **Repository** is a two-step process.

You must first extract an inventory listing of all **Volumes** added between the specified range of dates. Then use that file to compare against a listing of all **Volumes** located in the selected **Repository** and extract all **Volumes** that appear in both Inventories and export to file.

The comparison of the **Volumes** within the files also requires the use of a Configuration file and a Definition file to extract the data in the correct format.

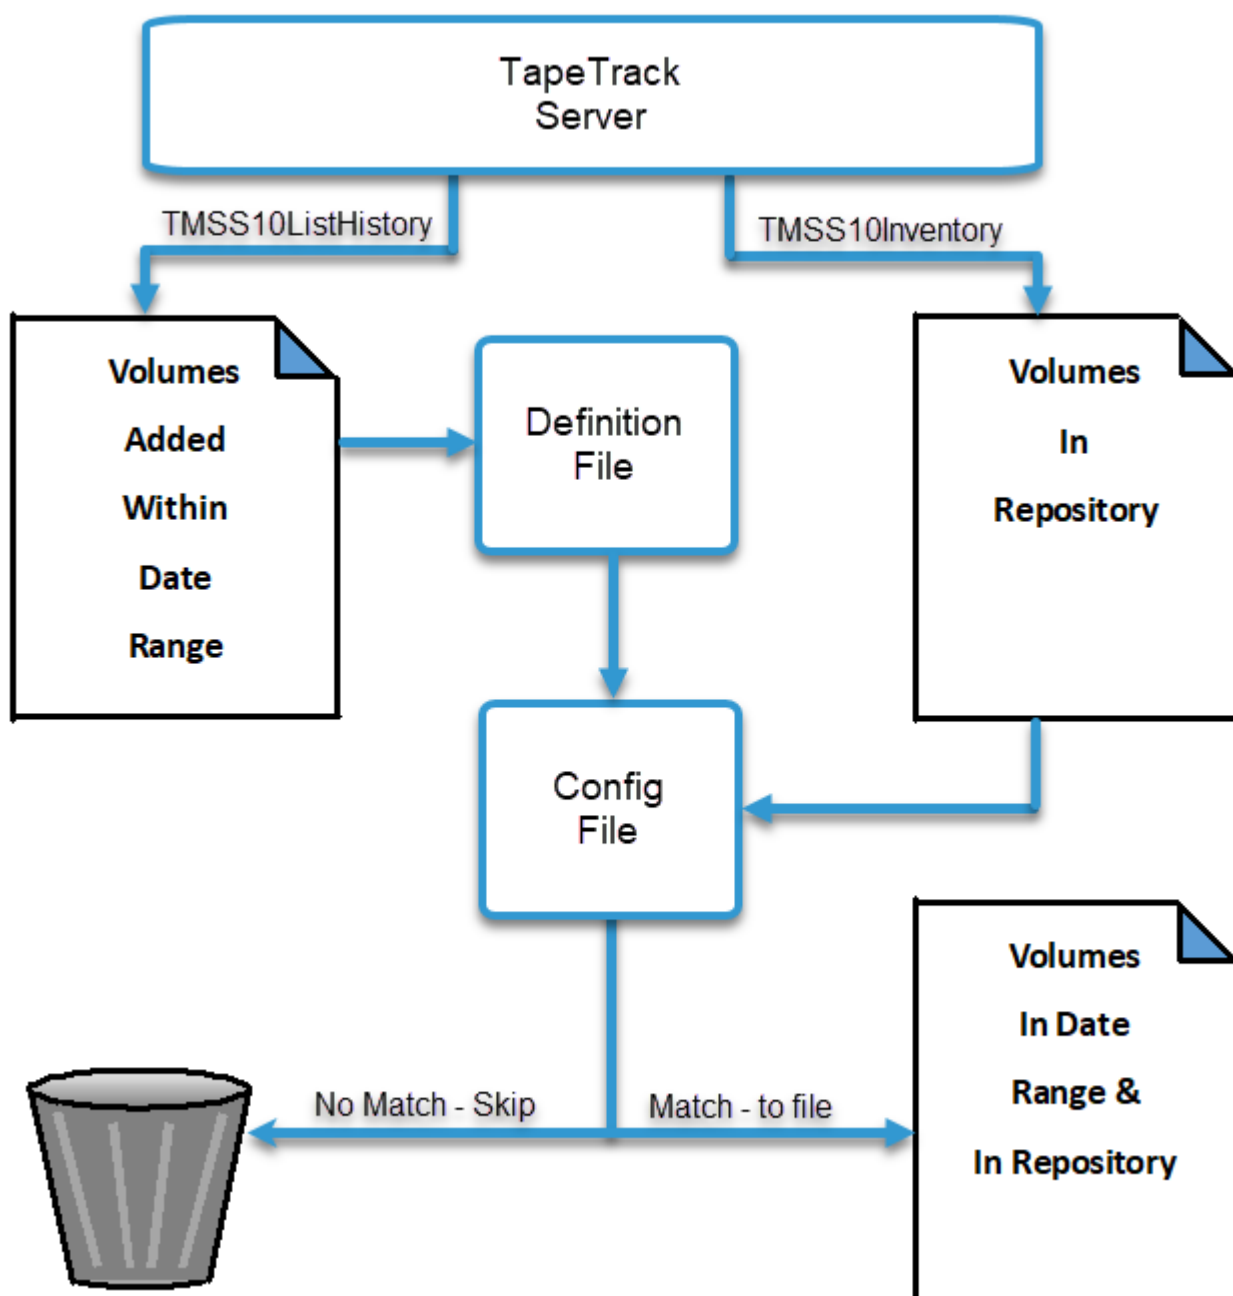

Extracting An Inventory Of Volumes Added Within A Defined Date Range

Using the command line program [TMSS10ListHistory](#), along with the Attributes:

- -S user:-password@server: Logon access
- -R "YYYY-MM-DD:YYYY-MM-DD": Specify the date range required.
- -t "*Added*": Extract only Volume Added records
- -V "CUST.MEDIA.*": Limit customer and media types extracted if required

Output from this process is captured and written to file using stdout.

To extract all [Volumes](#) added between the start of the year 2000 and the end of 2010 and write to file historyOut.txt

```
<sxh plain;> TMSS10ListHistory -S user:-password@server -R "2000-01-01:2010-12-31" -t "*Added*"
-V "*.*.*" > historyOut.txt </sxh>
```

Configuration File

The configuration file is used for traversal of the history ([Volumes](#) added) file for comparison of [Volumes](#) currently in the selected repository.

The following example instructs TapeTrack to compare each [Volume-ID](#) to the Scanfile, if it is present include it in, otherwise skip it and move to the next [Volume](#).

```
<sxh plain;> traversal {
```

```
scanfile= { file="scanfile.ttidef"; };
customer =
(
    {
        id="*";
        media =
        (
            {
                id="*";
```

```
                volume =
                (
                    {
                        id="*";
                        scanfile = true;
                        skip=false;
                    },
                    {
                        id="*";
                        skip=true;
```

```
};  
    }  
);  
}  
);  
};  
);
```

```
}; </sxh>
```

Definition File

The definition file (default.ttidef) is used to instruct TapeTrack how the data is formatted in the extracted file.

```
<sxh plain;> # input file for volume comparison (TMSS10ListHistory output) SetFile("historyOut.txt");  
# extract Volume-ID Extract(BARCODE, 1, 15, 0);  
# skip header (9 lines) SetHeaderCount(9);  
# exclude any line starting with - AddString(Exclusion, 0, "-*"); </sxh>
```

Inventory Of Volumes Added Within A Defined Date Range Located In A Specified Repository

Using the list of [Volumes](#) added between the defined date range, we now compare that list to the Inventory located at the specified [Repository](#) and output the [Volumes](#) to file.

```
<sxh plain;> TMSS10Inventory -S tapemaster:-@localhost -V "*.*.*@OFFS" -c "inventory.cfg" >  
inventoryout.txt 2> inventoryerr.txt </sxh>
```

or if you prefer CSV output with unqualified Volume-ID's, set the environmental variables TMSSREPORTFORMAT and TMSSUNQUALIFIEDVOLUME.

```
<sxh plain;> set TMSSUNQUALIFIEDVOLUME=1 set TMSSREPORTFORMAT=CSV
```

```
TMSS10Inventory -S tapemaster:-@localhost -V "*.*.*@OFFS" -c "inventory.cfg" > inventoryout.txt 2>  
inventoryerr.txt </sxh>
```

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

https://docs.tapetrack.com/cli/list_added_at_repository?rev=1578270003

Last update: **2025/01/21 22:07**

