

TMSS10BatchLoader

TMSS10BatchLoader creates [Customer](#), [Media](#) and [Repositories](#) by loading a Configuration file into the TapeTrack Database.

Synopsis

```
TMSS10BatchLoader [-c configuration file] [-S logonstring]
```

Options

- -c The config file argument specifies the path to the Batch Configuration File.
- -S Logon string argument sets the [Server logon information](#).

Editable Fields

- [Customer-ID](#)
- [Customer Description](#)
- [Media-ID](#)
- [Media Description](#)
- [Repository-ID](#)
- [Repository Description](#)
- Repository Icon
 -  Rack (value = 0)
 -  Transport (value = 1)
 -  Vault (value = 2)
 -  Library (value = 3)
 -  Legal Hold (value = 4)
 -  Disaster Recovery (value = 5)
 -  Destruction (value = 6)
 -  Ordered (value = 7)
 -  Scratch (value = 8)
- [Next Repository](#)
- [Auto Container flag](#)

Technical Support

The TapeTrack Software is commercially supported by a full time help desk staff.

If you are experiencing problems or want some advice on how to configure or use the product please see the [Accessing Technical Support](#) page.

Exit Statuses

1. **zero** Program has ended successfully.
2. **non-zero** Program has not ended successfully.

Environment

Files

stderr: Diagnostic messages.

Example

Configuration File

Configuration file to create two [Customers](#) with Attributes:

Customer 0001

- [Customer-ID](#): US01, [Customer Description](#): New York Data Center.
- [Media-ID](#): LTO, [Media Description](#): LTO Cartridge.
- [Repository-ID](#): LIBR, [Repository Description](#): Library, [Repository Type](#): 1, [Next Repository](#): OFFS.
- [Repository-ID](#): OFFS, [Repository Description](#): Iron Mountain, [Repository Type](#): 2.
- [Repository-ID](#): DEST, [Repository Description](#): Destroyed, [Repository Type](#): 6.
- [Repository-ID](#): HOLD, [Repository Description](#): Legal Hold, [Repository Type](#): 4 .

Customer 0002

- [Customer-ID](#): US02, [Customer Description](#): Los Angeles Data Center.
- [Media-ID](#): 3490, [Media Description](#): IBM 3490 Cartridge.
- [Repository-ID](#): LIBR, [Repository Description](#): Library, [Repository Type](#): 1, [Next Repository](#): OFFS.
- [Repository-ID](#): OFFS, [Repository Description](#): Iron Mountain, [Repository Type](#): 2 and [Next Repository](#): LIBR.

[Download Sample Configuration file.](#)

<sxh> setup= {

```
customers=
(
  {
    id="US01"; description="New York Data Center";
```

```
    media=
    (
      {
```

```
id="LT0"; description="LT0 Cartridge";
```

```

    repositories=
    (
        { id="LIBR"; description="Library"; type=3; next="OFFS";
},
        { id="OFFS"; description="Iron Mountain"; type=2;
next="LIBR"; },
        { id="DEST"; description="Destroyed"; type=6; },
        { id="HOLD"; description="Legal hold"; type=4; }
    )
},
{
    id="3490"; description="IBM 3490 Cartridge";

```

```

    repositories=
    (
        { id="LIBR"; description="Library"; type=3; next="OFFS";
},
        { id="OFFS"; description="Iron Mountain"; type=2;
next="LIBR"; }
    )
}
)
},
{
    id="US02"; description="Los Angeles Data Center";

```

```

media=
(
    {
        id="LT0"; description="LT0 Cartridge";

```

```

    repositories=
    (
        { id="LIBR"; description="Library"; type=3; },
        { id="OFFS"; description="Iron Mountain"; type=2; }
    )
},
{
    id="3490"; description="IBM 3490 Cartridge";

```

```

    repositories=
    (
        { id="LIBR"; description="Library"; type=3; },
        { id="OFFS"; description="Iron Mountain"; type=2; }
    )
}
)
}

```


```
);
```

```
}; </sxh>
```

Command line syntax

```
<sxh>TMSS10BatchLoader -S user:-password@localhost -c master.cfg</sxh>
```

Output Results

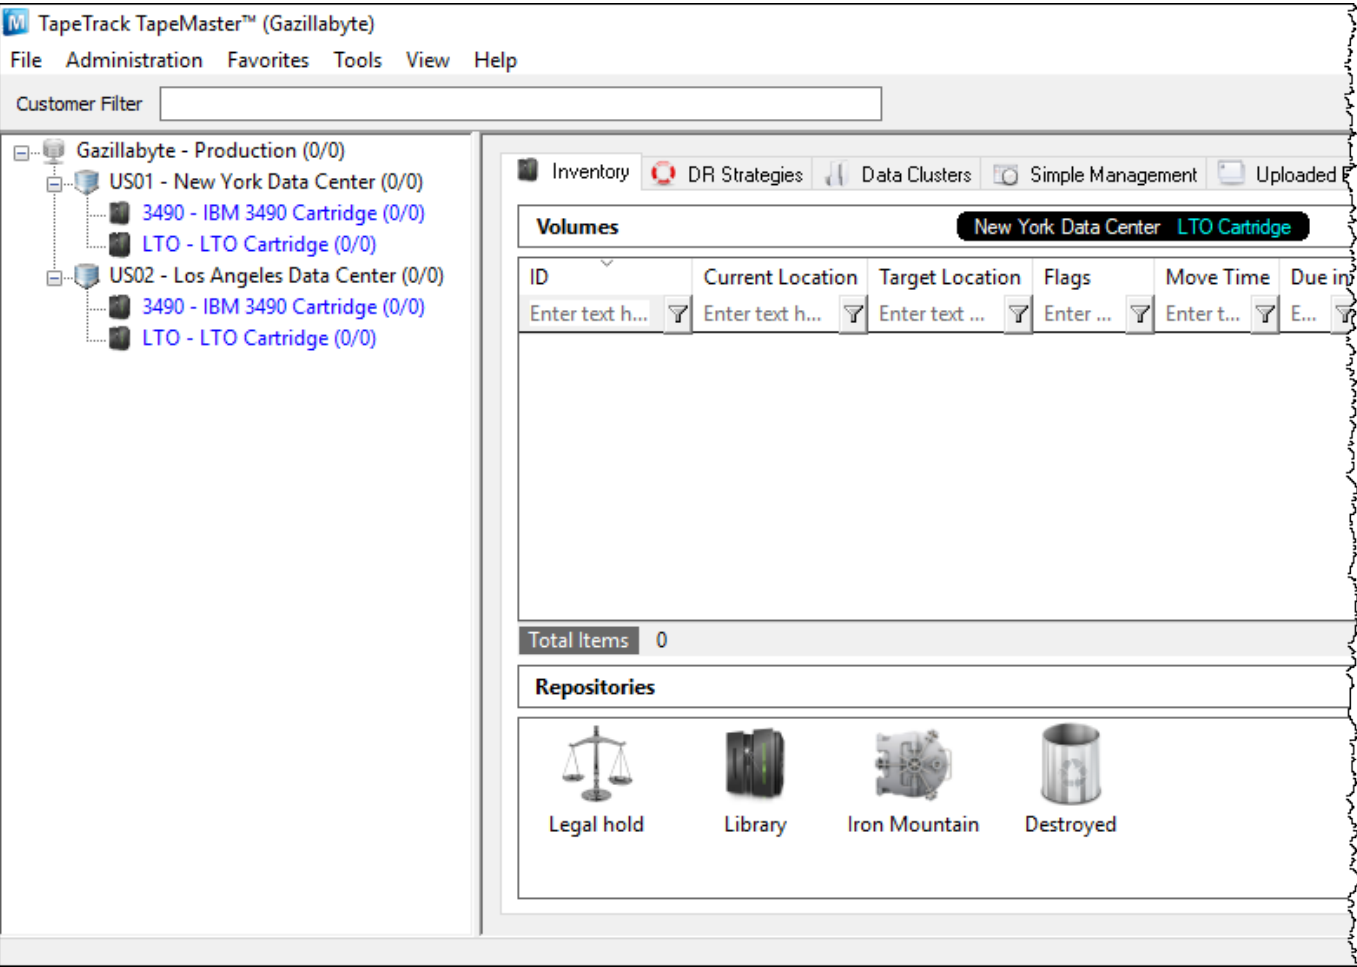

Configuration Files - Minimising Duplicate Code

When creating multiple [Customers](#) with identical [Media Types](#) and/or [Repositories](#) it is possible to create a configuration file with these Attributes and include it in the master configuration file to save duplication of code blocks.

To create two customers, US01 and US02, with:

- [Media-ID](#): LTO, [Media Description](#): LTO Cartridge.
- [Media-ID](#): 3490, [Media Description](#): IBM 3490 Cartridge.

- [Repository-ID](#): LIBR, [Repository Description](#): Library, [Repository Type](#): 1, [Next Repository](#): OFFS.
- [Repository-ID](#): OFFS, [Repository Description](#): Iron Mountain, [Repository Type](#): 2 and [Next Repository](#): LIBR.

A configuration file may “include” the contents of another file using an include directive.

This directive has the effect of in-lining the contents of the named file at the point of inclusion.



An include directive must appear on its own line in the input. It has the form:

```
@include "filename"
```

Any backslashes or double quotes in the filename must be escaped as '\\\' and '\\"', respectively.

Configuration Files

master.cfg

```
<sxh> setup= {
```

```
customers=
(
  {
    id="US01"; description="New York Data Center";
    @include "include.cfg"
  },
  {
    id="US02"; description="Los Angeles Data Center";
    @include "include.cfg"
  }
);
```

```
}; </sxh>
```

include.cfg

```
<sxh>
```

```
media=
(
  {
    id="LT0"; description="LT0 Cartridge";
```

```
repositories=
(
    { id="LIBR"; description="Library"; type=3; next="OFFS";
},
    { id="OFFS"; description="Iron Mountain"; type=2;
next="LIBR"; }
)
},
{
    id="3490"; description="IBM 3490 Cartridge";
```

```
repositories=
(
    { id="LIBR"; description="Library"; type=3; next="OFFS";
},
    { id="OFFS"; description="Iron Mountain"; type=2;
next="LIBR"; }
)
}
)
```

</sxh>

Command line syntax

<sxh>TMSS10BatchLoader -S user:-password@localhost -c master.cfg</sxh>

Output Results



From:
<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:
<https://docs.tapetrack.com/cli/tmss10batchloader?rev=1578366848>

Last update: **2025/01/21 22:07**

