Adding a Desktop Server Connection

When using the TapeTrack Desktop Software you will have to have one or more TapeTrack Framework Server entries defined so that you can connect to a server endpoint.

To configure a server you will need the following information:

1. The server IP address or DSN name.
2. The server port (usually 5000).
3. If you are connecting via a HTTP Proxy:
    - The proxy IP address or DNS Name.
    - The proxy port
    - The proxy user name (if authentication is required)
    - The proxy password (if authentication is required)


This can be done in the following ways:


1. Adding a connection interactively.
2. Adding a connection to the Configuration File.
3. Clicking on a URL.
4. Clicking a Windows Registry File.





When using TapeTrack TapeMaster that was installed as part of the TapeTrack Framework Server installation, an entry for localhost will be automatically added by the installer.

Adding a connection interactively

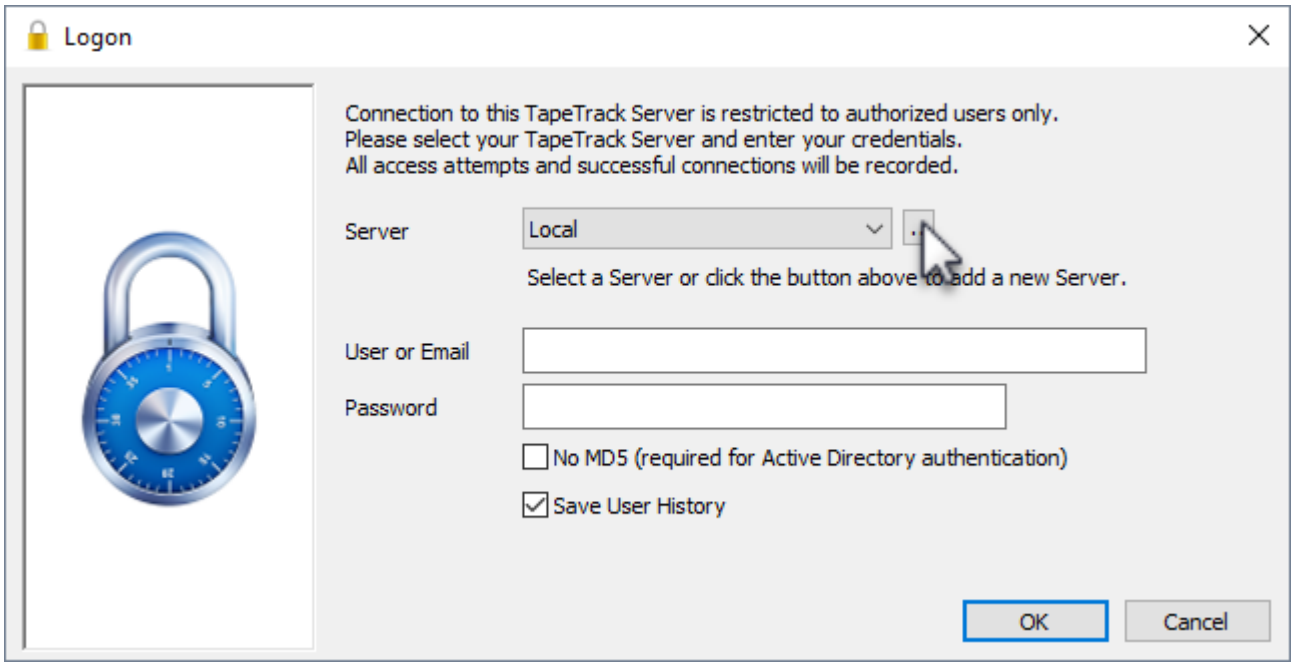

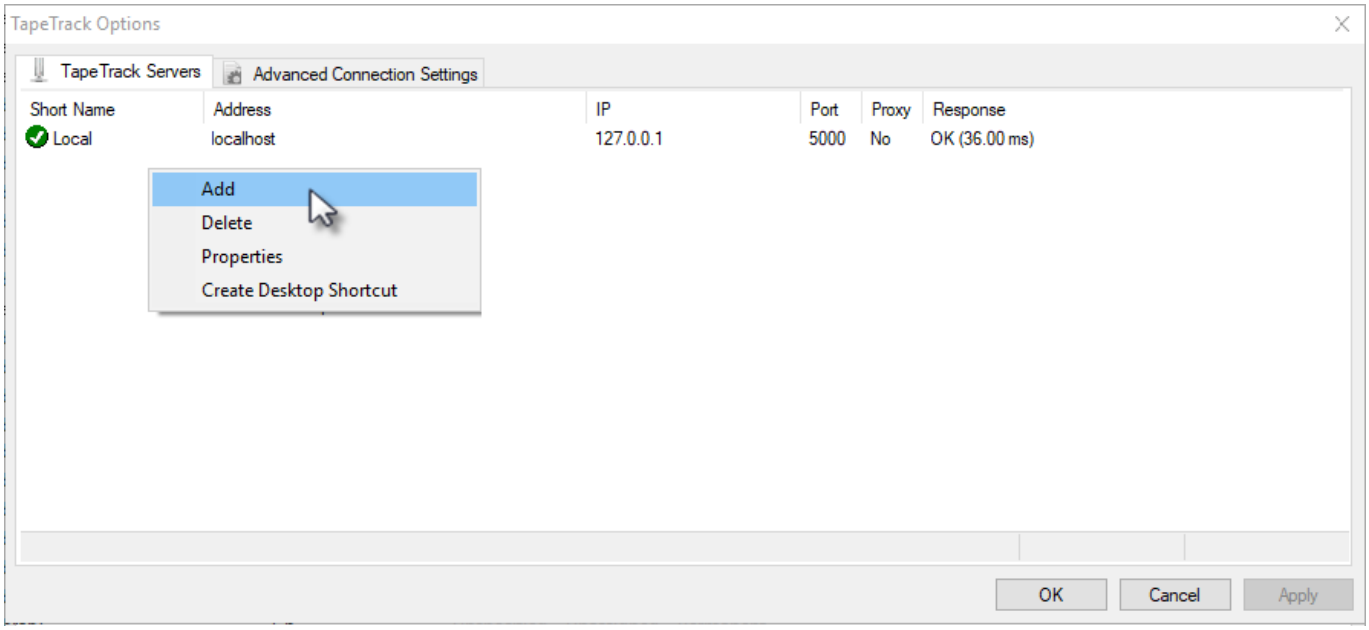
TapeTrack Options
TapeTrack Servers
Advanced Connection Settings
Short Name
Address
IP
Port
Proxy
Response
Local
localhost
127.0.0.1
5000
No
OK (36.00 ms)
Add
Delete
Properties
Create Desktop Shortcut
OK
Cancel
Apply

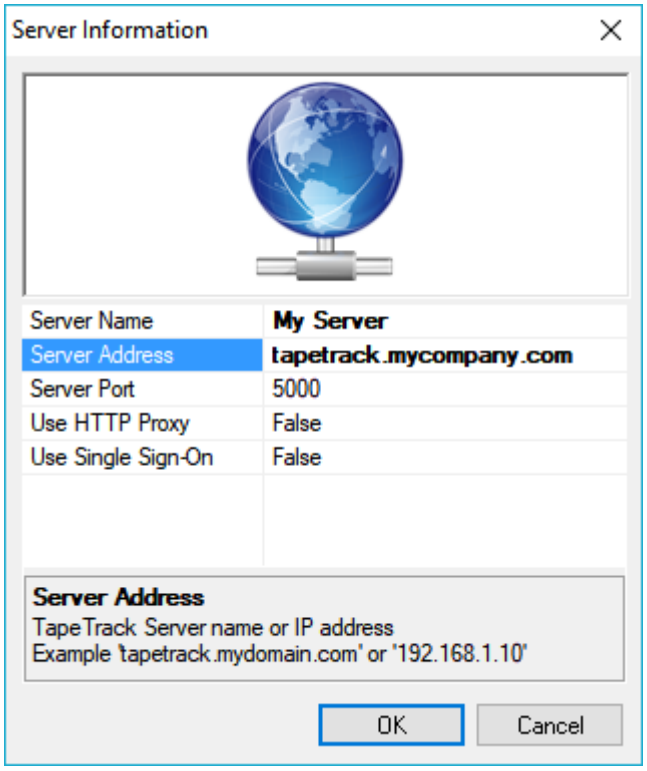
Server Information
Server Name
My Server
Server Address
tapetrack.mycompany.com
Server Port
5000
Use HTTP Proxy
False
Use Single Sign-On
False
Server Address
TapeTrack Server name or IP address
Example 'tapetrack.mydomain.com' or '192.168.1.10'
OK
Cancel

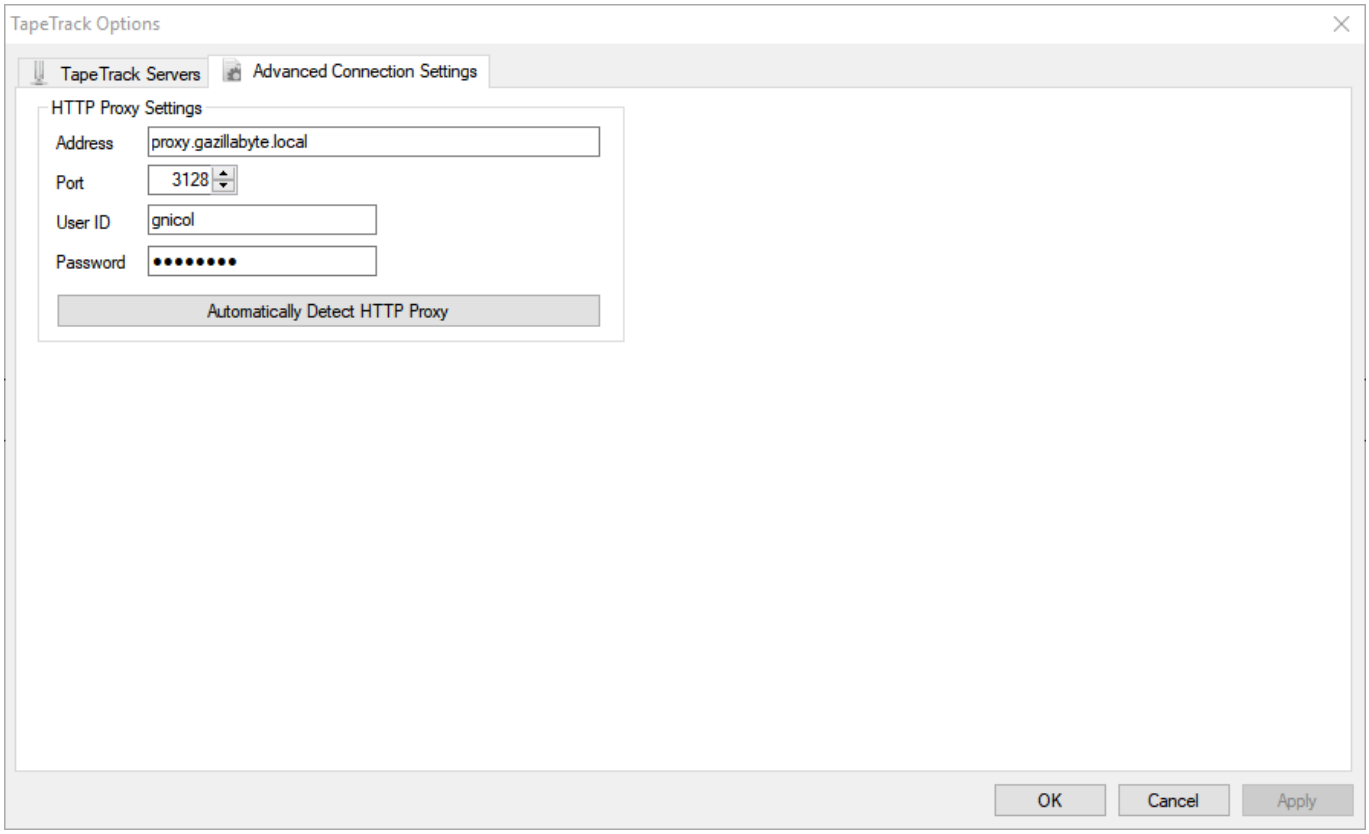

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/desktop/adding_connection?rev=1504540269

Last update: **2025/01/21 22:07**