# Adding a Desktop Server Connection

## Overview

When using the TapeTrack Desktop Software you will have to have one or more TapeTrack Framework Server entries defined so that you can connect to a server endpoint.

This can be done in the following ways:

1. Adding a connection interactively.
2. Adding a connection to the Configuration File.
3. Clicking on a URL.
4. Clicking a Windows Registry File.



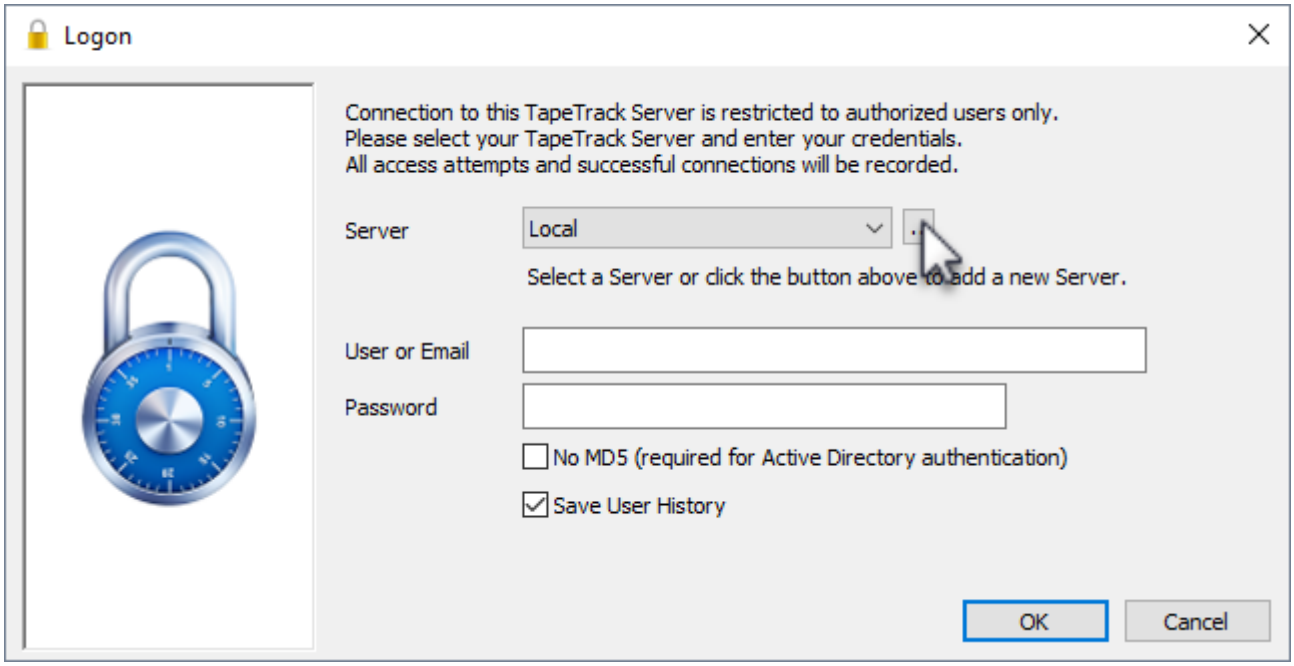
When using TapeTrack TapeMaster that was installed as part of the TapeTrack Framework Server installation, an entry for localhost will be automatically added by the installer.

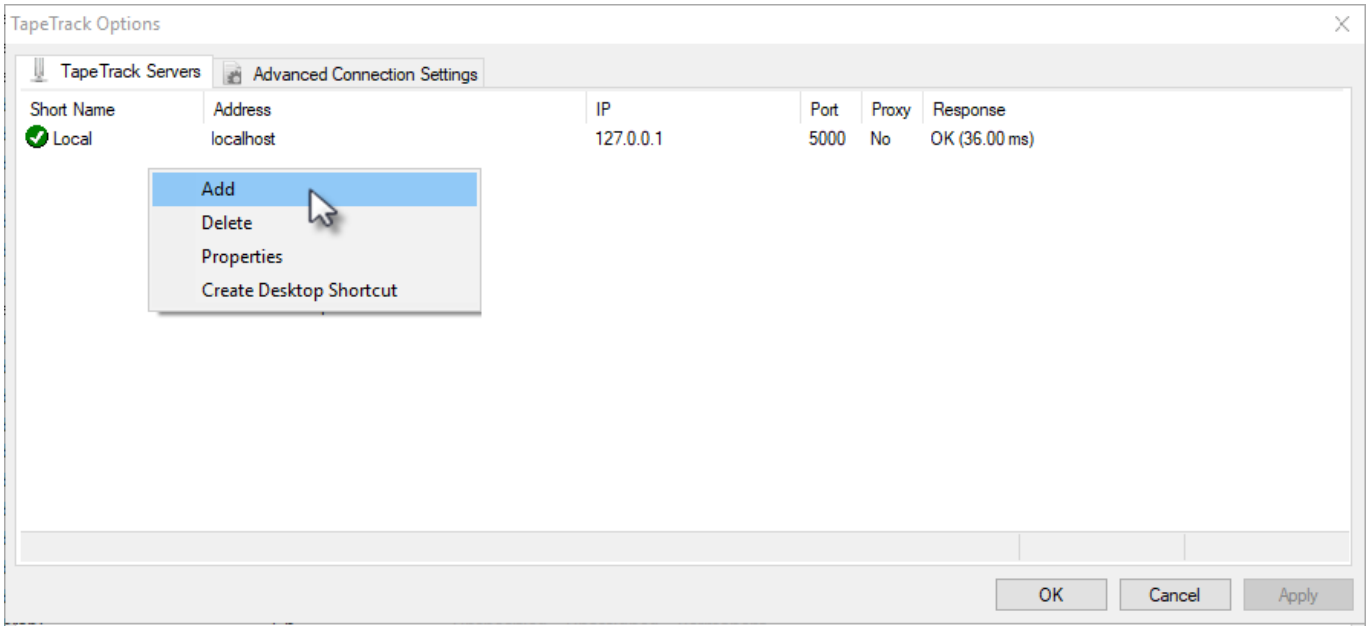
## Prerequisites

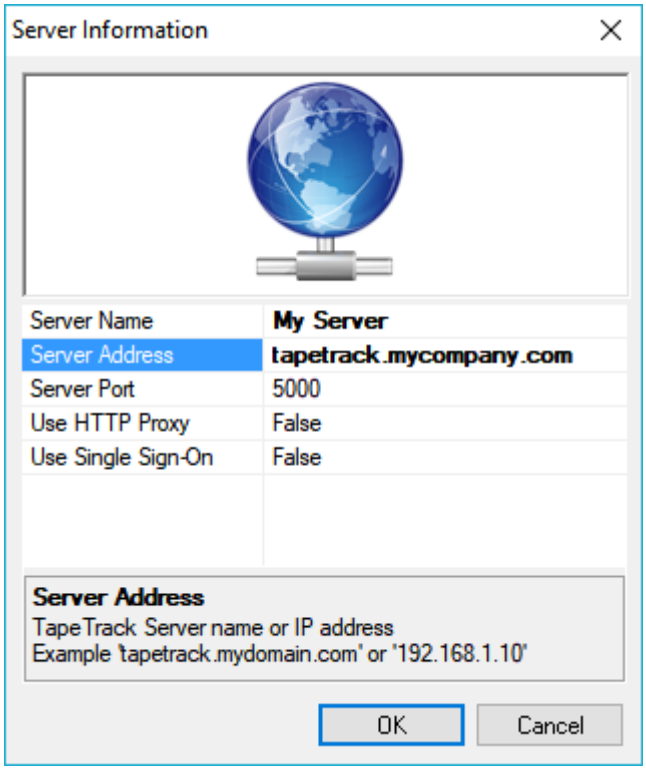
To configure a server you will need the following information:

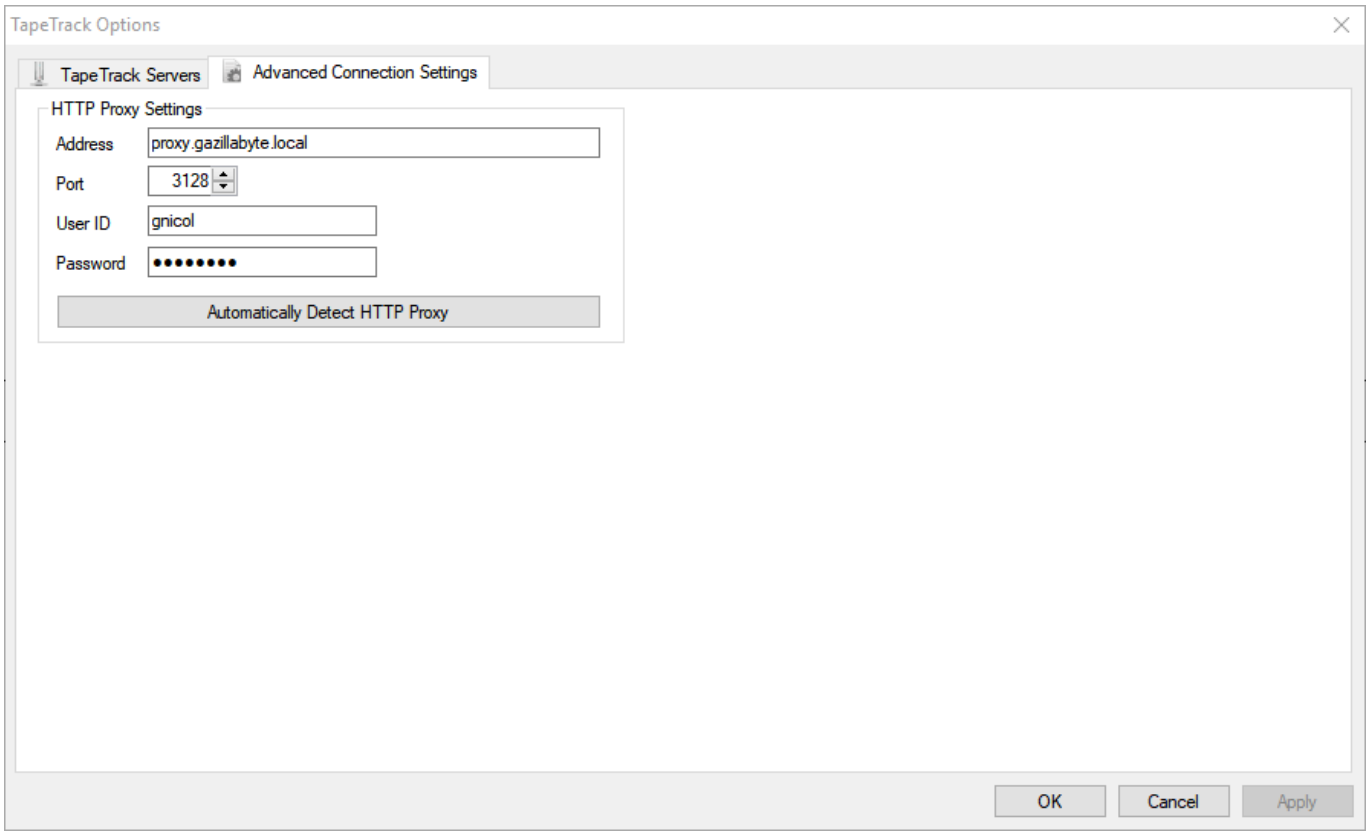
1. The server IP address or DSN name.
2. The server port (usually 5000).
3. If you are connecting via a HTTP Proxy:
    - The proxy IP address or DNS Name.
    - The proxy port
    - The proxy user name (if authentication is required)
    - The proxy password (if authentication is required)

## Adding a connection interactively


Logon
Connection to this TapeTrack Server is restricted to authorized users only.
Please select your TapeTrack Server and enter your credentials.
All access attempts and successful connections will be recorded.
Server
Local
Select a Server or click the button above to add a new Server.
User or Email
Password
No MD5 (required for Active Directory authentication)
Save User History
OK
Cancel


TapeTrack Options
TapeTrack Servers
Advanced Connection Settings
Short Name
Address
IP
Port
Proxy
Response
Local
localhost
127.0.0.1
5000
No
OK (36.00 ms)
Add
Delete
Properties
Create Desktop Shortcut
OK
Cancel
Apply




From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
**https://docs.tapetrack.com/desktop/adding_connection?rev=1504547684**

Last update: **2025/01/21 22:07**