

Adding and Maintaining Barcode Administrations


Barcode Administration is used to create and maintain [Barcode Rules](#).

Without Barcode Administration Rules set, [Barcodes](#) cannot be read while using the [Desktop Scanning Window](#).

Each [Barcode Rule](#) defines which characters in a given [Barcode](#) correspond with the [Customer-ID](#), [Media-ID](#), and [Volume-ID](#).

Barcode Administration

To add, view or modify a [Barcode Rule](#) open the Barcode Administration window by selecting Administration → Barcode Administration.

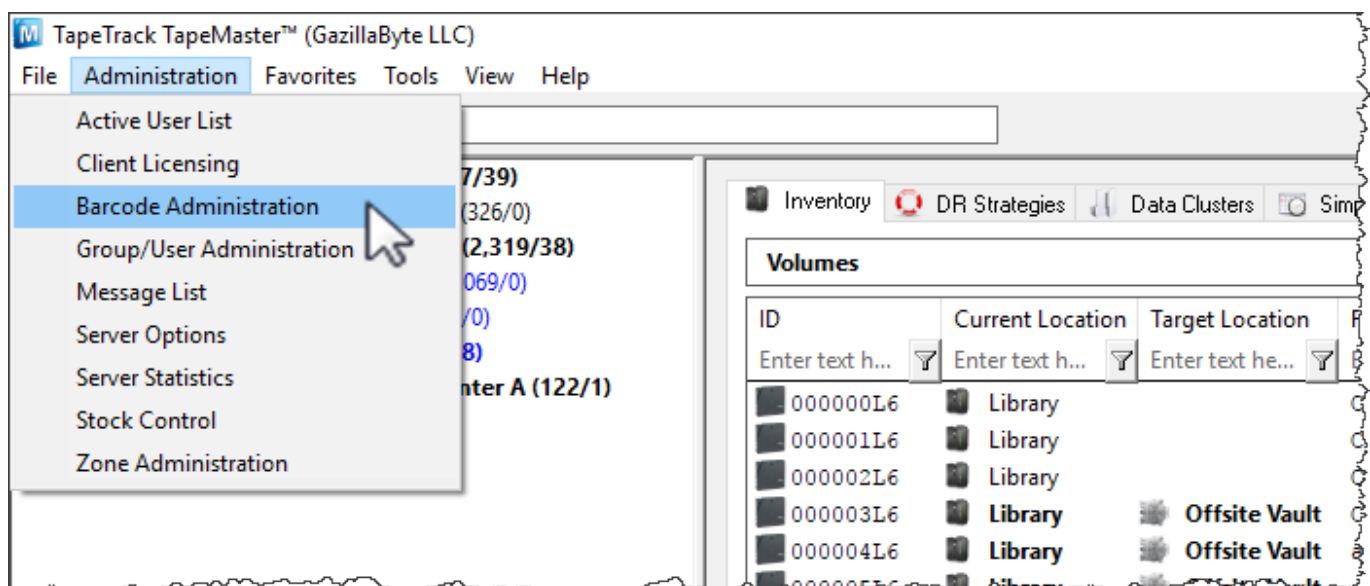

Add a Barcode Rule

[Barcode Rules](#) are used to identify [Volumes](#) and route them to a specific [Customer](#) or [Media Type](#).

When a [Barcode](#) is scanned, [TapeTrack TapeMaster](#) will go through the [Barcode Rule](#) List from top to bottom to identify which rule must be followed to properly identify and direct that [Volume](#).

To add a [Barcode Rule](#) right-click in the Barcode Administration window, hover the cursor over Insert and select After, Before, or At End or press the **Insert (INS)** key on the keyboard.

Barcode Administration

Handlers

Conversions

Seq.	Description	Filter	Filter...	User	Customer-ID	Media-ID
000	Generic ?.?. *	?.-??.-? *	~11 *		1-1: Length(1)	3-3: Length(1)
001	Generic ?.???. *	After	Add		1-1: Length(1)	3-4: Length(2)
002	Generic ?.????. *	Before	Delete		1-1: Length(1)	3-5: Length(3)
003	Generic ?.?????. *	At End	Print		1-1: Length(1)	3-6: Length(4)
004	Generic ???.?. *		Properties		1-2: Length(2)	4-4: Length(1)
005	Generic ???.???. *	??[-.]??[-.]*			1-2: Length(2)	4-5: Length(2)
006	Generic ???.????. *	??[-.]???[-.]*	~14 *		1-2: Length(2)	4-6: Length(3)
007	Generic ???.?????. *	??[-.]???[-.]*	~15 *		1-2: Length(2)	4-7: Length(4)
008	Generic ????.?. *	???[-.]?[-.]*	~13 *		1-3: Length(3)	5-5: Length(1)
009	Generic ????.???. *	???[-.]??[-.]*	~14 *		1-3: Length(3)	5-6: Length(2)
010	Generic ????.????. *	???[-.]???[-.]*	~15 *		1-3: Length(3)	5-7: Length(3)
011	Generic ????.?????. *	???[-.]???[-.]*	~16 *		1-3: Length(3)	5-8: Length(4)

Double-click the rule ID for the Barcode Rule called ****New**** to set parameters.

Barcode Administration

Handlers

Conversions

Seq.	Description	Filter	Filter...	User	Customer-ID	Media-ID
000	** New **		~0 *			
001	Generic ?.?. *	?[-.]?[-.]*	~11 *		1-1: Length(1)	3-3: Length(1)
002	Generic ?.???. *	?[-.]???[-.]*	~12 *		1-1: Length(1)	3-4: Length(2)
003	Generic ?.????. *	?[-.]???[-.]*	~13 *		1-1: Length(1)	3-5: Length(3)
004	Generic ?.?????. *	?[-.]???[-.]*	~14 *		1-1: Length(1)	3-6: Length(4)
005	Generic ???.?. *	??[-.]?[-.]*	~12 *		1-2: Length(2)	4-4: Length(1)
006	Generic ???.???. *	??[-.]???[-.]*	~13 *		1-2: Length(2)	4-5: Length(2)
007	Generic ???.????. *	??[-.]???[-.]*	~14 *		1-2: Length(2)	4-6: Length(3)
008	Generic ???.?????. *	??[-.]???[-.]*	~15 *		1-2: Length(2)	4-7: Length(4)
009	Generic ????.?. *	???[-.]?[-.]*	~13 *		1-3: Length(3)	5-5: Length(1)
010	Generic ????.???. *	???[-.]??[-.]*	~14 *		1-3: Length(3)	5-6: Length(2)
011	Generic ????.????. *	???[-.]???[-.]*	~15 *		1-3: Length(3)	5-7: Length(3)

Edit Barcode Window

The Edit Barcode window has four parameters:

- General Details
- Scope
- Editing
- Elements

Enabled	True
Barcode Description	Generic ????.???.*
Scope	
Barcode Pattern	???[-.]?[-.]*
User Pattern	*
Range Start	
Range End	
Editing	
Edit Mask	00000000000000000000
Strip Characters	
Elements	
Customer-ID	
Use substring	True
Substring First Character	1
Substring Last Character	4
Media-ID	
Use substring	True
Substring First Character	6
Substring Last Character	8
Volume-ID	
Use substring	True
Substring First Character	10
Substring Last Character	19

OK Cancel

General Details

- **Enabled:** When set to “True,” the [Barcode Rule](#) is active and will be used when trying to parse [Volume-ID's](#). False sets the [Barcode Rule](#) to inactive and is skipped when trying to parse [Volume-ID's](#).
- **Barcode Description:** A brief description of the [Barcode Rule](#).

Scope

- **Barcode Pattern:** The Barcode Pattern uses TapeTrack Filters to define what this type of Barcode looks like. For example, “????.???L[3-5]” would look for a 16 character Barcode with periods in character positions 4 and 8, an L in character position 15 and any number between 3 and 5 inclusive in character position 16. If a scanned Barcode does not meet this pattern, the next [Barcode Rule](#) on the list will be referenced.
- **User Pattern:** Many enterprises include [Customer-IDs](#) in their [User-IDs](#) or have various other patterns to define a [User](#). If this is the case, use TapeTrack Filters to enter patterns of [Users](#) that should have access to this rule. Using the asterisk (*) will make this [Barcode Rule](#) available to all [Users](#).
- **Range Start / Range End:** Setting a range will set the Scope of the [Barcode Rule](#) to a specific range of numbers or letters. For example, a Range of 000500L4 to 000750L4 will only apply this [Barcode Rule](#) to [Volumes](#) 000500L4 - 000750L4. [Volumes](#) below 000499L4 and above

000751L4 will require additional [Barcode Rules](#).

Editing

The Editing subsection can be set to exclude or remove specific characters from a Barcode.

- **Edit Mask:** The Edit Mask will use 0's or 1's to determine which characters defined by the aforementioned Scope are to be used in [TapeTrack TapeMaster](#). For example, if a Barcode is "BWIX.LTOX.000234L4" using the Edit Mask "000100001000000000" the "X" in character position 4 and character position 9 will be removed so that [TapeTrack TapeMaster](#) receives the Barcode as "BWI.LTO.000234L4".
- **Strip characters:** Similarly, the Strip Characters tool will remove specified characters in the Barcode. For example, if the letter "X" is used in the Strip Characters field, Barcode "BWIX.LTOX.000234L4" will have the "X" characters removed so that the Barcode is received in [TapeTrack TapeMaster](#) as "BWI.LTO.000234L4".

Elements

- **Use substrings:** When set to True for a [Customer-ID](#), [Media-ID](#) or [Volume-ID](#), fields will appear to set "Substring First Character" and "Substring Last Character". These fields are used to set the range of the Barcode that corresponds with the specified Object-ID. For example, in Barcode "BWI.LTO.000234L4" the [Volume-ID](#) begins with character 9 and ends with character 16, so the Substring First Character would be 9 and the Substring Last Character would be 16.
- **Literals:** When "Use Substrings" is set to "false" for a [Customer-ID](#), [Media-ID](#) or [Volume-ID](#), a field will appear that allows for the definition of literals. A "literal," in this context, is a [Customer-ID](#), [Media-ID](#) or [Volume-ID](#) that can be assumed when the above Scope is used.

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

https://docs.tapetrack.com/master/admin_barcode?rev=1576803249

Last update: **2025/01/21 22:07**

