
Deleting Volumes - Older Releases


To delete a Volume `Allow Deletes` must be set to `True` for the repository the relevant Volume is residing in. To enable this right-click on the Repository and select `Properties` or double click the repository.




Under the `Options` tab, set **Allow Deletes** to `True` and Save.

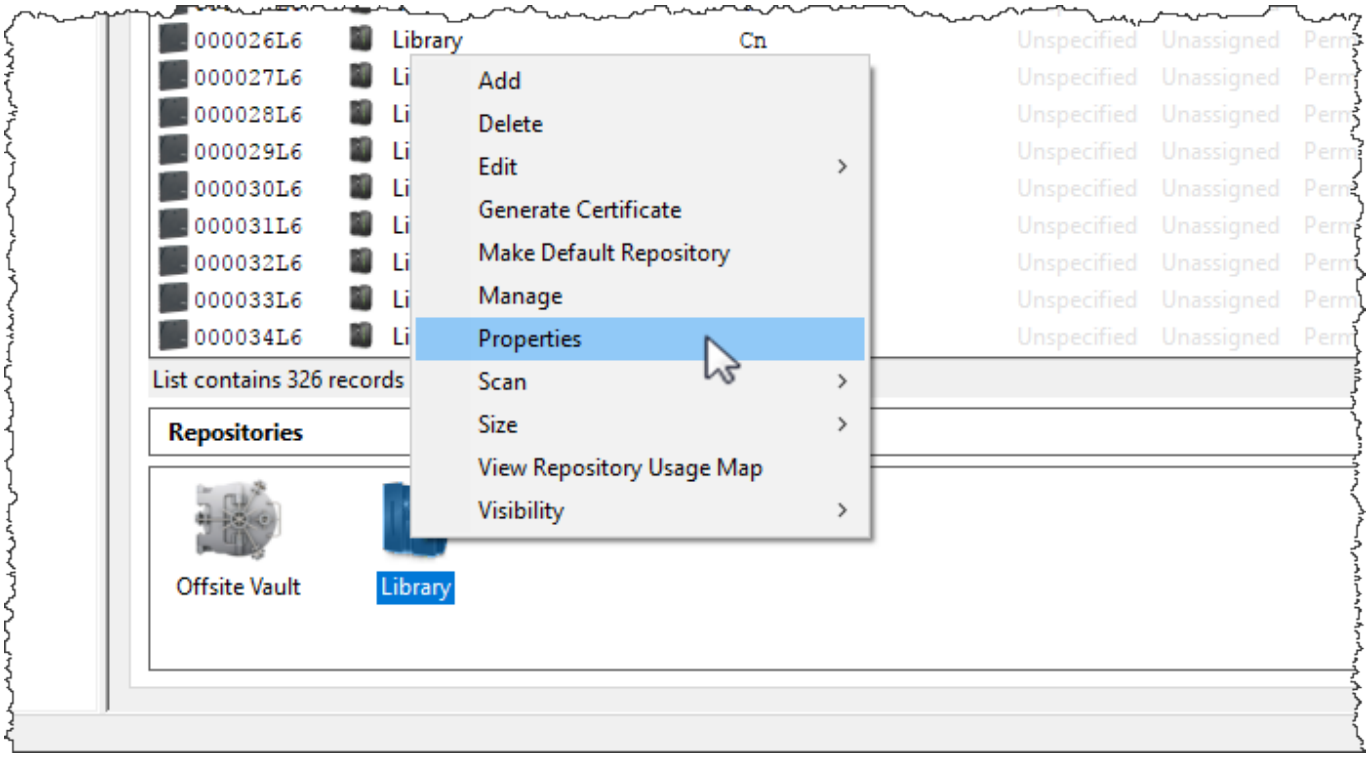

Set **Allow Deletes** back to `False` when finished removing required volumes to stop accidental deletion of any other volumes.

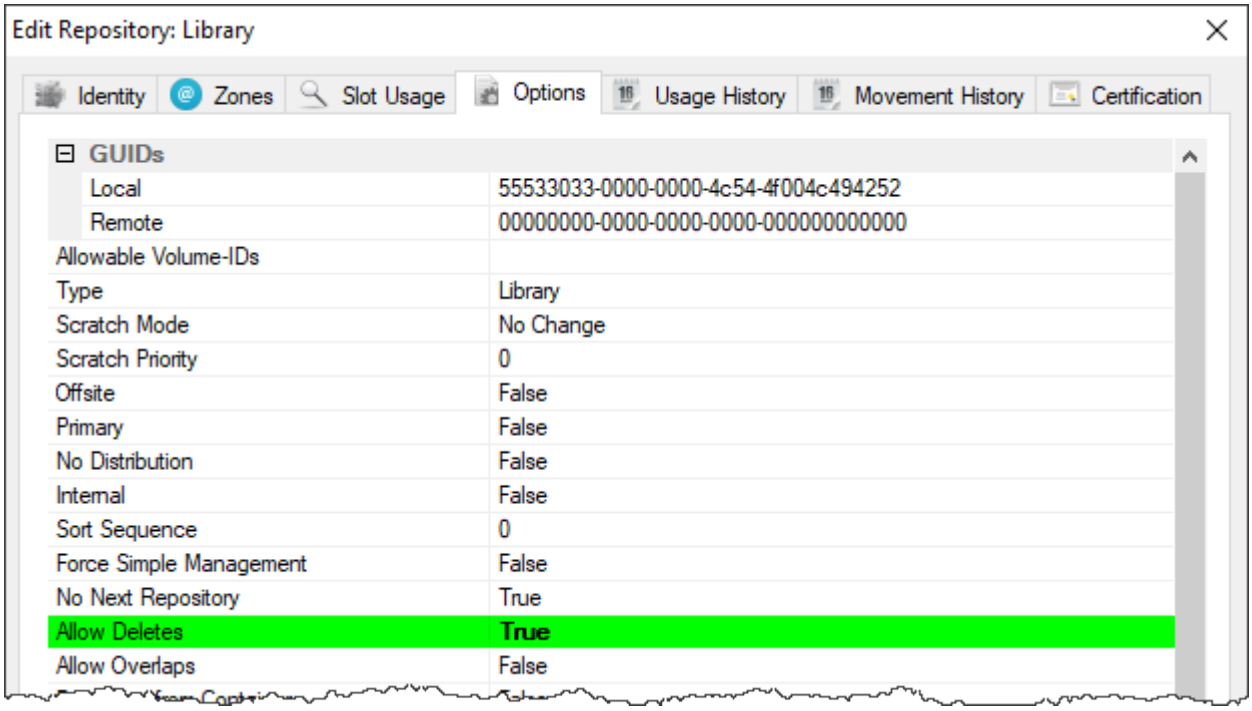

Select a volume, or range of volumes (Shift + click or Ctrl + Click). Right-click highlighted volumes and select `Delete`.

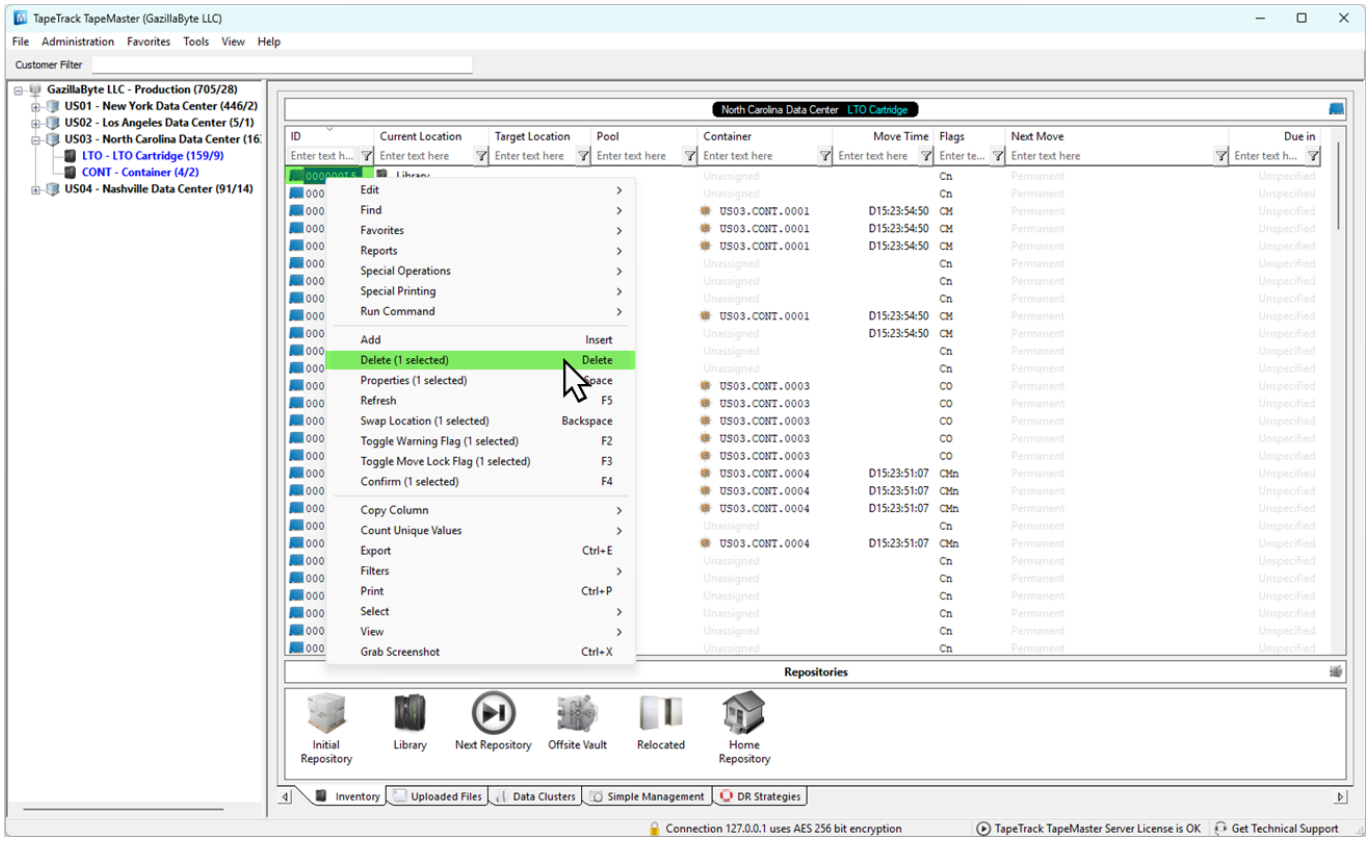

A `Delete Confirmation` window will be displayed.

Select

- `Delete this Item` to delete a volume or range of volumes one at a time.
- `Delete all Items` to delete all volumes.
- `Cancel` to cancel deletion of volumes.

From:
https://rtfm.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://rtfm.tapetrack.com/master/delete_volumes_legacy

Last update: **2025/01/21 22:07**