
Adding and Maintaining Repositories


Repositories are locations where Volumes can be located. This page contains information about Adding and Deleting Repositories.

Adding Repositories

To add a Repository, right-click on the Media Type that the Repository will be listed under and select `Add Repository`.

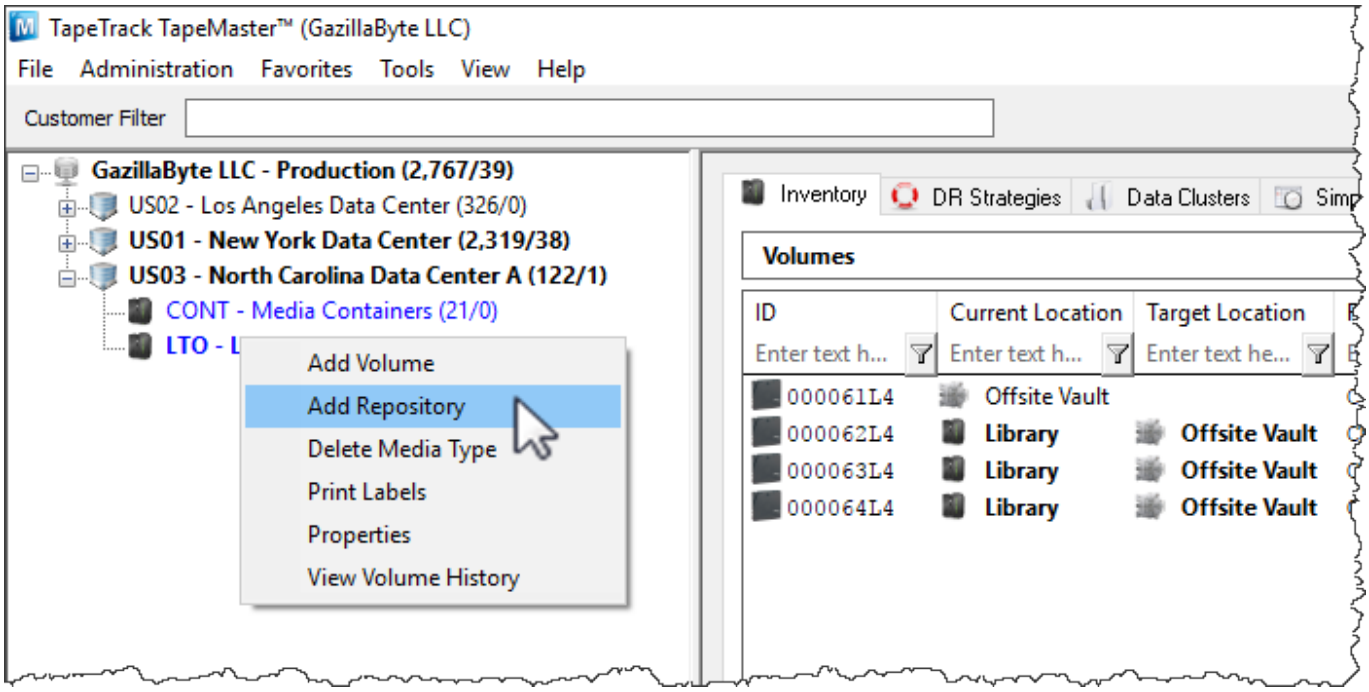

Or right-click in the Repository window and select Add.

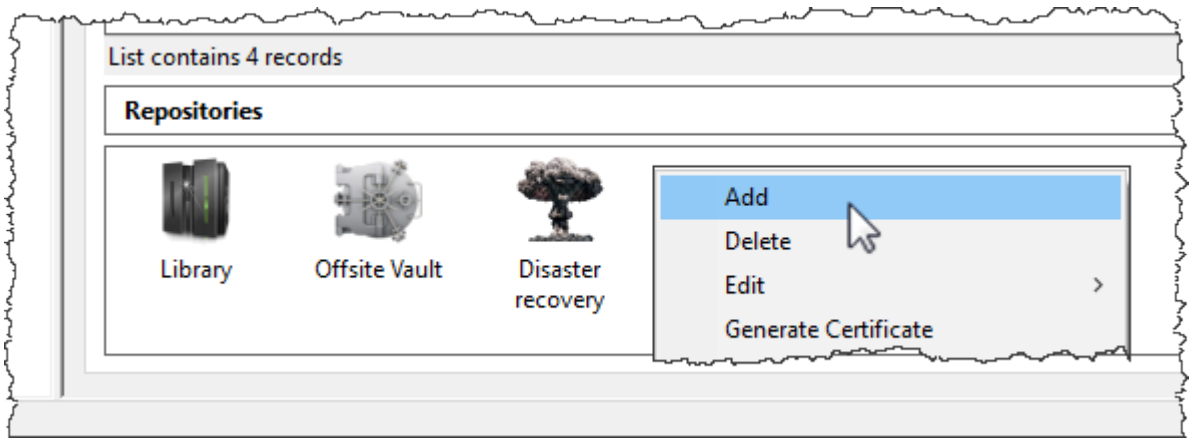


This will launch `Edit New Repository` window.

Basic Repository Options

Identity

Insert the Repository-ID (up to 4 permanent alphanumeric characters) and Repository Description (up to 20 alphanumeric characters)

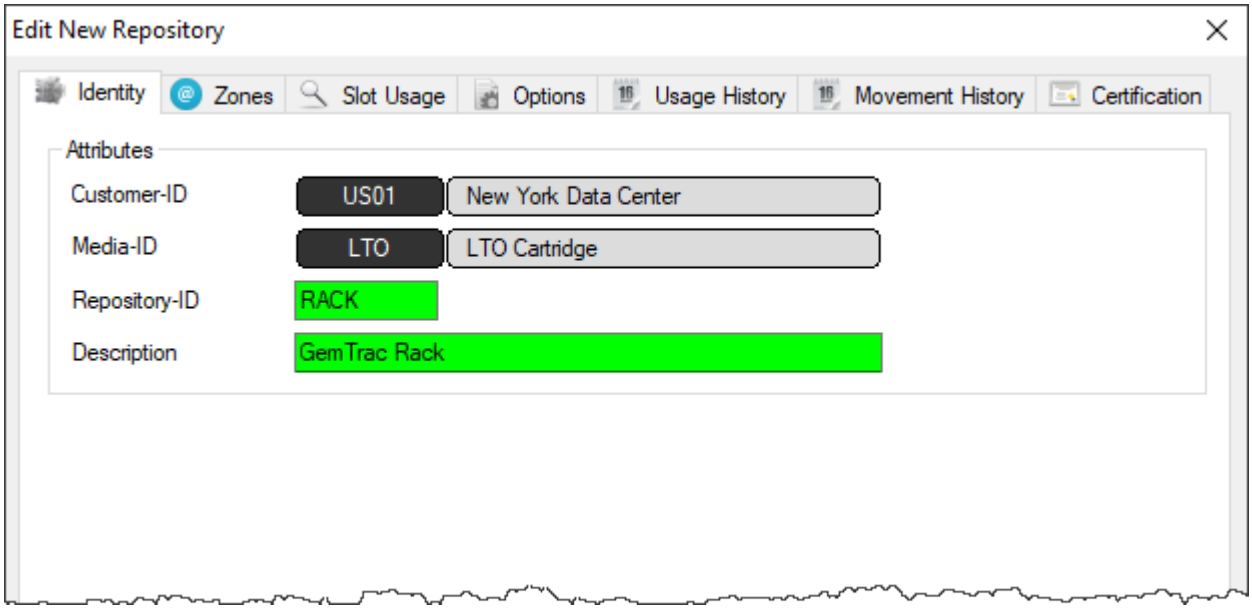

Options

Select type of Repository to change display icon to match repository function. The options are:

- Destruction
- Disaster Recovery
- Legal Hold
- Library
- Ordered
- Rack
- Scratch
- Transport
- Vault

Select the Repository the Volume will move to next (required for all automated tape movement) after this Repository.

Click Save to create Repository.

Advanced Repository Options

Zones
Slot Usage
Options
Usage History
Movement History

Certification


Deleting a Repository

To delete a Repository, right-click on the Repository that needs to be deleted and select `Delete`.




There must not be any Volumes in this Repository in order to delete it.


Any Volumes in a move to the Repository will be placed in a move to the Initial Repository.

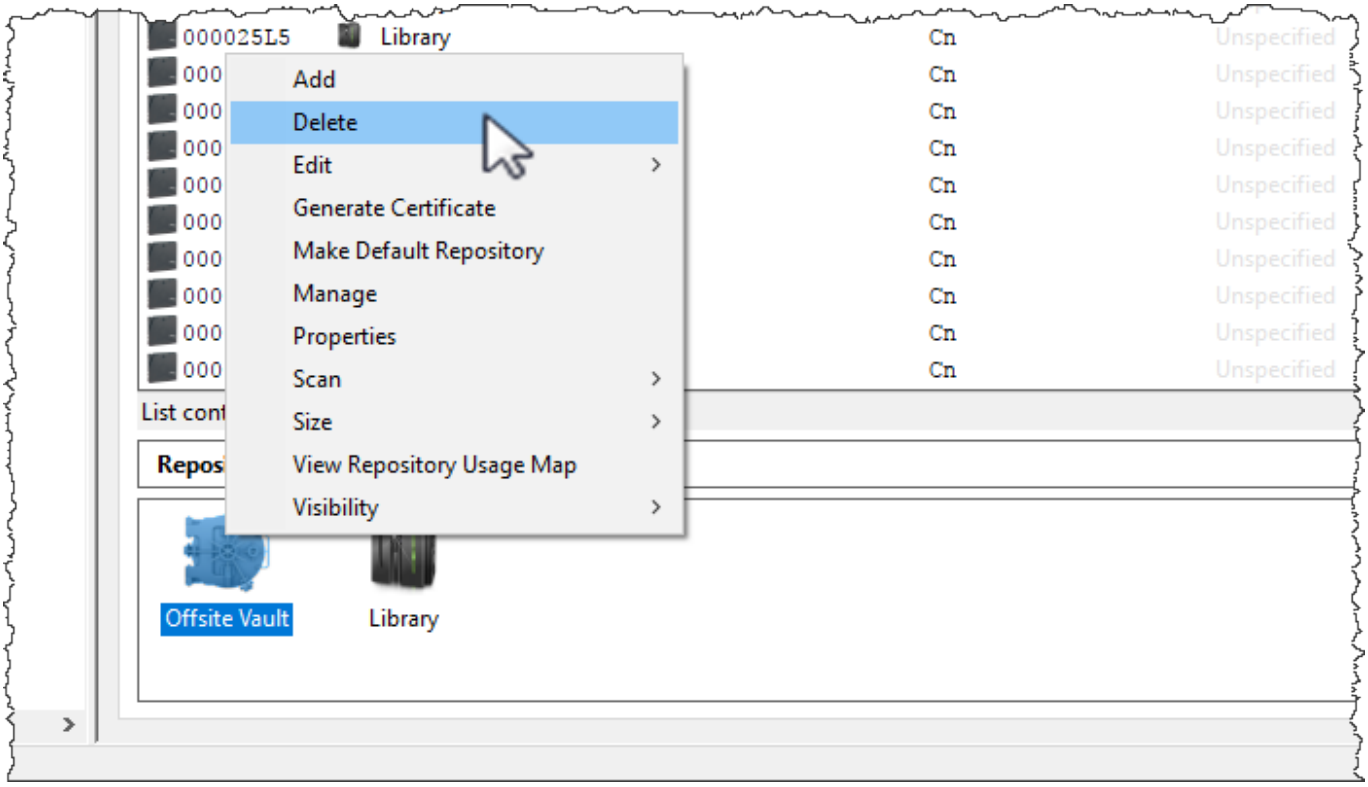

Any Repository set as the default (where volumes are added to when a Target Repository is not specified) cannot be deleted. To remove the default setting, right-click the Media Type in the Customer Tree and select `Properties`.

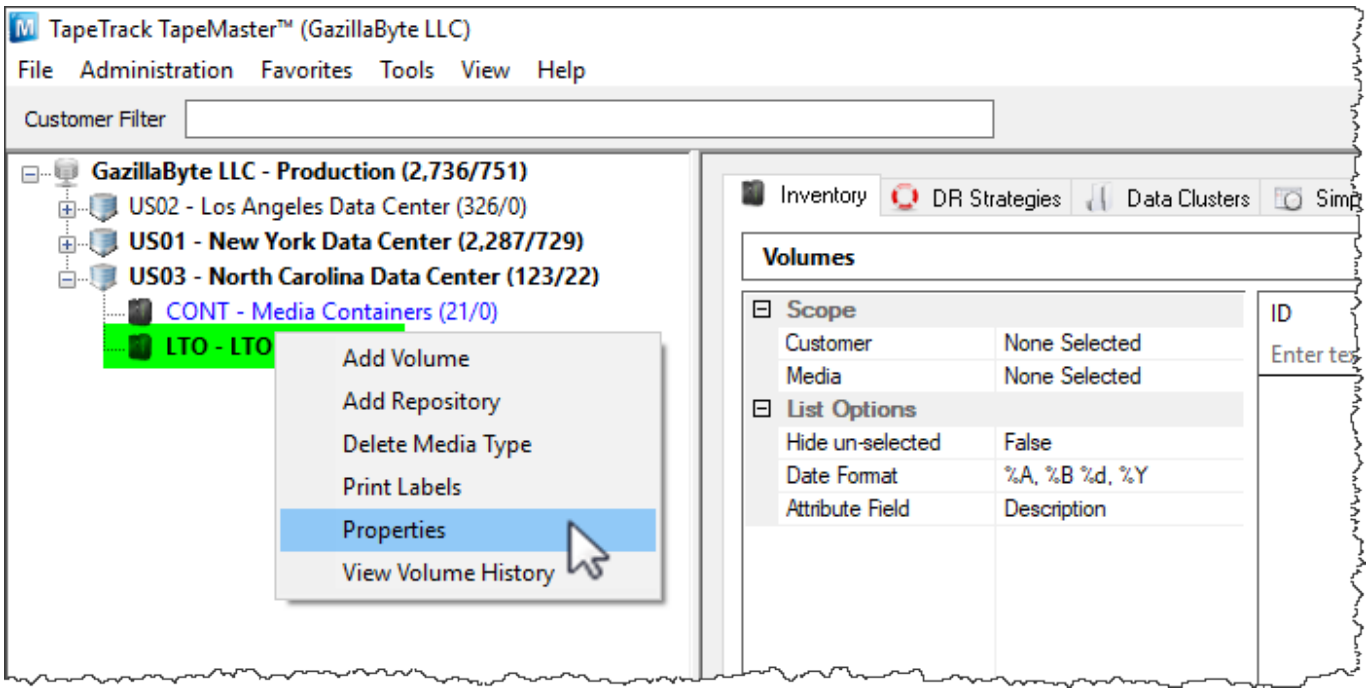

Change the setting **Default Repository** to <No Selection> and click Save.

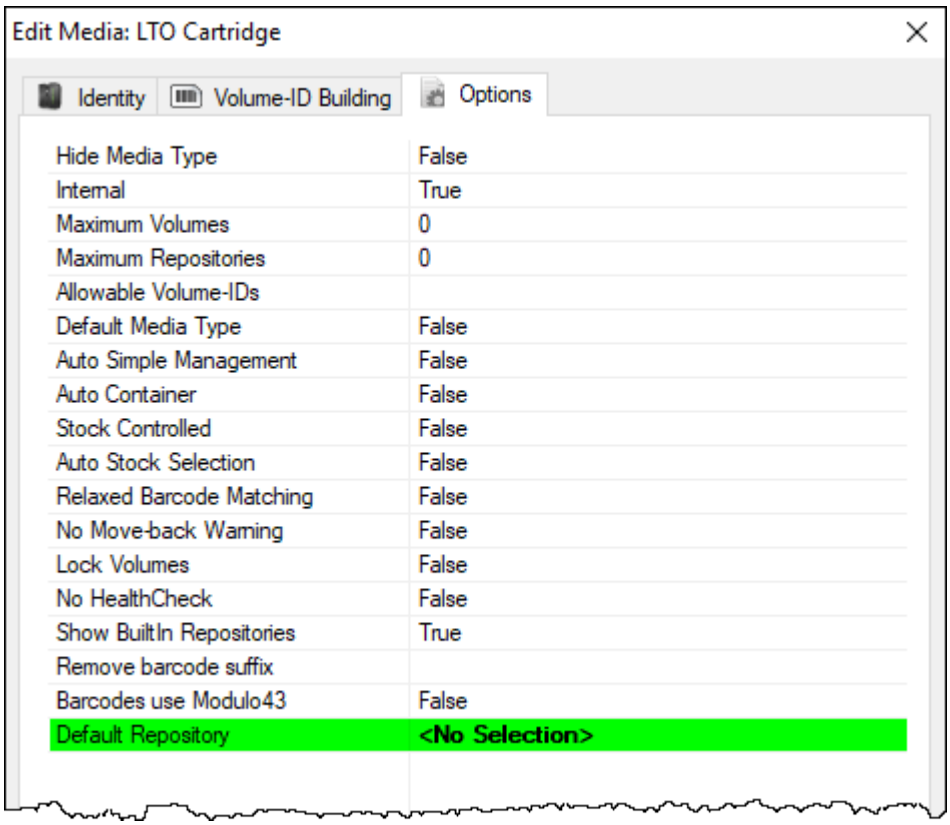

The Repository may now be deleted by right-clicking and selecting Delete and OK to warning dialog.

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/master/repository?rev=1576194995

Last update: **2025/01/21 22:07**