


Adding and Updating User Information

To be able to login to a TapeTrack Framework Server, you must have a [User-ID](#) and password.

This section describes how to add a new User-ID and set attributes for that User-ID.

Group/User Administration

On the Administration drop down menu in TapeTrack TapeMaster select Group/User Administration.

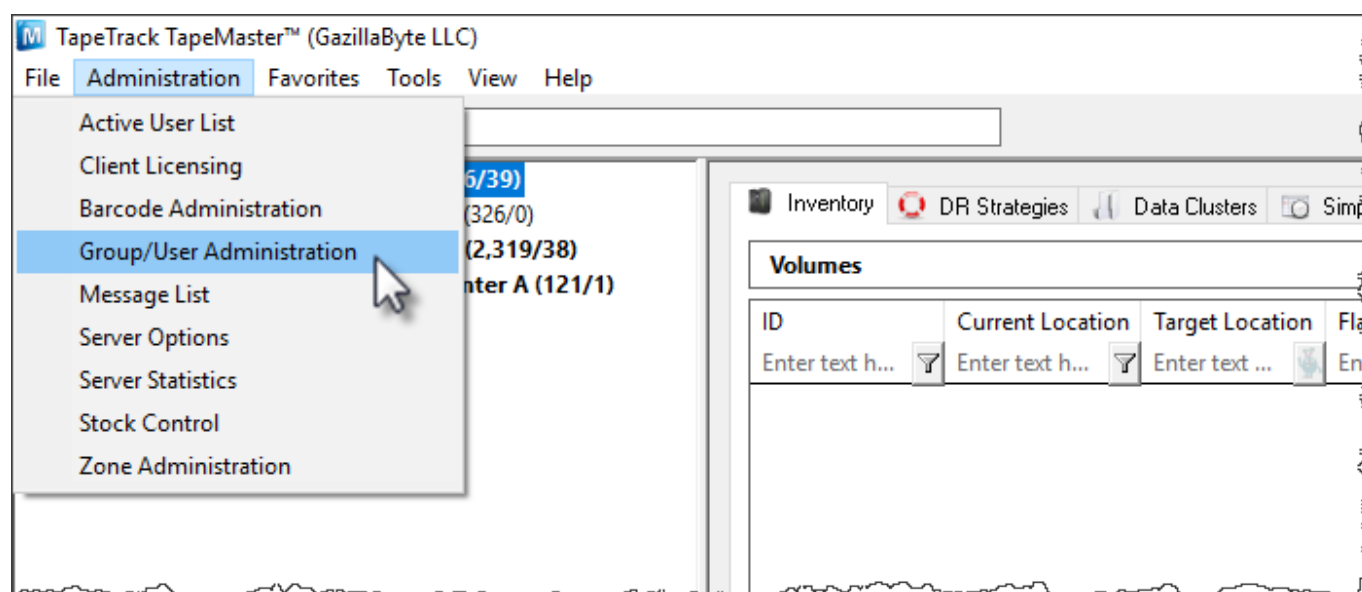

To add a new User, right-click in the white space on the User Administration screen and select Add.



To update an existing User, double-click on that User or right-click and select "Properties". The Add New User window will display six tabs:

- [Identity](#)
- [Group](#)
- [IP Ranges](#)
- [Access](#)
- [Options](#)
- [Defaults](#)

Identity

The Identity tab provides fields to update the User - ID and Name.

- User ID: The User ID will be the user name that the user uses to login to TapeTrack products.
- Name: The name is the User's desired display name.

Add New User

Identity
IP Ranges
Access

Identity

ID

Name

Group

ID

Options

Administrative rights

Scan-In Only

Disabled

No Scanner

No Time-Out

tapemaster rights

Allow access inheritance

Certify

AD Domain

Require AD Group

Client Access

TapeMaster

Lite

Checkpoint

Sync

Details

Email Address

Description

Defaults

Customer-ID

False

False

False

False

False

False

False

False

False

False

True

True

False

True

<No Selection>

Save

Cancel

Help

Group

The Group tab is where a User is added to a group depending on their role and access required.

- Group: Associates the selected User with a Group.
- Role: Sets the Role for the User.



The 'Add New User' dialog box is shown with the 'Group' tab selected. It features a 'Group' dropdown menu with 'TapeLib' selected and a 'Role' dropdown menu with '0:Administrator' selected. An 'Add New Group' button is located below the dropdowns.

Select group to assign user to from the drop down list or [add new group](#).

IP Ranges

The IP Ranges tab sets restrictions on which IP addresses a User can access the TapeTrack Server from. To add or delete, right-click the window. Global Access (0.0.0.0) will allow access from any IP.



The 'Add New User' dialog box is shown with the 'IP Ranges' tab selected. It displays a table with columns 'Seq.', 'IP', and 'Mask'. The first row shows '1' in the 'Seq.' column and '0.0.0.0' in the 'IP' column. A right-click context menu is open over the table, showing options: 'Add IP', 'Add Global Access IP', and 'Delete IP'. A mouse cursor is pointing at the 'Add IP' option.

Seq.	IP	Mask
1	0.0.0.0	

Access

The Access tab sets permissions for which Customers the selected User can access and how that

User can interact with Volumes in the selected Customer.

Add New User

Identity IP Ranges Access

Customer-ID **US***

Access	
Read	True
Write	True
Alter	True
Catalog	True

Add

Access Prediction

Customer	Description	Access
US01		Read Write Alter Catalog
US02		Read Write Alter Catalog

Total Items 2

Save Cancel Help

- Customer ID: Enter the Customer-ID for the Customer that the User should have access to.
 - US01 will give access to US01 only
 - US* will give access to all customers starting with US
 - * will give access to all customers
- Read: Allows the User to view but not update Volumes in the above Customer. Must be enabled for the User to be able to view Volumes in the selected Customer ID.
- Write: Allows the User to perform basic operations for Volumes in a Customer.
- Alter: Allows the User to Add and Delete Volumes to the selected Customer.

Click Add and then Save.

Options

The Options tab has 3 sections to provide access to additional features of the software.

Add New User

Identity

Group

IP Ranges

Access

Options

Defaults

Options

Administrative rights	True
Scan-In Only	False
Disabled	False
No Scanner	False
No Time-Out	False
tapemaster rights	True
Certify	True
AD Domain	your.tapetrack.domain
Require AD Group	True

Client Access

TapeMaster	True
Lite	True
Checkpoint	False
Sync	True

Details

Email Address	
Description	

Options

In the Options section is where you can select True or False to give that User access to that feature.

- Administration Rights: When set to True the User will have Administration Rights with Server Administrator privileges or the ability to Add or Delete Customers and Add or Delete Media Types.
- Scan-In Only: When set to True the User will only be able to Scan tapes into the system.
- Disabled: When set to True the User's access will be in a disabled status, so that they are not able to access any TapeTrack products. This does not delete the User.
- No Scanner: When set to True the Barcode Scanning Window will provide an auto-complete

drop-down.

- No Time-Out: By default, all User's are logged out of TapeMaster after ten minutes of inactivity. Setting this to True, the selected User will not time out.
- tapemaster rights: When set to True, it allows the User to gain the same administrative rights as the tapemaster superuser account.
- AD Domain: This is required if the User logs on to TapeTrack with their Active Directory Username and Password.
- Require AD Group: When set to True, the User must use their [Active Directory](#) credentials.

Client Access

- When any of the Client Access are set to True, it allows the User to have access to the TapeTrack software that is selected.


Default settings give access to TapeMaster, Lite and Sync.

Details

- Allows inclusion of user email

Defaults

The Defaults tab sets a User's default [Customer](#) and [Media Type](#) for Barcode scanning. These defaults can be changed in the [Barcode Scanning Window](#) at any point.

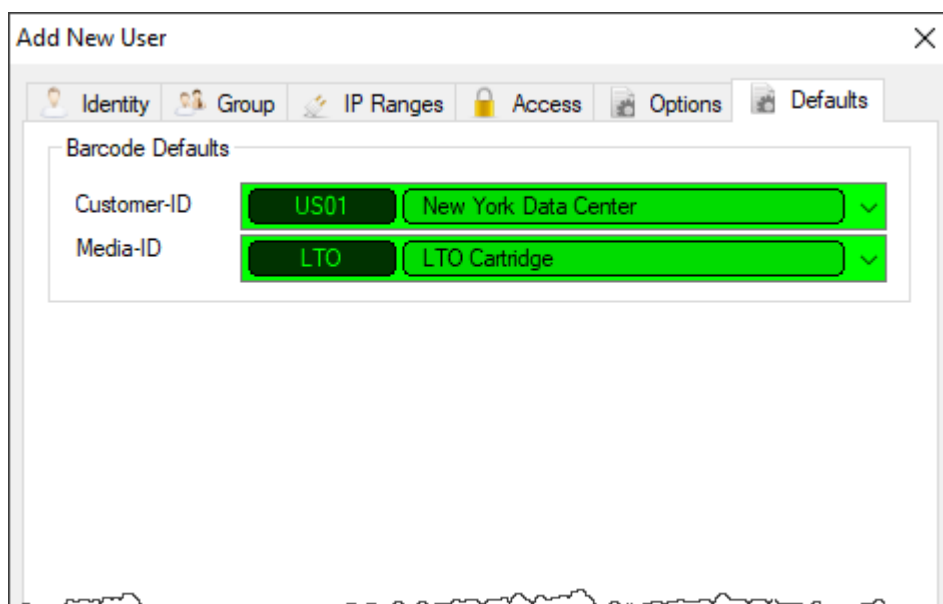

The screenshot shows the 'Add New User' dialog box with the 'Defaults' tab selected. The 'Barcode Defaults' section contains two rows of dropdown menus. The first row is for 'Customer-ID', with 'US01' selected for the first dropdown and 'New York Data Center' for the second. The second row is for 'Media-ID', with 'LTO' selected for the first dropdown and 'LTO Cartridge' for the second. All dropdown menus have a green background and a small downward arrow on the right.

Label	Value 1	Value 2
Customer-ID	US01	New York Data Center
Media-ID	LTO	LTO Cartridge

Once all information is correct and complete click Save to create new user.

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://docs.tapetrack.com/master/user?rev=1507115238>

Last update: **2025/01/21 22:07**

