


Adding and Maintaining Volumes


Adding Individual Volumes

To add a Volume either:


- Right-click on a [Media Type](#) and select Add Volume.

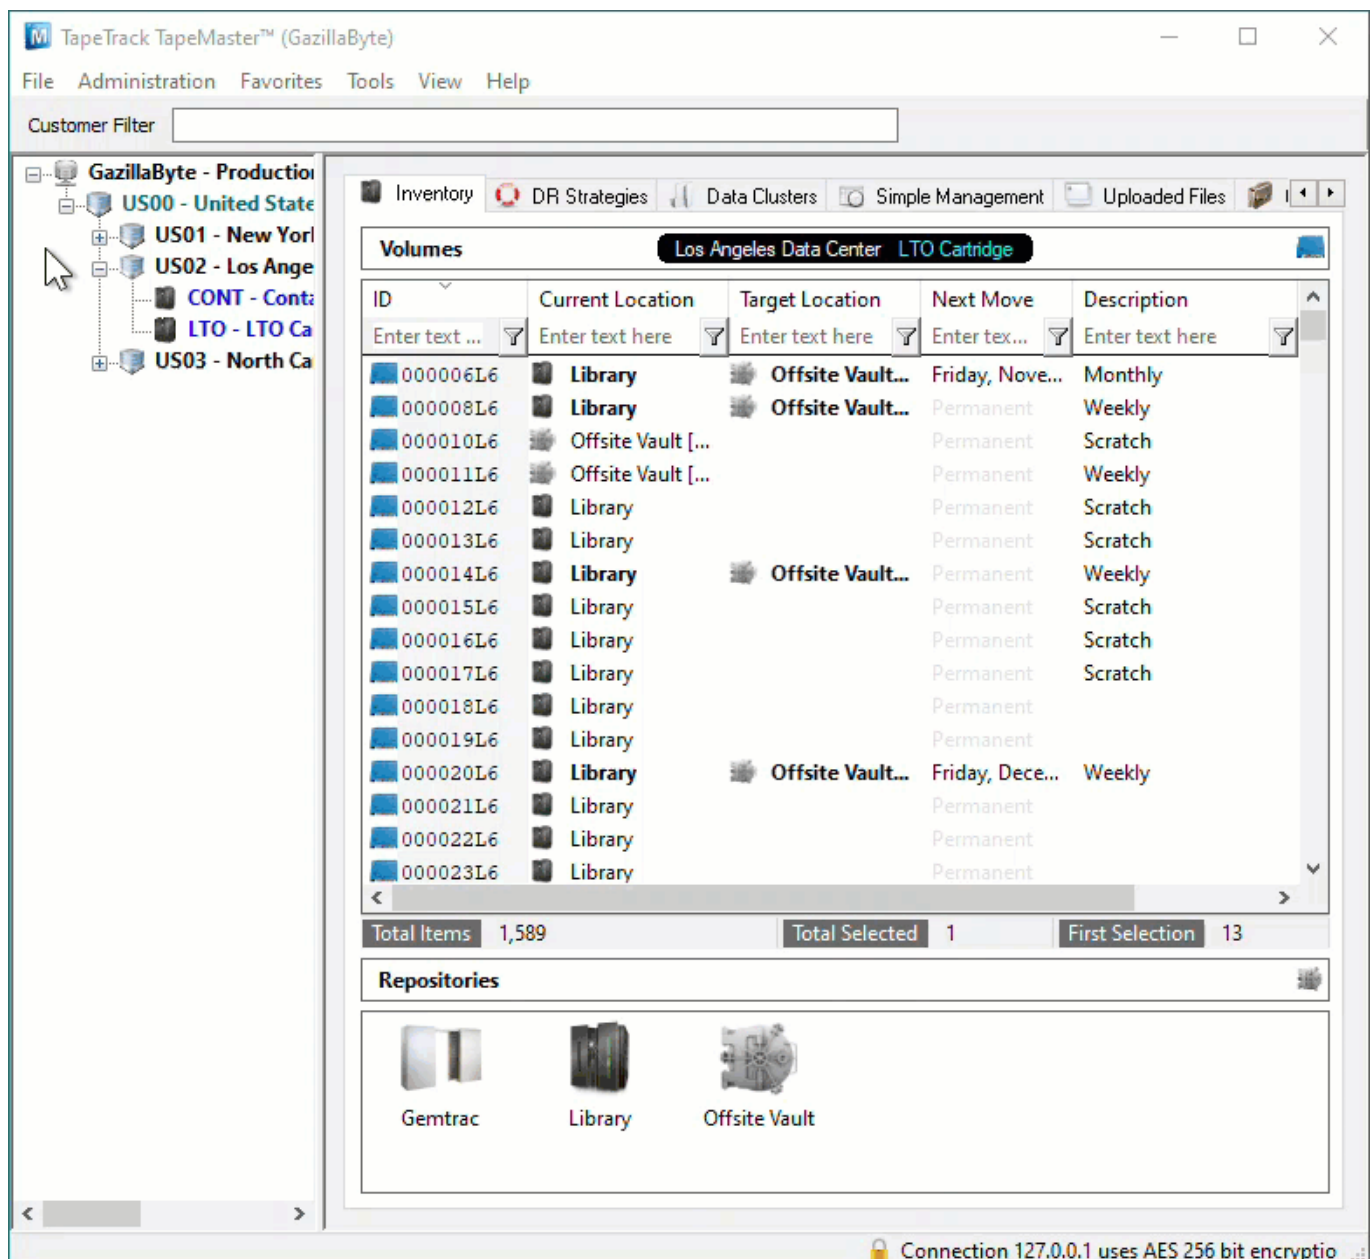

- Right-click in the inventory window and select Add.

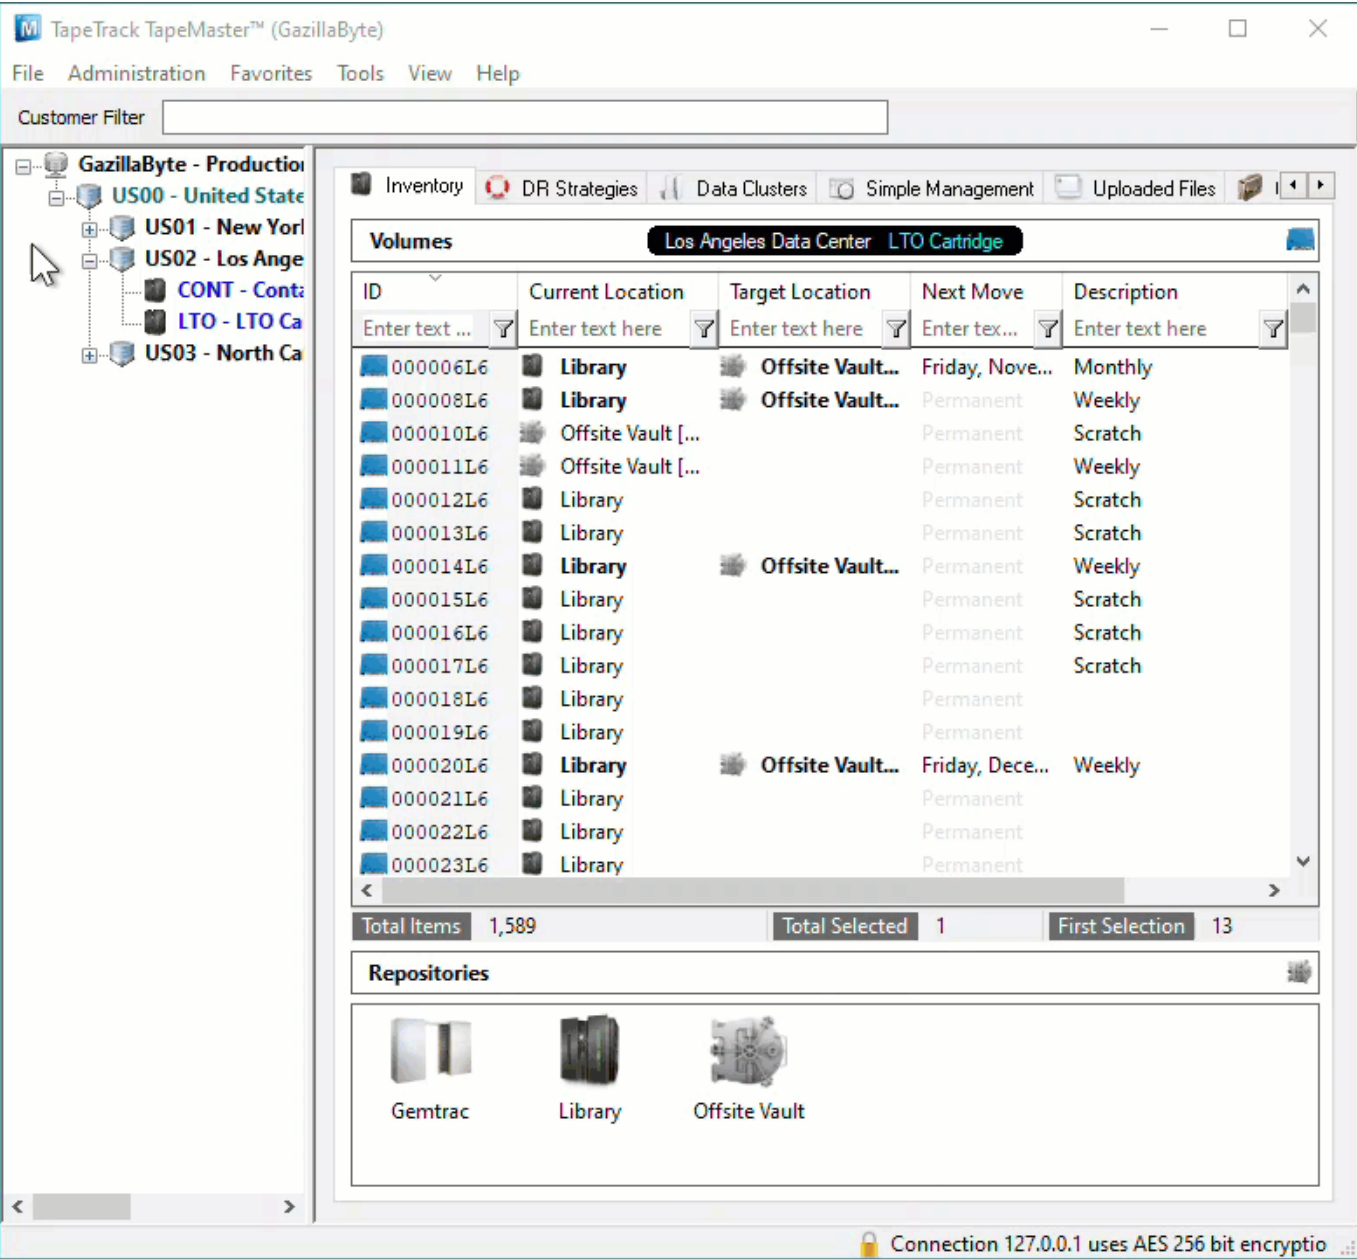

- Click in the Inventory window and press Insert on the keyboard

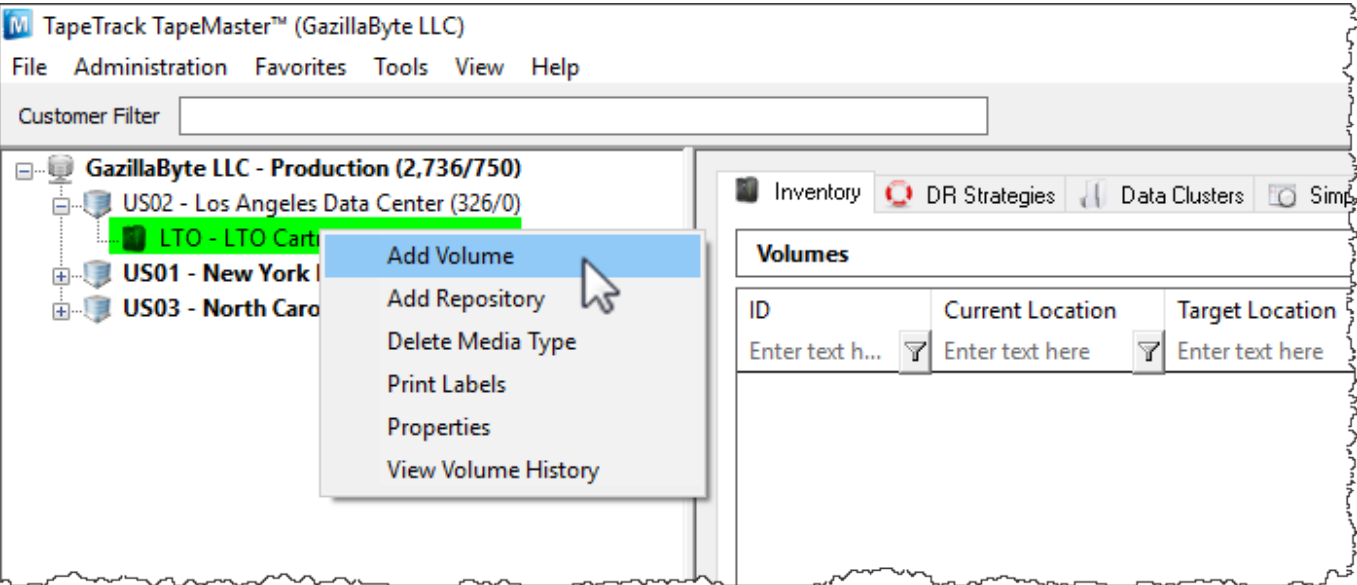

In the Edit new volume window enter the Volume-ID of the new volume to be added and click Save.


Volume Attributes

Customer-ID	US02	Los Angeles Data Center
Media-ID	LTO	LTO Cartridge
Volume-ID	000123L6	


000123L6

Scan to Add Volumes

Right-Click in the Volume List, navigate to Special Operations, and select Scan → Scan to Add Volumes to use a Barcode scanner to add Volumes to your default repository.

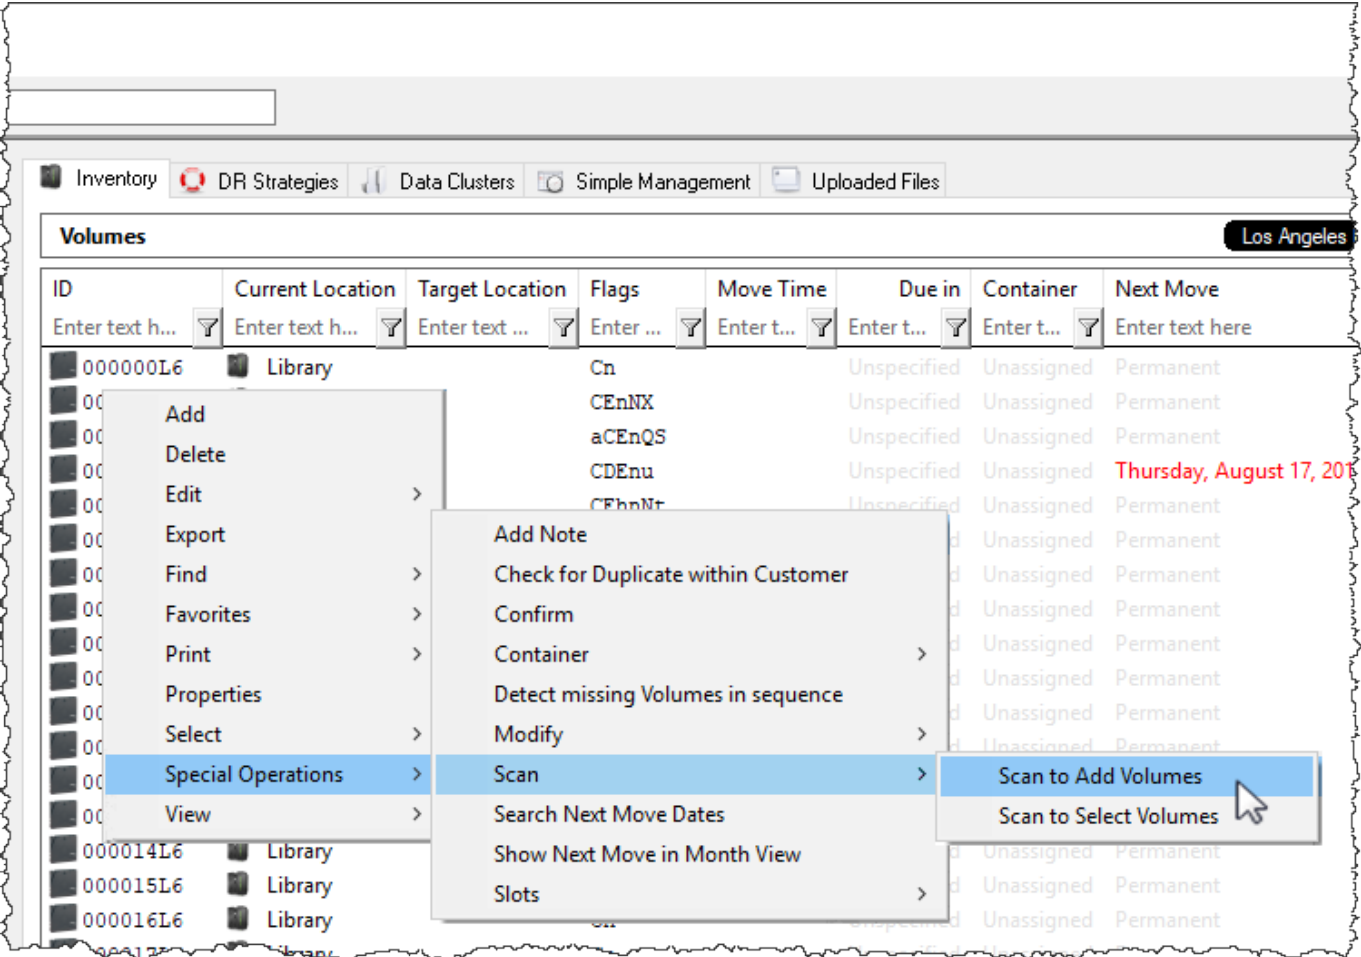

To add volumes to a repository other than your default, right-click the required repository and select Scan → To Add and scan volumes to be added.

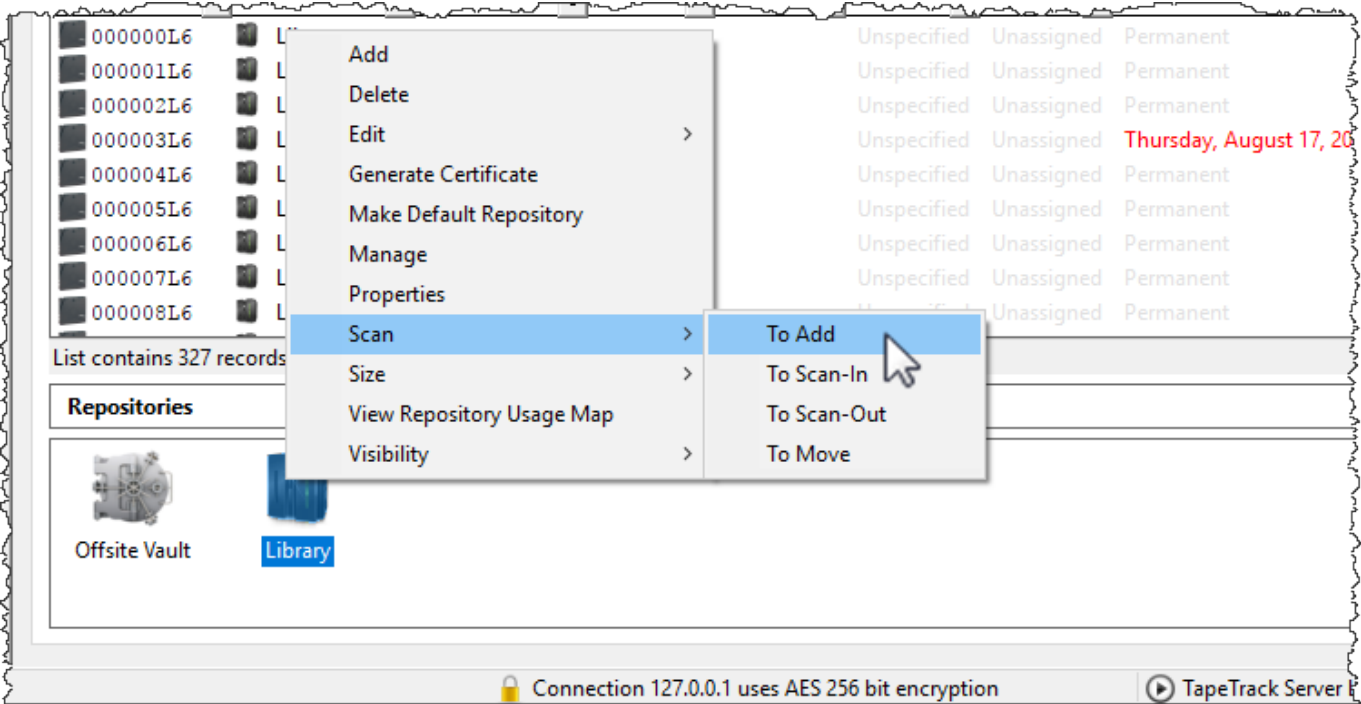


Deleting Volumes



You must have **Alter** rights to delete volumes

Select the required volume, or range of volumes from the inventory window you want to delete.


Right-click highlighted volume/s and select **Delete**, or press Delete (DEL) on the keyboard.

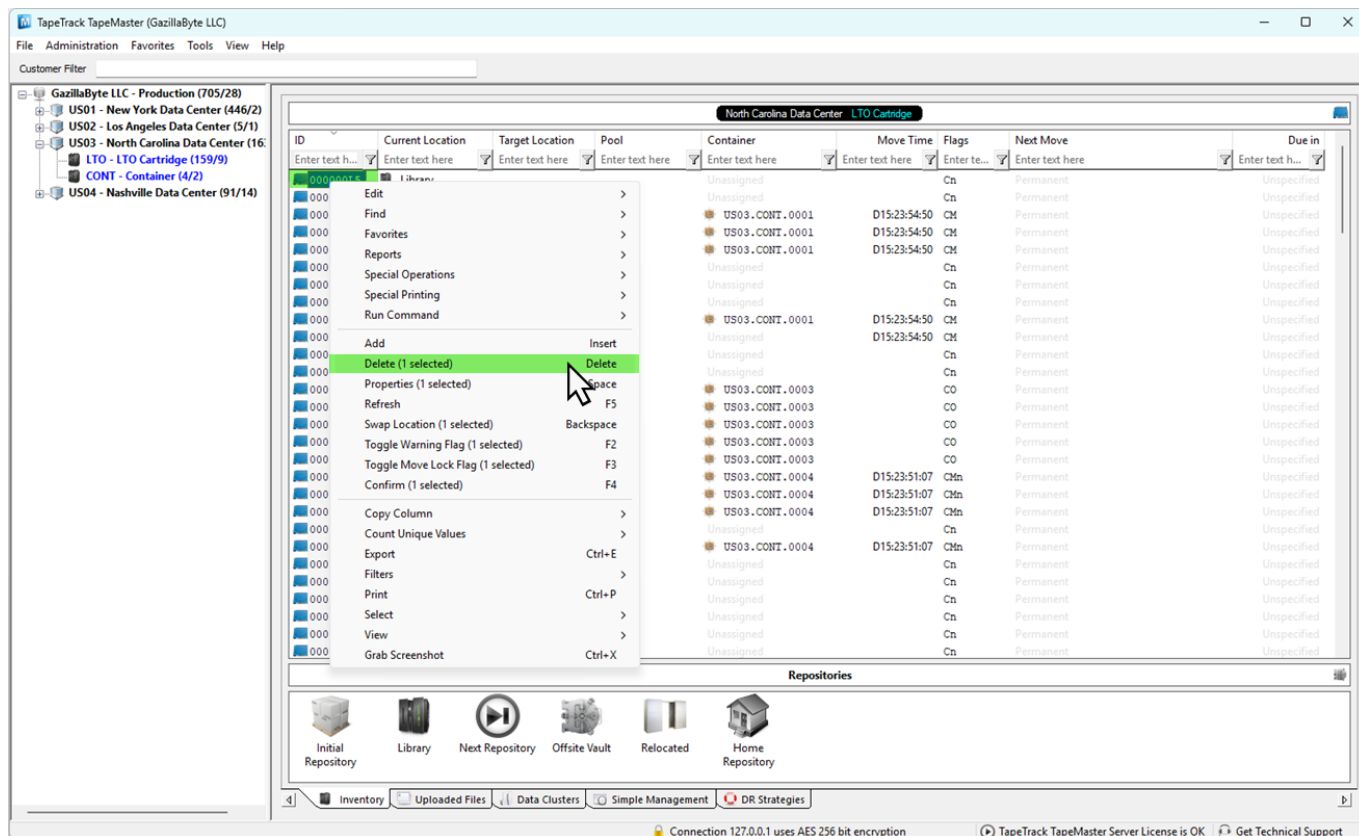

The **Volume Deletion** window will display the **Repositories** where the volumes to be deleted are located in the top pane and Volume-ID's in the lower pane.




If the **Volume Deletion** window is not displayed it is because you are running an outdated version of TapeMaster. Instructions to delete volumes in older versions of TapeMaster can be found [here](#)

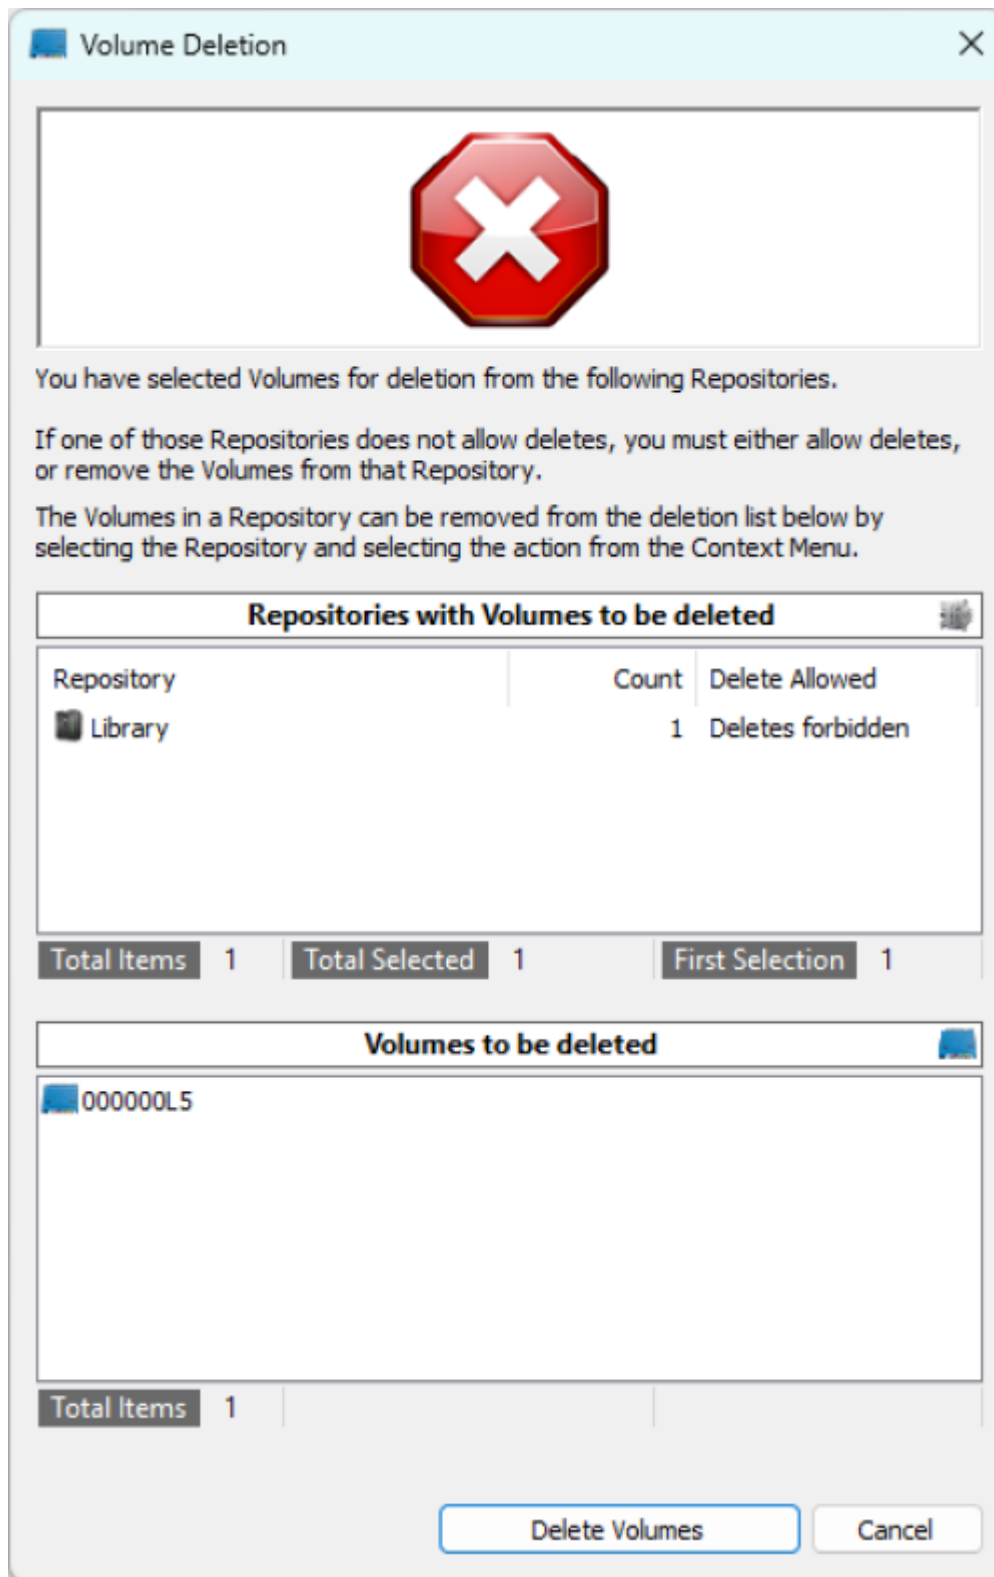


Each row in the top pane will, along with the repository description (or ID), list the number of volumes for deletion and the delete status of either **Deletes Allowed** or **Deletes Forbidden**.

For any repository listed with a status of **Deletes Forbidden** you must either:

- Right-clicking the row and selecting Allow to change status to **Deletes Allowed**
- Right-clicking the row and selecting Remove to remove the volumes before deletion of any volumes located in a repository with **Deletes Allowed** status.

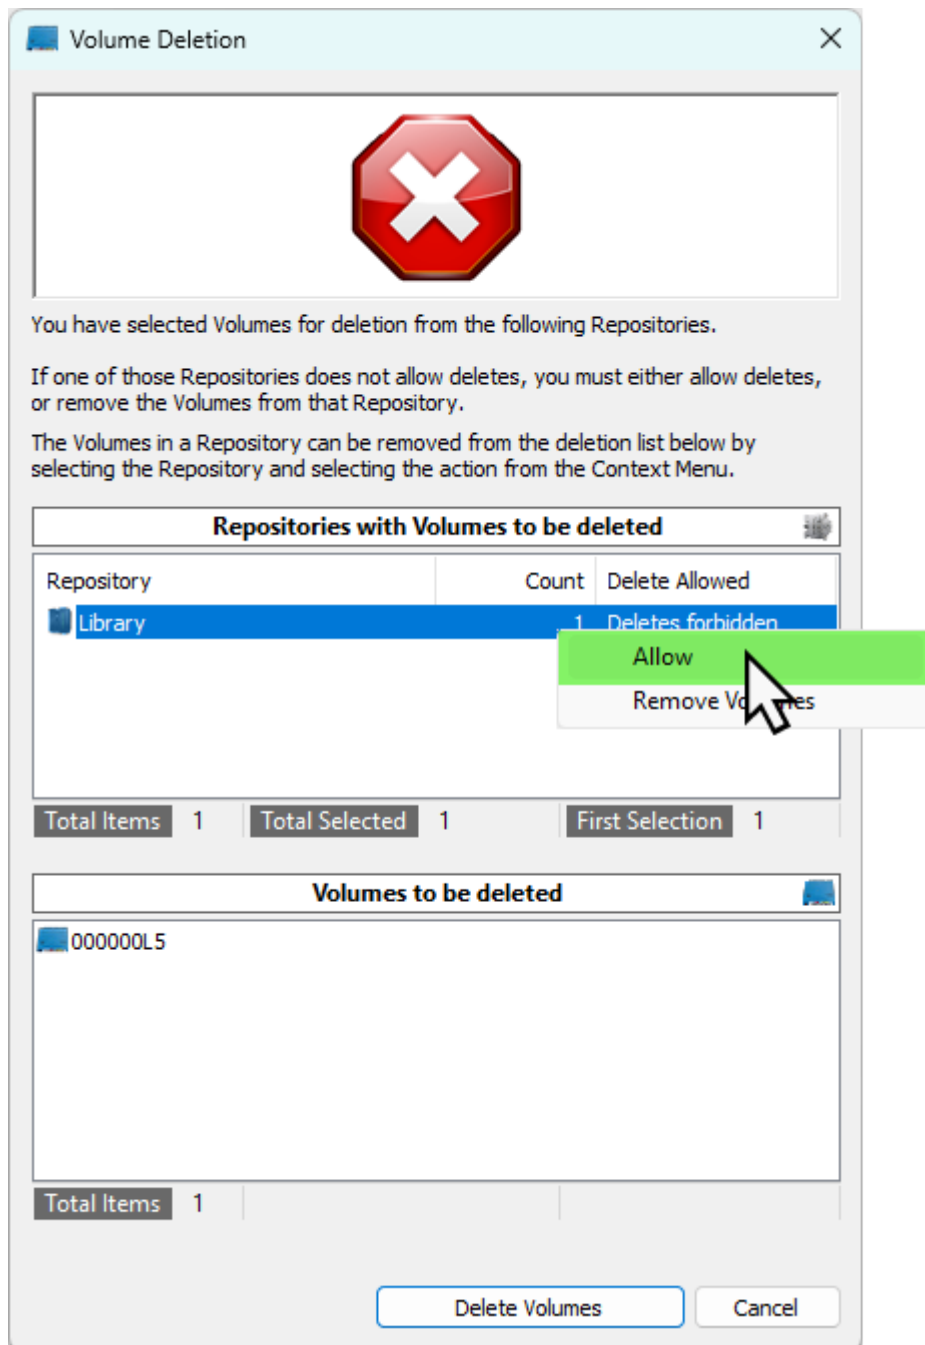


Click **Delete Volumes** and **Yes** to the delete confirmation to delete the volumes.

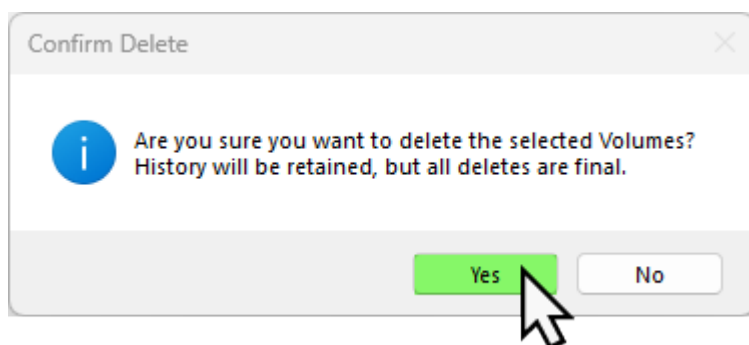


As deleting volumes is permanent, clicking **No** to the delete confirmation is your last opportunity to cancel the delete function.

When a volume is deleted its historical entries remain in the database. If a deleted Volume is added

back into the database, all previous history records including when deleted and added back, are listed under that volumes History tab.

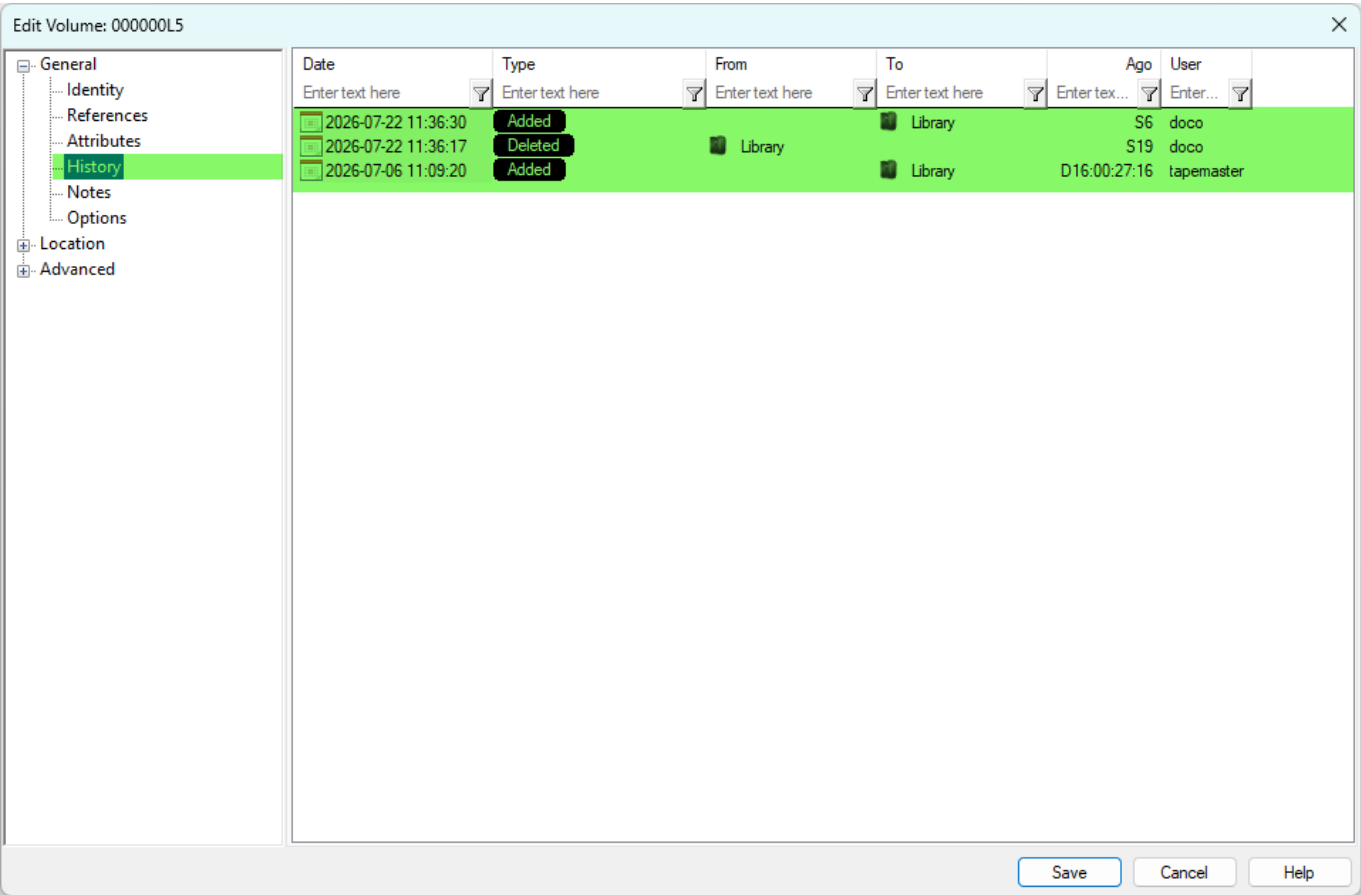

As setting repository to **Allow Deletes** alters the properties of that repository, if required, reset the repository to **no deletes** by right-clicking the required repository, selecting Properties and change the Allow Deletes field in the Options tab to false.

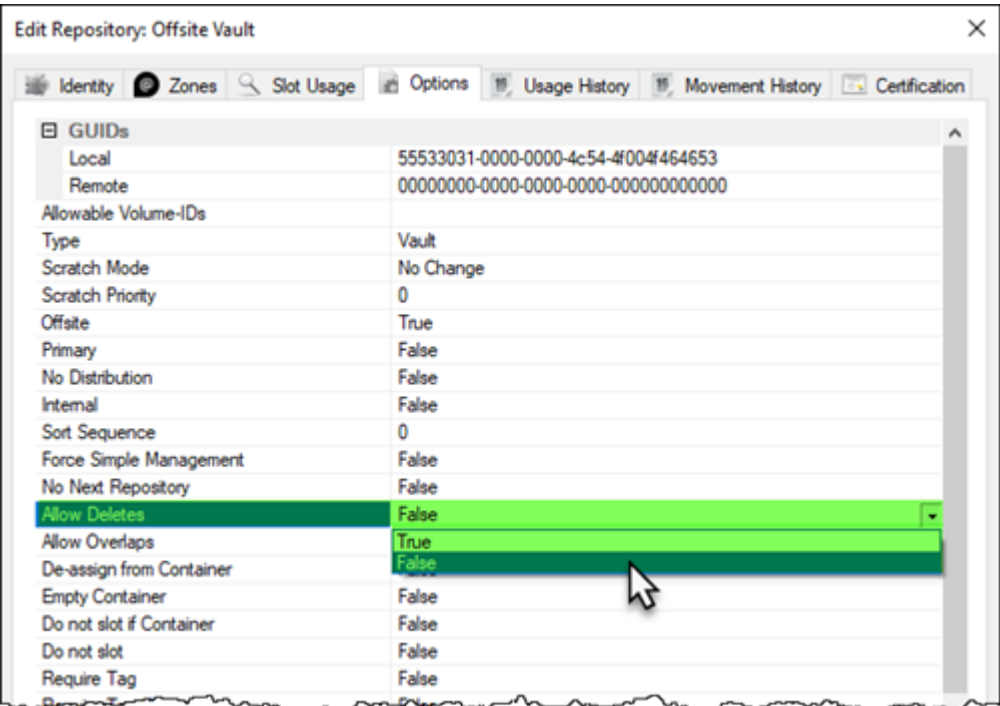

See [Special Operations Menu](#) for further information.

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://docs.tapetrack.com/master/volumes?rev=1627950249>

Last update: **2025/01/21 22:07**

