Repository

A Repository represents the general location of a Volume.

Repository-ID


A repository ID is a string of up to four alphanumeric characters. This ID must be unique within the repositories assigned to the media type.

Dependencies


- Media Type (parent)

Creating a Repository

To add a Repository, right-click on the Media Type that the Repository will be listed under and select `Add Repository`.

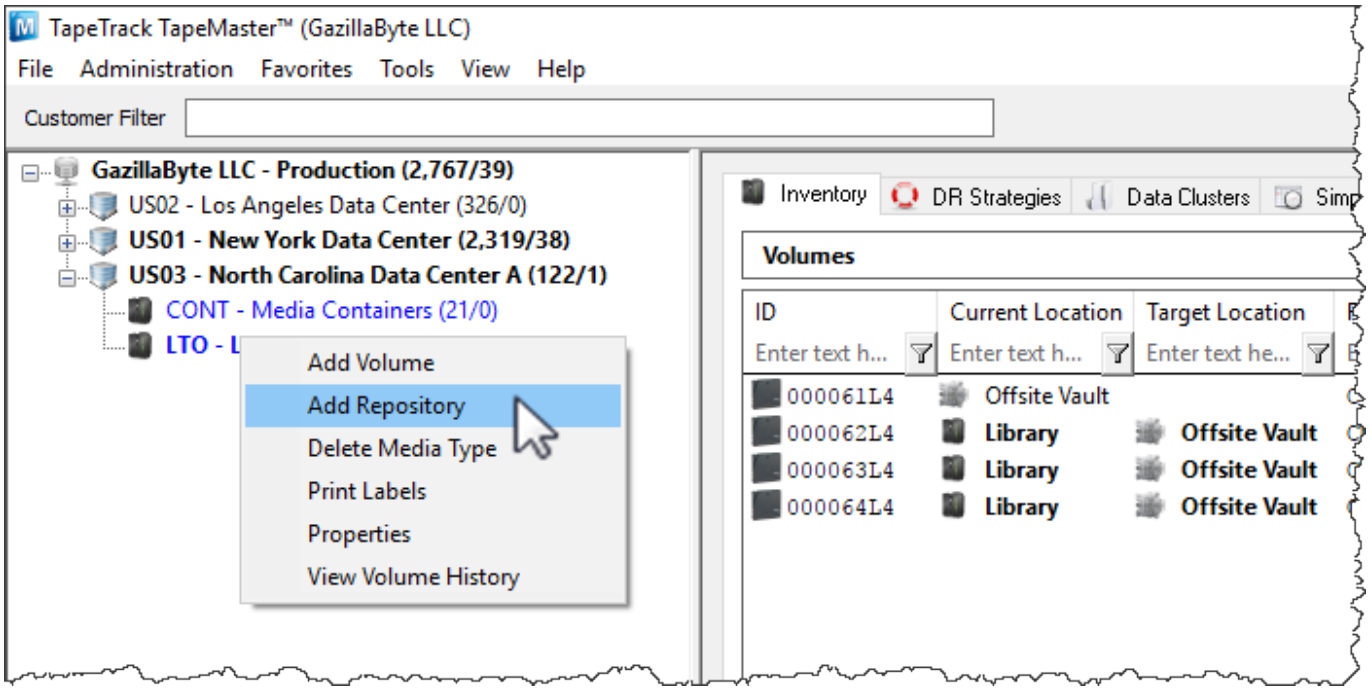

Or right-click in the **Repositories** window and select Add.

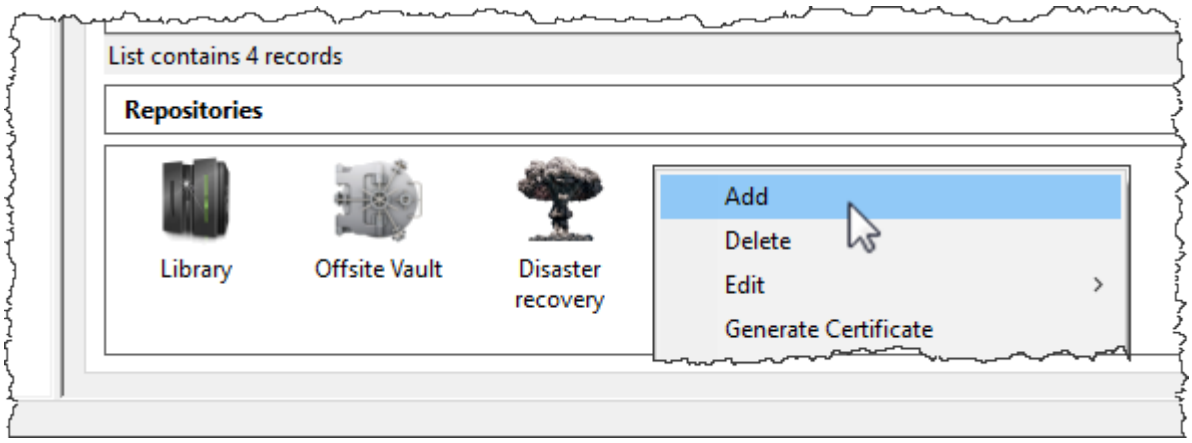


This will launch `Edit New Repository` window.

Basic Repository Options

Identity

Insert the Repository ID (up to 4 permanent alphanumeric characters) and repository description (up to 20 alphanumeric characters)

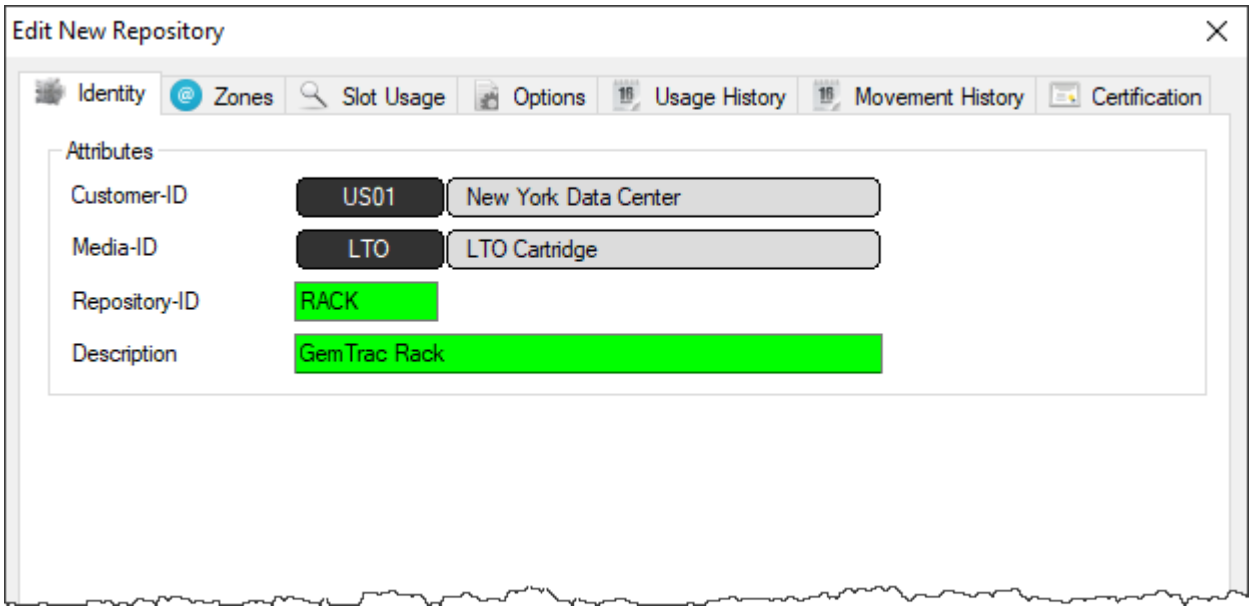

Options

Select `type` of repository to change display icon to match repository function:

- Destruction
- Disaster Recovery
- Legal Hold
- Library
- Ordered
- Rack
- Scratch

- Transport
- Vault

Select the repository the volume will move to next (required for all automated tape movement) after this repository.

Click Save to create repository.


Advanced Repository Options

Zones
Slot Usage
Options
Usage History
Movement History

Deleting a Repository

To delete a Repository, right-click on the Repository that needs to be deleted and select `Delete`.

There must not be any Volumes in this Repository in order to delete it.

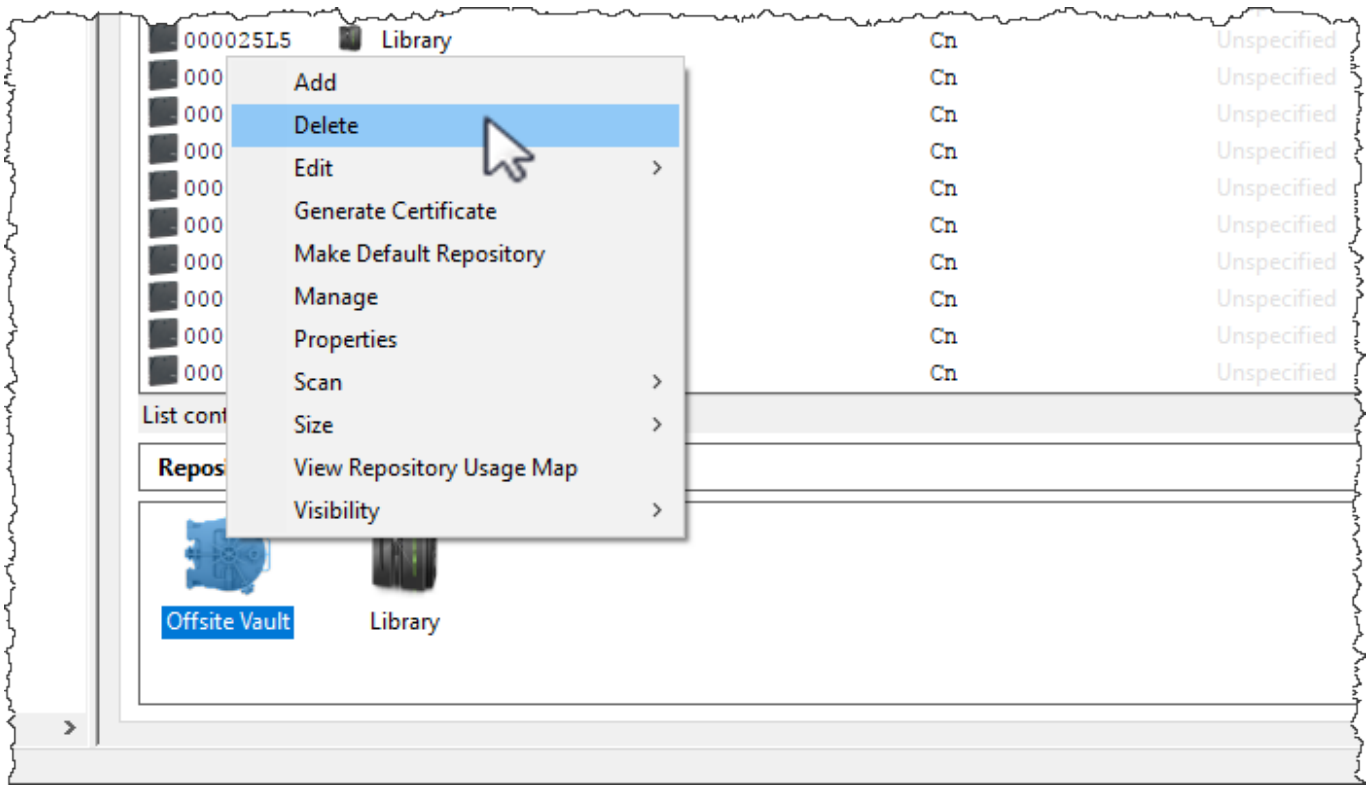

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/object/repository?rev=1530068969

Last update: **2025/01/21 22:07**