


De-Assign From Container

The [Repository](#) Option De-Assign From Container removes the [Volume](#) from its' assigned Container on Confirmation into this [Repository](#).

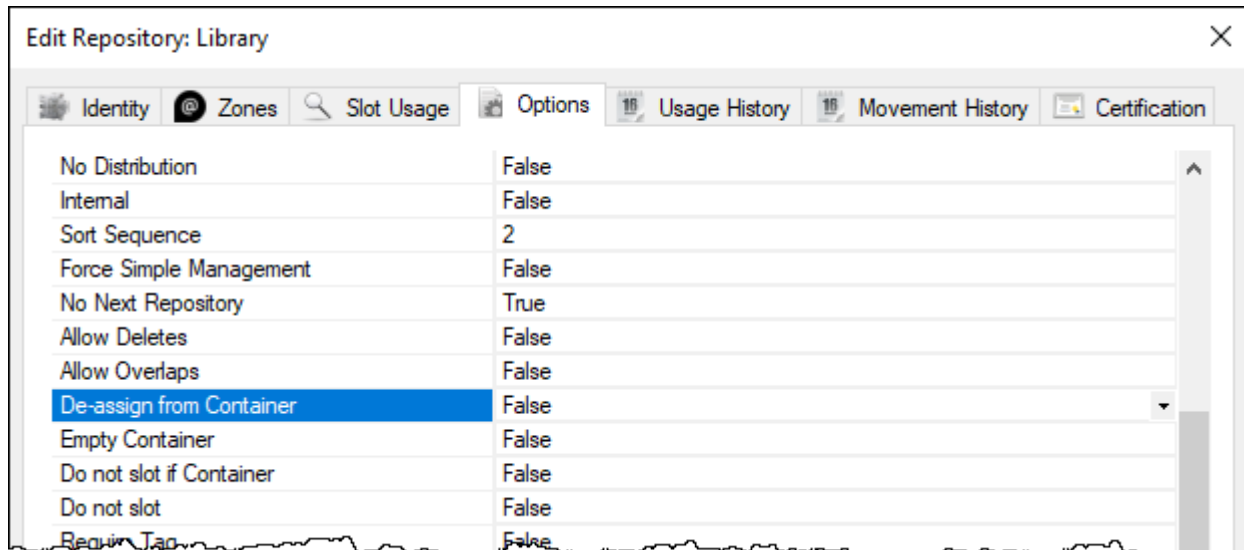

De-Assign From Container Options

- True: Removes [Volume](#) from its' assigned Container.
- False: Does not remove [Volume](#) from its' assigned Container.

De-Assign From Container automatically removes a volume from its container when the volume is confirmed into the repository.

Example:

- Tape 000123L8 is assigned to container BOX001.
- The tape is moved to repository LIBR.
- LIBR has De-Assign From Container = True.
- When the tape is confirmed at LIBR, its assignment to BOX001 is removed.

Setting	When the volume is confirmed
False	The volume remains assigned to its container
True	The volume is removed from its container

Important distinctions:

- It takes effect when the volume is confirmed, not merely placed into a move.
- It de-assigns the confirmed volume; it does not automatically empty every other tape from that container.
- It does not delete the container.
- It does not move the container or its other contents.

This is useful for a destination where tapes are routinely unpacked—for example, a library receiving

tapes from transport boxes.

The related Empty Container option is broader: it removes all volume assignments from a container when the applicable confirmation occurs

[options](#), [repository options](#), [container](#)

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

https://docs.tapetrack.com/options/repository/deassign_from_container

Last update: **2026/08/27 07:43**

