


Internal

The [Repository](#) Option Internal designates the [Repository](#) to have an Internal purpose and should not be displayed in all applications.

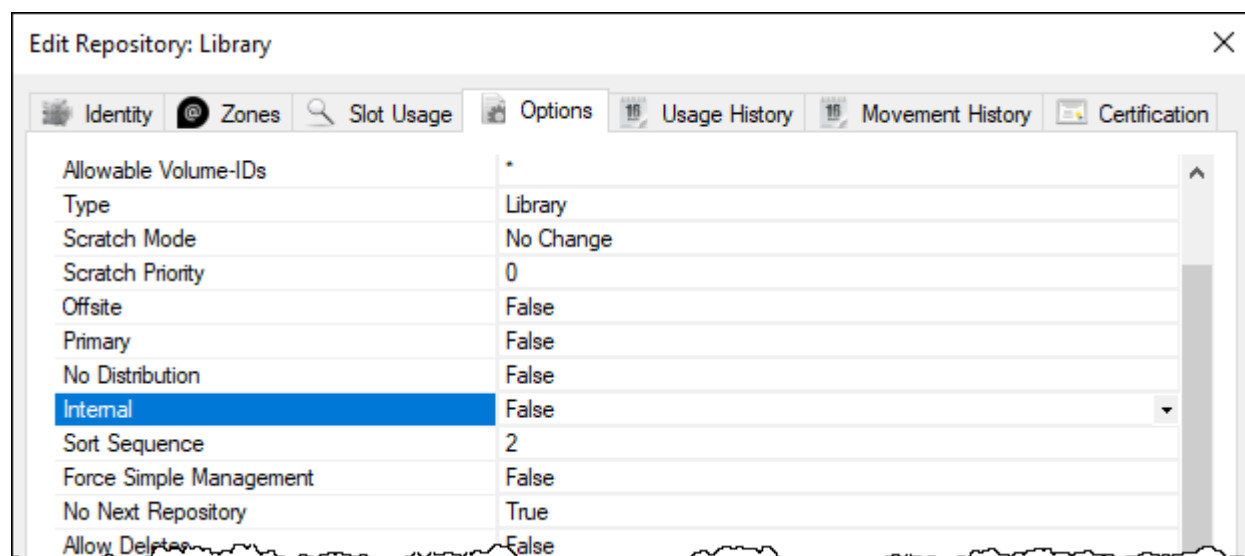

Internal Options

- True: Is designated as an Internal [Repository](#).
- False: Is not designated as an Internal [Repository](#).

The Internal repository option identifies a repository as being used internally by TapeTrack or for an administrative workflow.

When set to True:

- The repository may be hidden from applications or screens that only show normal operational repositories.
- It remains a valid repository in the TapeTrack database.
- Tapes can still be moved into and out of it where the application or process supports it.
- It does not automatically change movement, confirmation, slotting or Next Repository behaviour.

Typical uses include temporary holding locations, processing queues or system-managed repositories that ordinary TapeTrack Lite or Checkpoint users should not select.

Setting	Effect
False	Normal operational repository displayed by applications
True	Internal-purpose repository that may be omitted from some applications

For example, a temporary processing repository such as TEMP could be marked Internal so administrators can use it in TapeMaster without presenting it as a normal tape location in every client application.

The precise documented behaviour is that an internal repository “should not be displayed in all applications”; it does not guarantee it will be hidden everywhere.

[options](#), [repository options](#), [internal](#)

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

<https://docs.tapetrack.com/options/repository/internal>

Last update: **2026/08/27 07:31**

