Starting and Stopping the Service

When performing tasks such as server maintenance it may be necessary to manually start and stop the TapeTrack Service.


Windows

DOS Prompt


From a DOS prompt started as Administrator you can run the following commands:

net stop TMSS10SVC to stop the server.

net start TMSS10SVC to start the server.

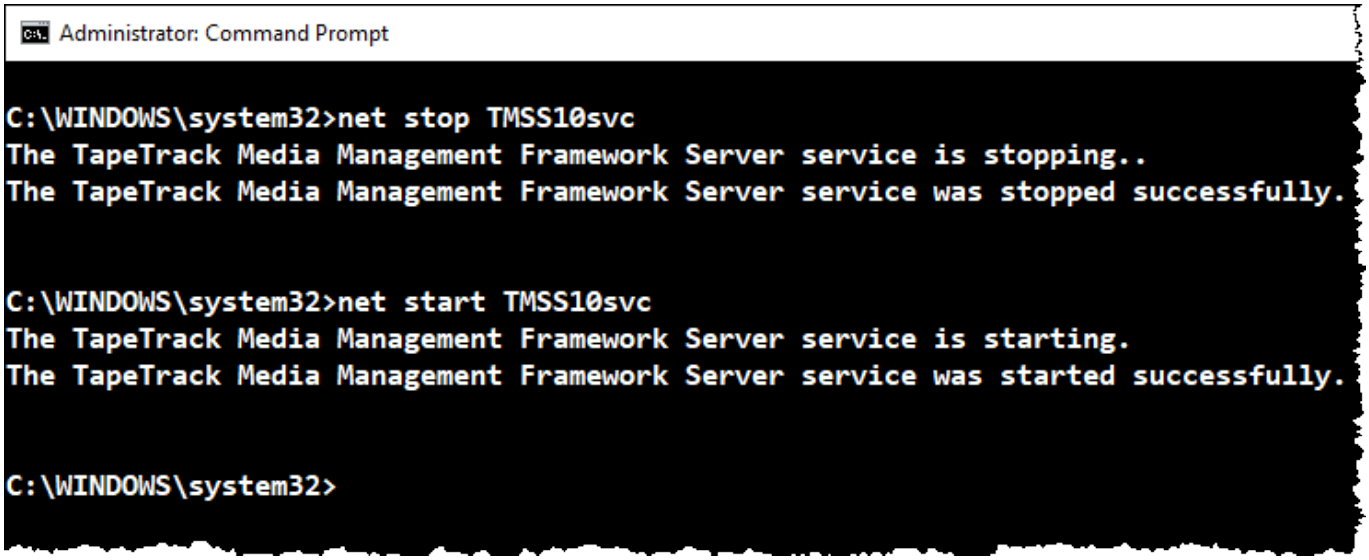


Windows Service Manager

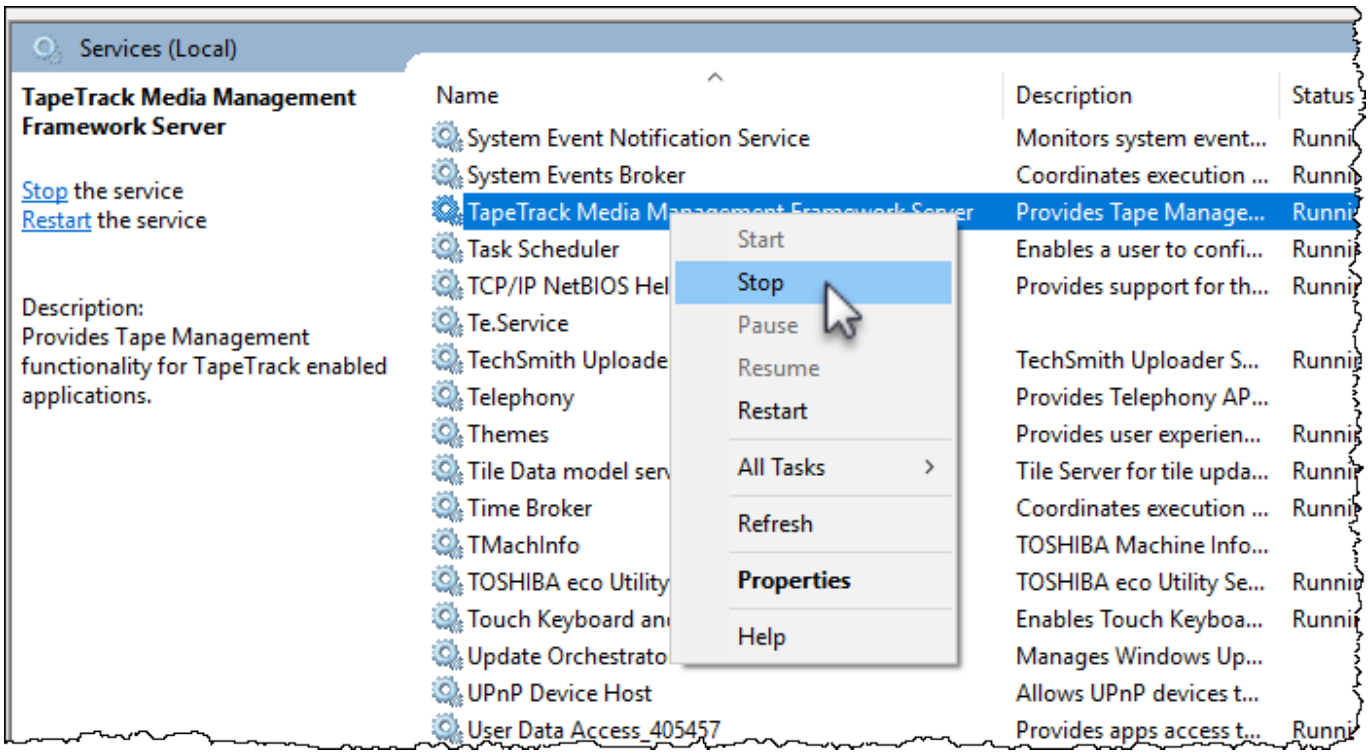

TapeTrack Server Helper

Run the TapeTrack Server Helper App and click the `Start` or `Stop` Button in the `Server Control Section`.

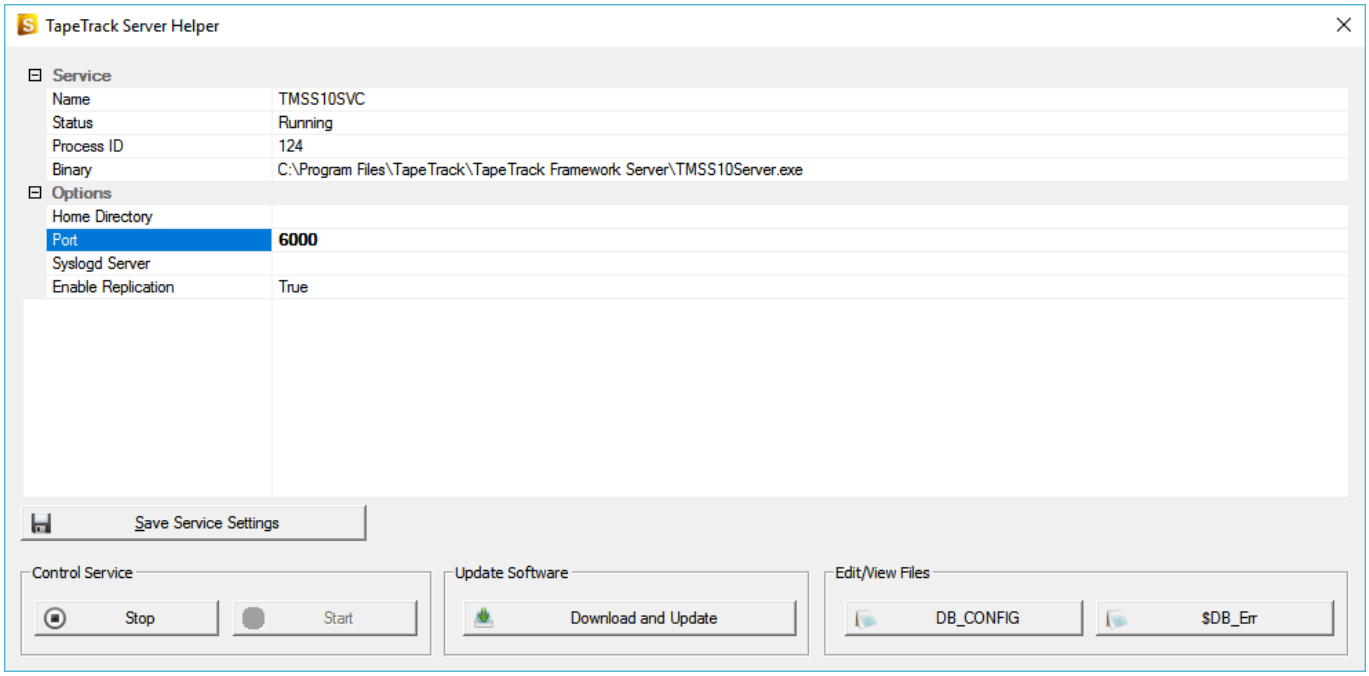

Linux

```
[root@gazillabyte ~]# service tapetrack stop
```

```
Stopping tapetrack (via systemctl):                        [  OK  ]
[root@gazillabyte ~]# service tapetrack start
Starting tapetrack (via systemctl):                        [  OK  ]
```

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/server/start_stop?rev=1512353312

Last update: **2025/01/21 22:07**