

Starting and Stopping the Service

When performing tasks such as server maintenance it may be necessary to manually start and stop the TapeTrack Service.


Windows

DOS Prompt

From a DOS prompt started as Administrator you can run the following commands:

net stop TMSS10SVC to stop the server.


net start TMSS10SVC to start the server.

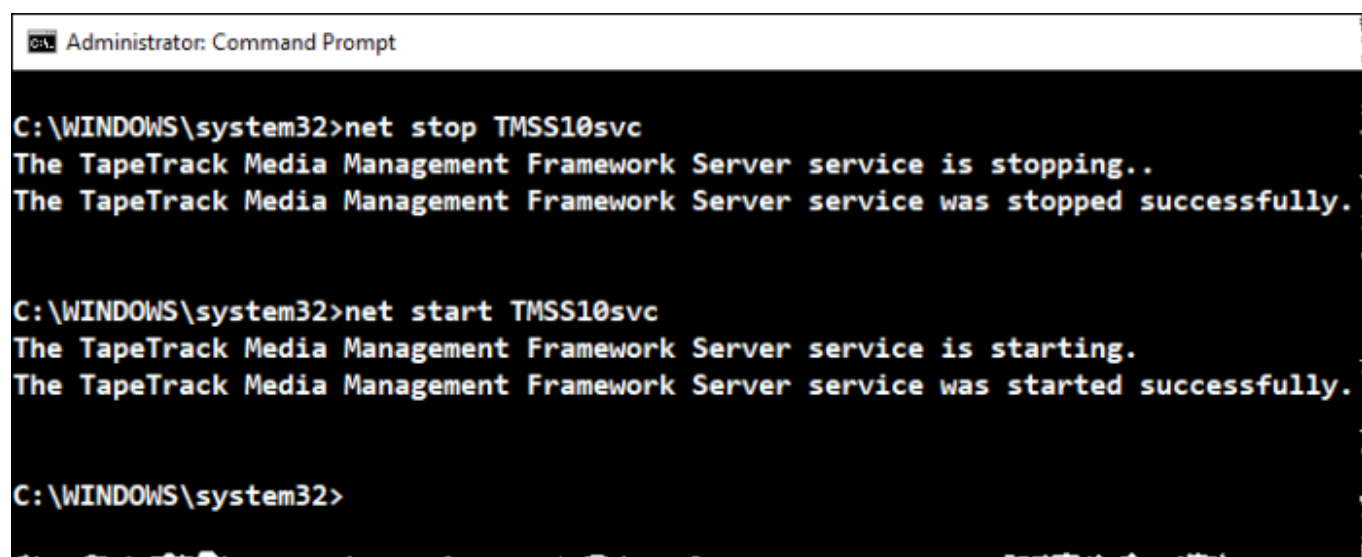A screenshot of a Windows Command Prompt window titled "Administrator: Command Prompt". The window has a black background with white text. The text shows the following commands and their outputs:
C:\WINDOWS\system32>net stop TMSS10svc
The TapeTrack Media Management Framework Server service is stopping..
The TapeTrack Media Management Framework Server service was stopped successfully.

C:\WINDOWS\system32>net start TMSS10svc
The TapeTrack Media Management Framework Server service is starting..
The TapeTrack Media Management Framework Server service was started successfully.


C:\WINDOWS\system32>

Windows Service Manager

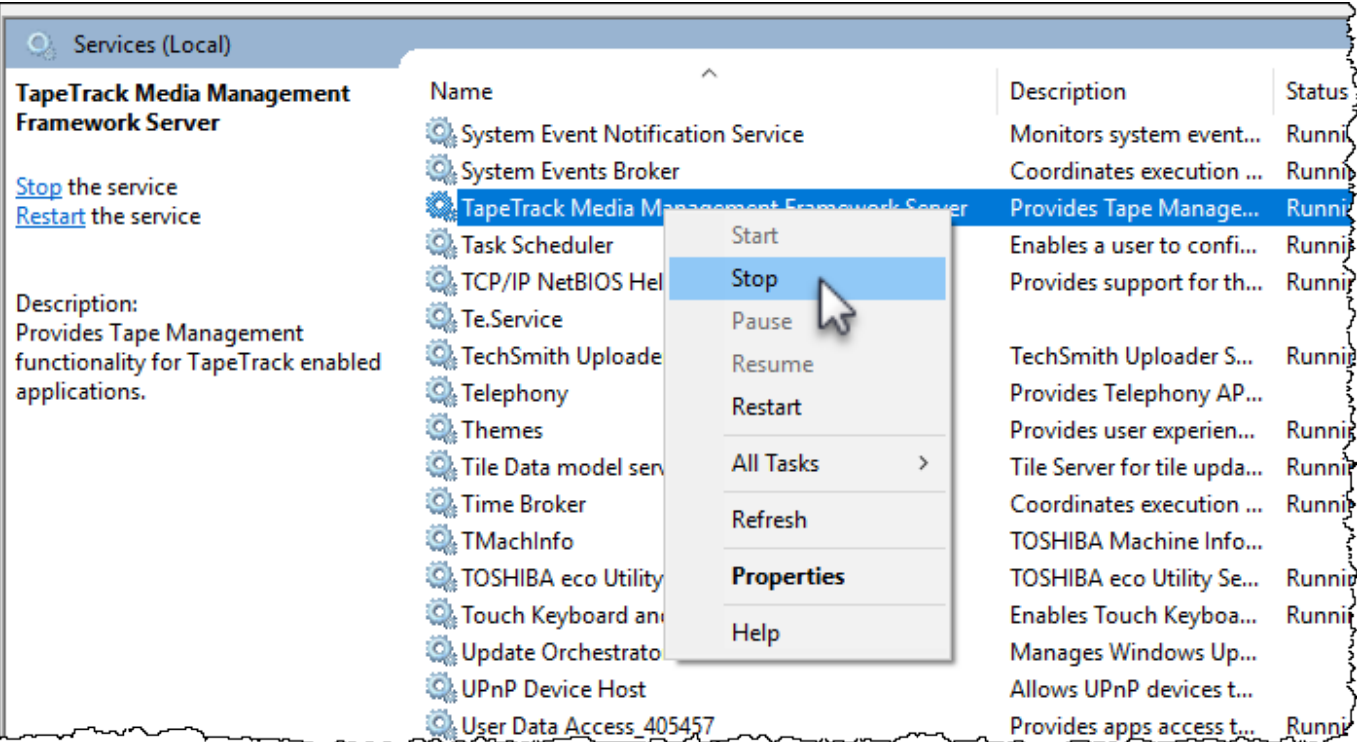

TapeTrack Server Helper

Run the TapeTrack Server Helper App and click the Start or Stop Button in the Server Control Section.

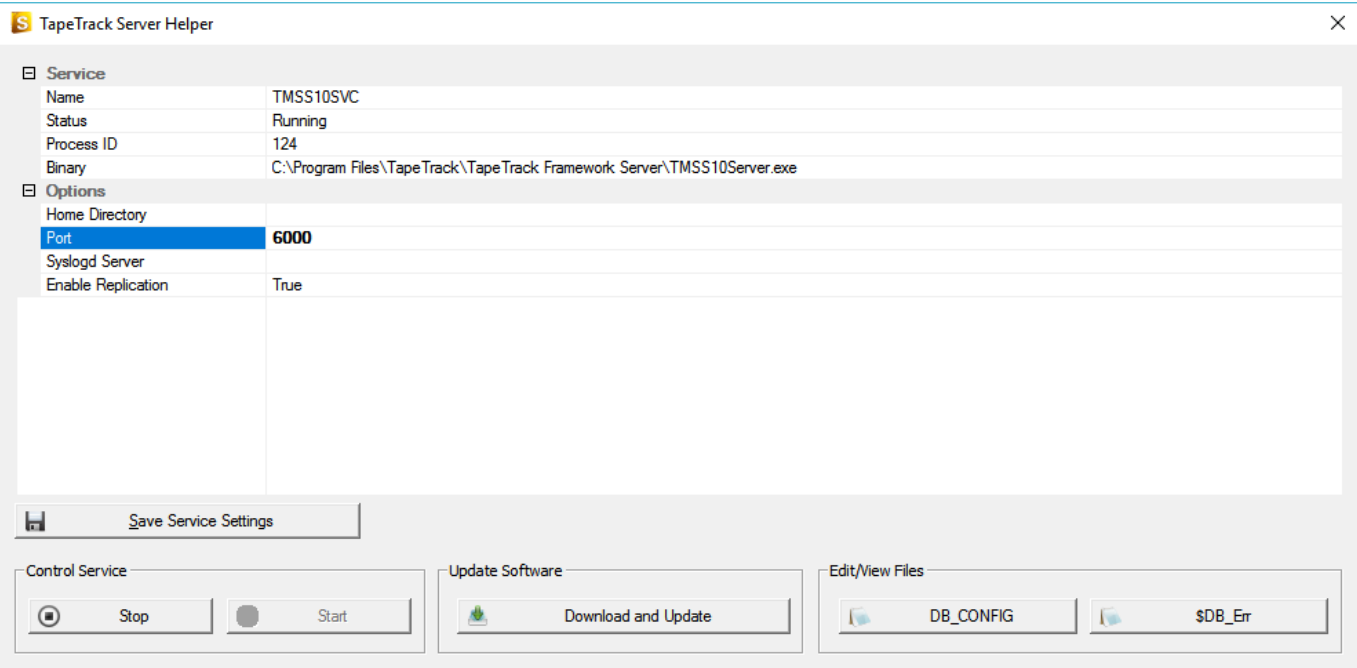

Linux

```
[root@gazillabyte ~]# service tapetrack stop
```

```
Stopping tapetrack (via systemctl): [ OK ]
[root@gazillabyte ~]# service tapetrack start
Starting tapetrack (via systemctl): [ OK ]
```

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

https://docs.tapetrack.com/server/start_stop?rev=1512354827

Last update: **2025/01/21 22:07**

