

Starting and Stopping the Service

When performing tasks such as server maintenance it may be necessary to manually start and stop the TapeTrack Service.

Windows

DOS Prompt

From a DOS prompt started as Administrator you can run the following commands:

```
<sxh> Microsoft Windows [Version 10.0.17134.523] © 2018 Microsoft Corporation. All rights reserved.
```

```
C:\WINDOWS\system32>net stop tmss10svc The TapeTrack Media Management Framework Server service is stopping..... The TapeTrack Media Management Framework Server service was stopped successfully.
```


```
C:\WINDOWS\system32> </sxh>
```

```
<sxh> Microsoft Windows [Version 10.0.17134.523] © 2018 Microsoft Corporation. All rights reserved.
```

```
C:\WINDOWS\system32>net start tmss10svc The TapeTrack Media Management Framework Server service is starting..... The TapeTrack Media Management Framework Server service was started successfully.
```

```
C:\WINDOWS\system32> </sxh>
```


Windows Service Manager

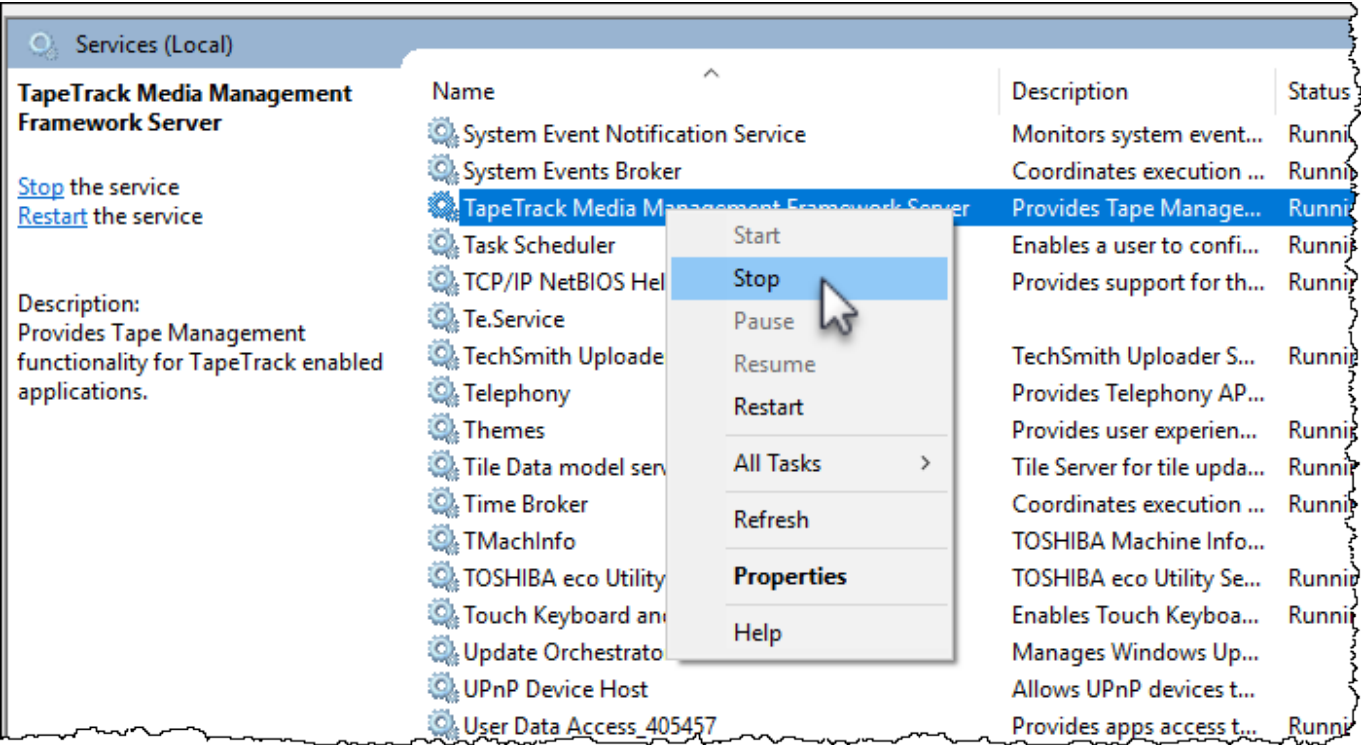

TapeTrack Server Helper

TapeTrack Server Helper can be found in th TapeTrack installation directory, default install location is C:\Program Files\TapeTrack\TapeTrack Framework Server\TMSS10ServerHelper.exe

Run the TapeTrack Server Helper App and click the Start or Stop button in the **Control Server** Section.

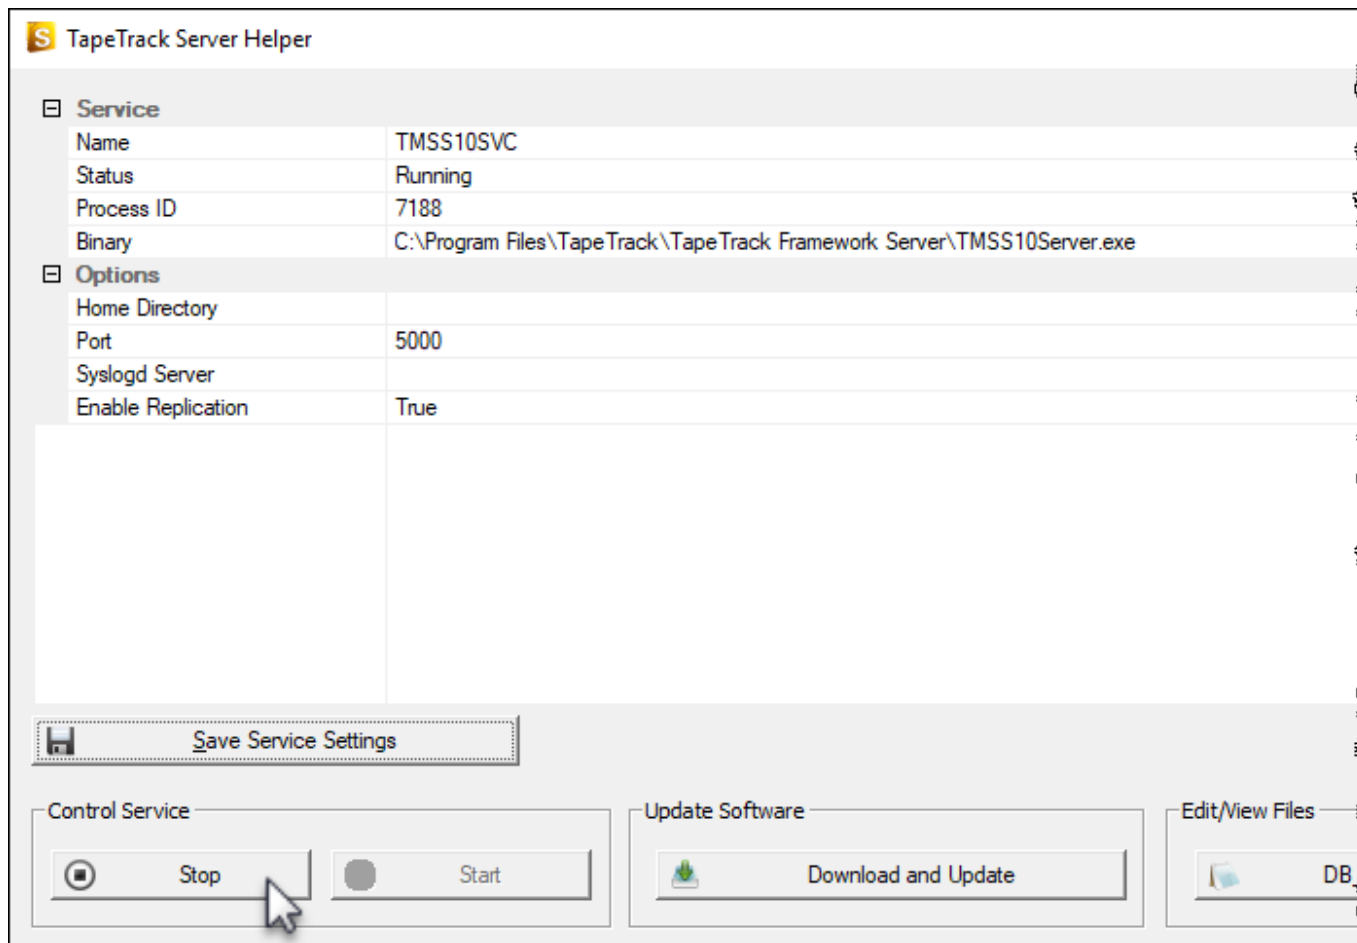

Linux

```
<sxh> [root@gazillabyte ~]# service tapetrack stop Stopping tapetrack (via systemctl): [ OK ]  
[root@gazillabyte ~]# service tapetrack start Starting tapetrack (via systemctl): [ OK ] </sxh>
```

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

https://docs.tapetrack.com/server/start_stop?rev=1620175641

Last update: **2025/01/21 22:07**

