Starting and Stopping the Service

When performing tasks such as server maintenance it may be necessary to manually start and stop the TapeTrack Service.

Windows

DOS Prompt

From a DOS prompt started as Administrator you can run the following commands:

```
Microsoft Windows [Version 10.0.17134.523]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\WINDOWS\system32>net stop tmss10svc
The TapeTrack Media Management Framework Server service is stopping.......
The TapeTrack Media Management Framework Server service was stopped
successfully.

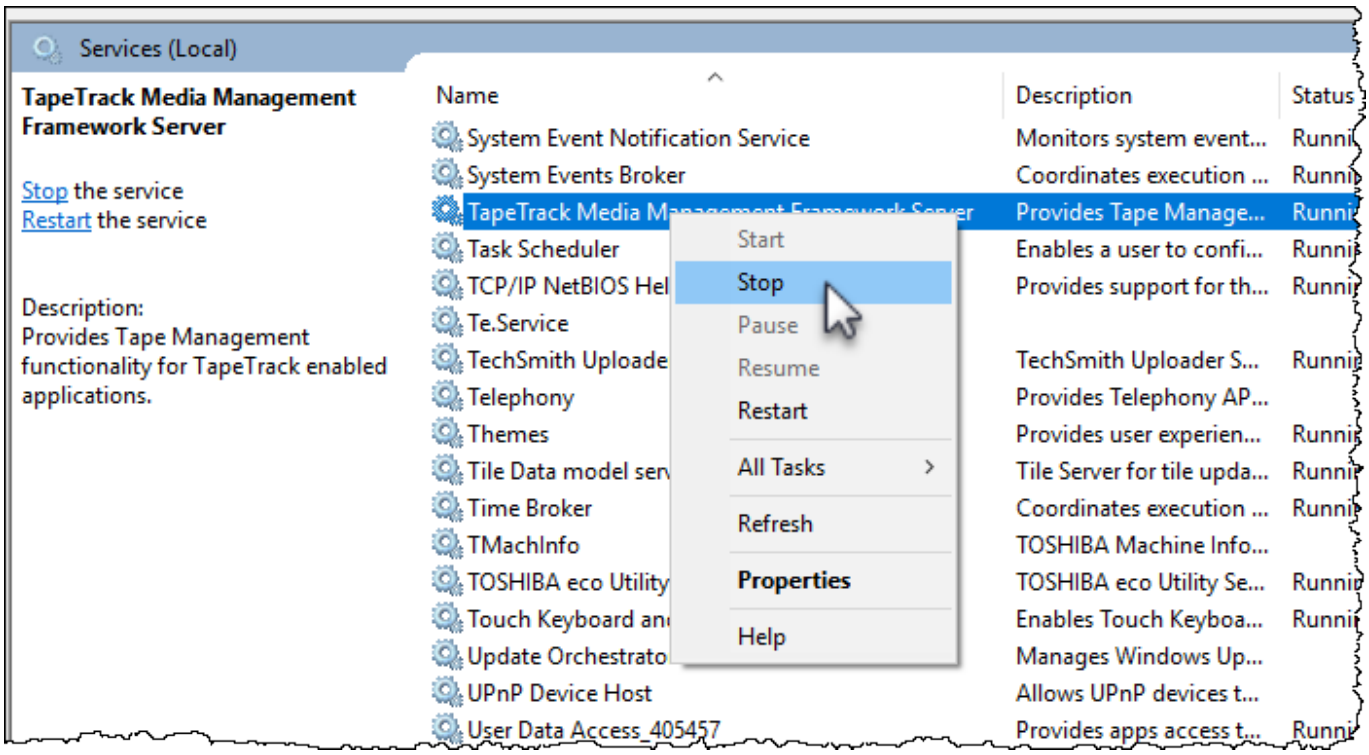

C:\WINDOWS\system32>
```

```
Microsoft Windows [Version 10.0.17134.523]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\WINDOWS\system32>net start tmss10svc
The TapeTrack Media Management Framework Server service is starting.......
The TapeTrack Media Management Framework Server service was started
successfully.


C:\WINDOWS\system32>
```

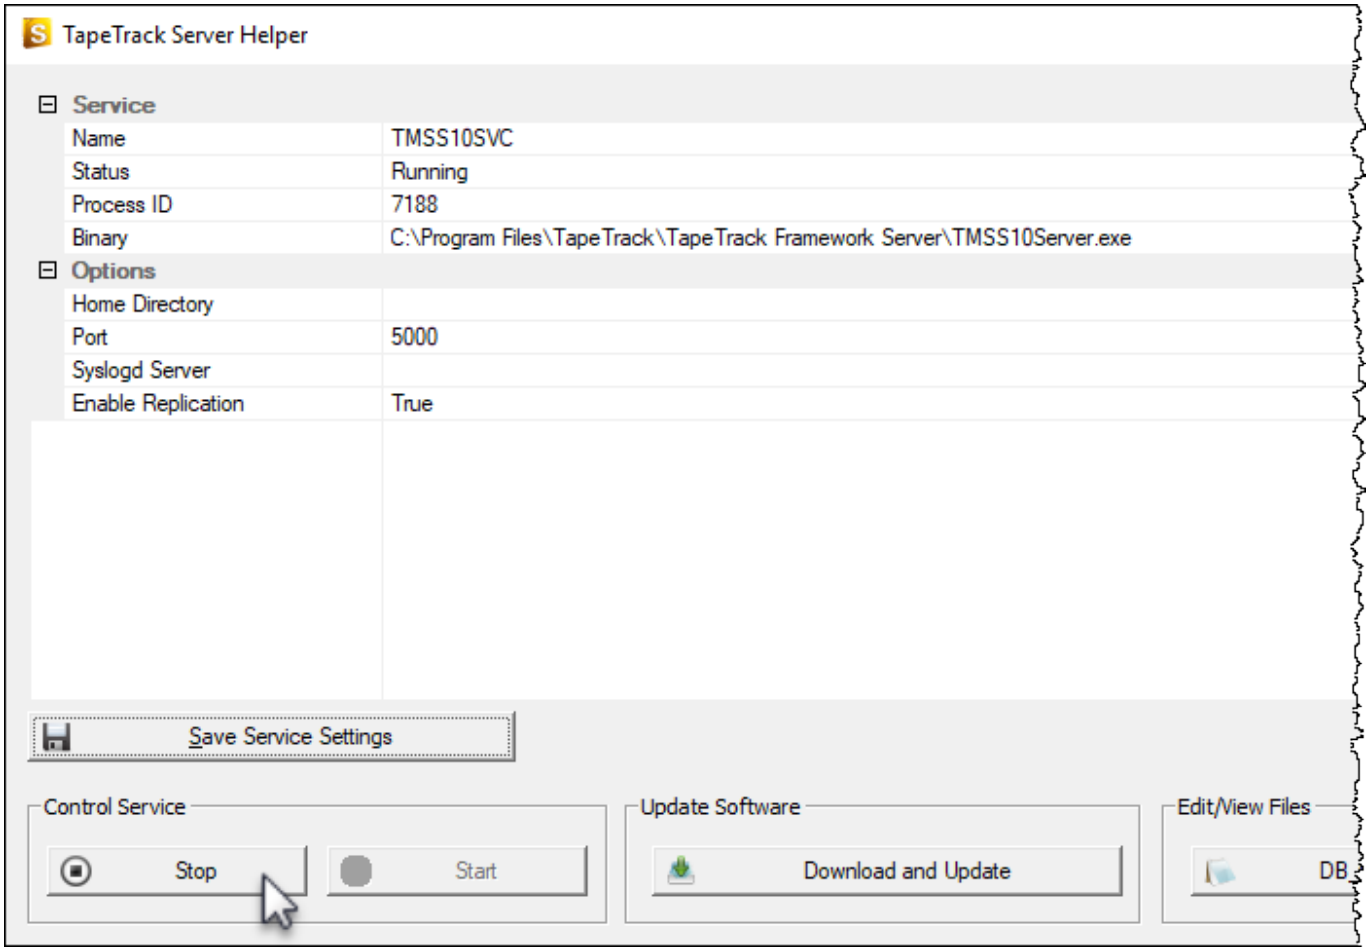
Windows Service Manager



TapeTrack Server Helper

TapeTrack Server Helper can be found in th TapeTrack installation directory, default install location is C:\Program Files\TapeTrack\TapeTrack Framework Server\TMSS10ServerHelper.exe

Run the TapeTrack Server Helper App and click the `Start` or `Stop` button in the **Control Service** Section.



Linux

```
[root@gazillabyte ~]# service tapetrack stop
Stopping tapetrack (via systemctl):                        [  OK  ]
[root@gazillabyte ~]# service tapetrack start
Starting tapetrack (via systemctl):                        [  OK  ]
```

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/server/start_stop?rev=1626919533

Last update: **2025/01/21 22:07**