
Deleting Volumes

You must have **Alter** rights to delete volumes


Select the required Volume, or range of Volumes from the Inventory window you want to delete.

Right click highlighted Volume/s and select `Delete`, or press Delete (DEL) on the keyboard.

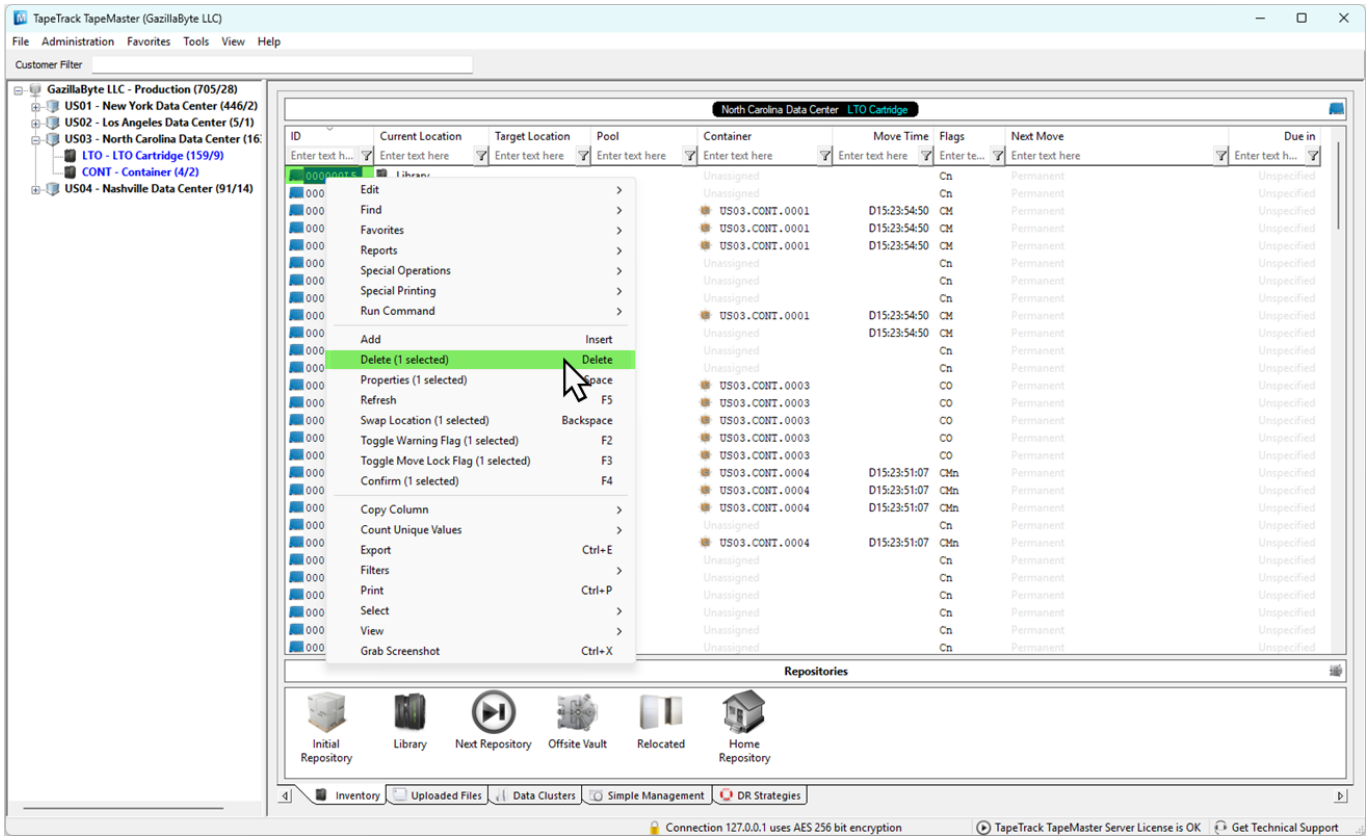

The **Volume Deletion** window will display the **Repositories** where the volumes to be deleted are located in the top pane and Volume-ID's in the lower pane.


If the **Volume Deletion** window is not displayed it is because you are running an outdated version of TapeMaster. Instructions to delete volumes in older versions of TapeMaster can be found here

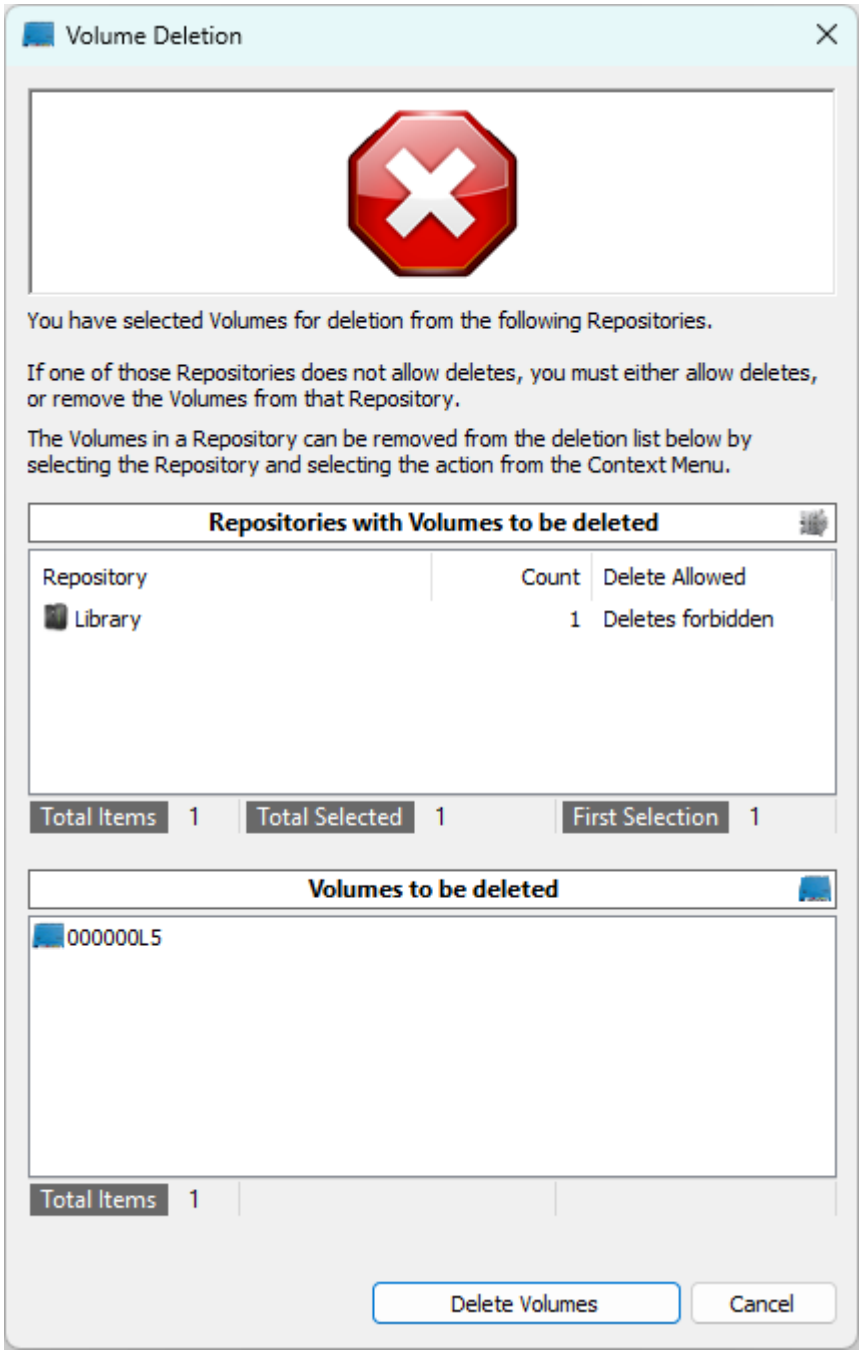

Each row in the top pane will, along with the repository description (or ID), list the number of volumes for deletion and the delete status of either **Deletes Allowed** or **Deletes Forbidden**.


For any repository listed with a status of **Deletes Forbidden** you must either:

- Right clicking the row and selecting `Allow` to change status to **Deletes Allowed**
- Right clicking the row and selecting `Remove` to remove the volumes before deletion of any volumes located in a repository with **Deletes Allowed** status.

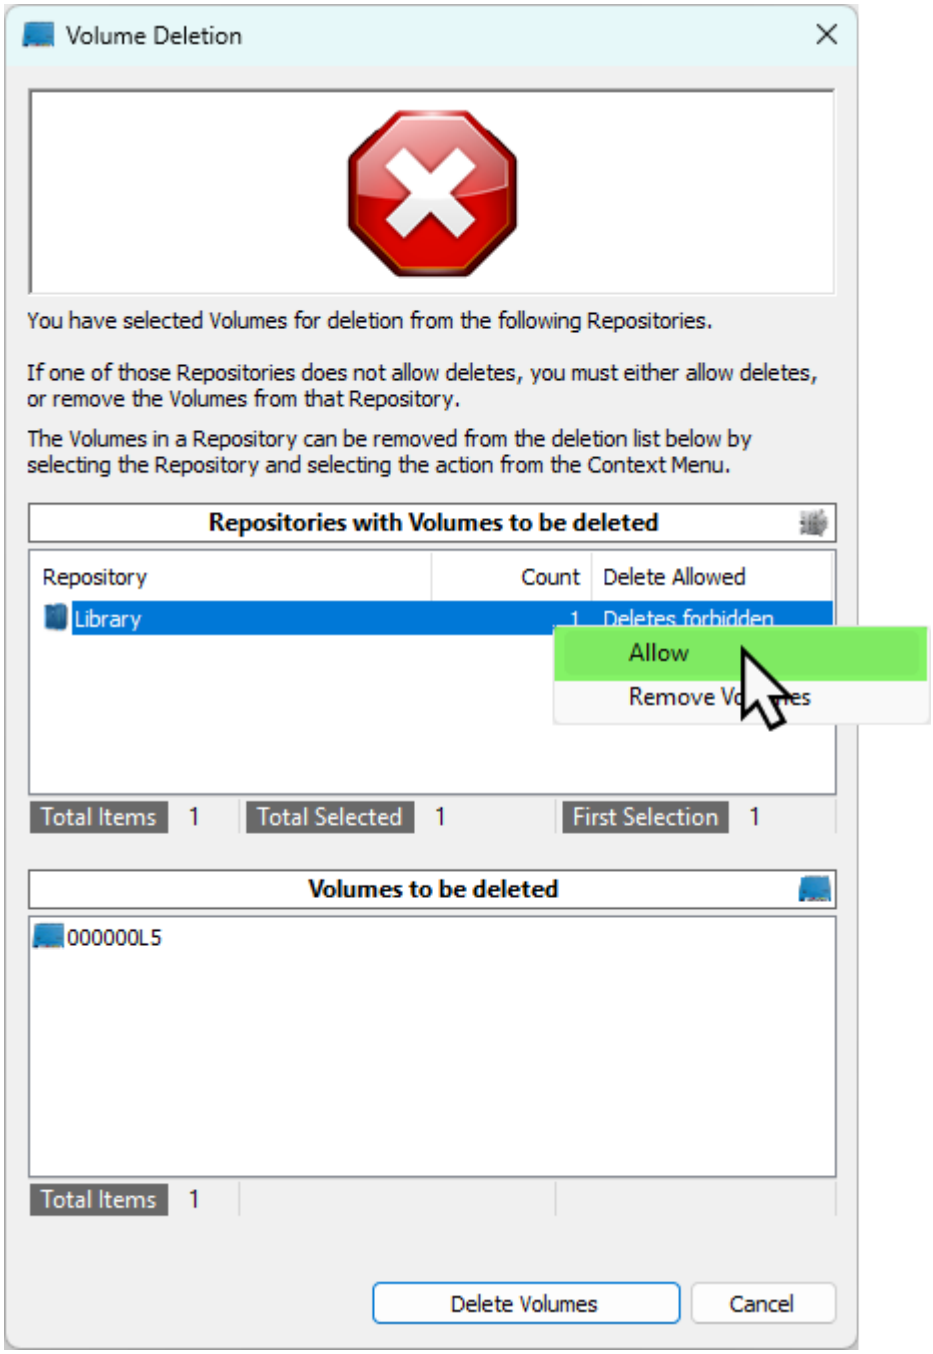

Select the Volume/s to be deleted and click `Delete Volumes`.

Click `Yes` to the delete confirmation to delete the Volumes.

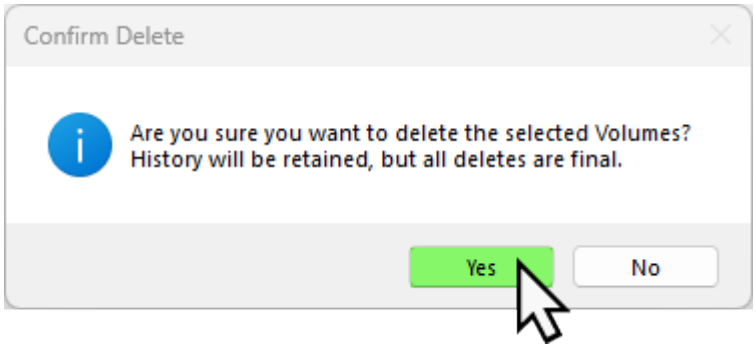


As deleting volumes is permanent, clicking `No` to the delete confirmation is your last opportunity to

cancel the delete function.




When a volume is deleted its historical entries remain in the database. If a deleted Volume is added back in to the database, all previous history records including when deleted and added back, are listed under that volumes `History` tab.

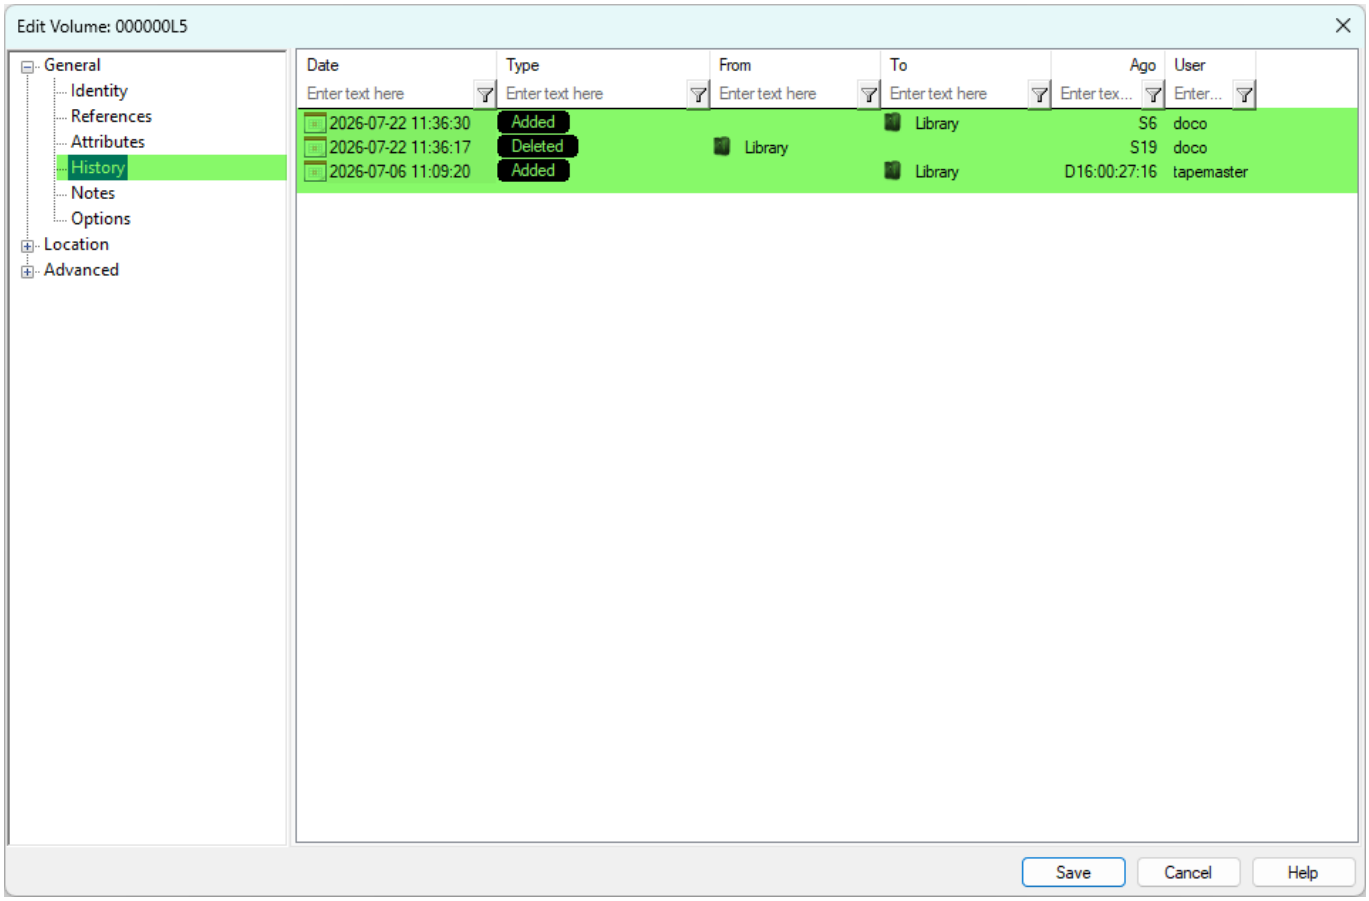

When a Volume is deleted its historical entries remain in the database. If a deleted Volume is added back into the database, all previous history records including when deleted and added back, are listed under that Volumes `History` tab.

As setting Repository to **Allow Deletes** alters the properties of that Repository, if required, reset the Repository to **no deletes** by right-clicking the required Repository, selecting `Properties` and change the `Allow Deletes` field in the `Options` tab to false.

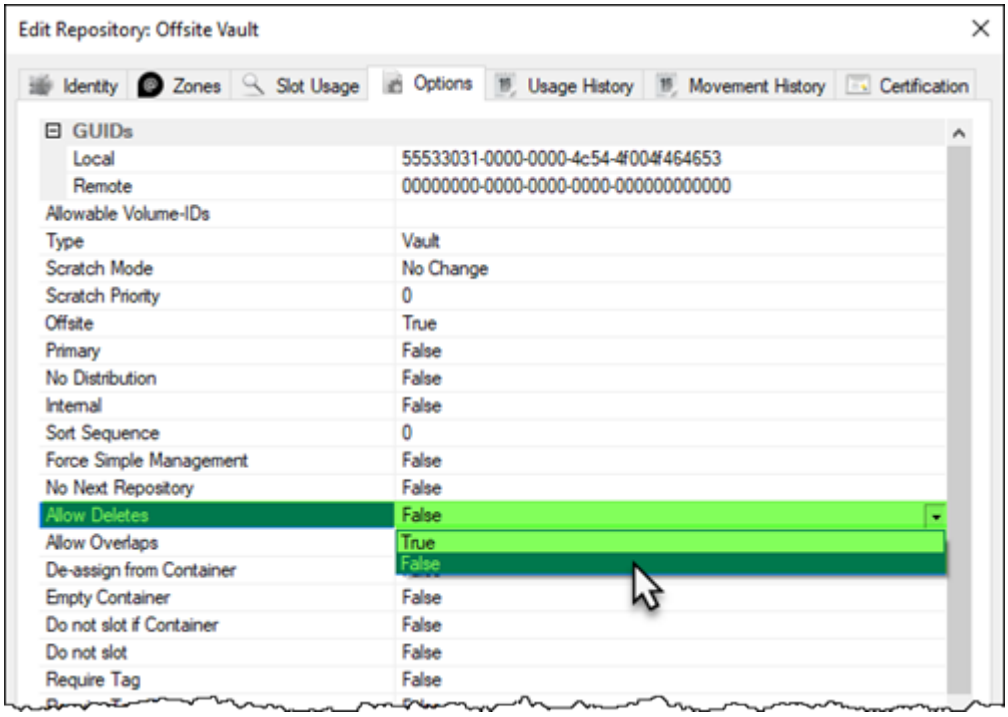

technote, volumes, delete, master

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/technote/delete_volumes?rev=1784684064

Last update: **2026/07/22 01:34**