

Finding Host Address

Methods for finding Host address to connect TapeTrack Desktop and Command Line Software to the Framework Server.

Using Windows Command Prompt

Hostname

Enter the command hostname into the Command Prompt

```
<sxh>hostname</sxh>
```

The hostname will be displayed in the output.



IPCONFIG

Enter the ipconfig command into the Command Prompt with the attribute /all

```
<sxh> ipconfig /all </sxh>
```

At the top of the output under the heading Windows IP Configuration will be the Host Name, in this example GazillaByte.

```
Command Prompt

C:\Users\GazillaByte>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : GazillaByte
    Primary Dns Suffix . . . . . :
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No
    DNS Suffix Search List. . . . . :

Ethernet adapter Ethernet:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix . . . . . :
    Description . . . . . : Realtek PCIe GbE Family Controller
```

Further down in the output will be the IP4 address, under either the heading Ethernet adapter Ethernet if your connected by LAN cable or Wireless LAN adapter Wi-Fi if your connected to a Wi-Fi network. In this example 192.168.10.96

```
Command Prompt

Wireless LAN adapter Wi-Fi:

    Connection-specific DNS Suffix . . . . . :
    Description . . . . . : Intel(R) Wireless-AC 9460
    Physical Address. . . . . : 88-E8-3D-DE-9D-80
    DHCP Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . . : Yes
    IPv6 Address. . . . . : fe80::5561:2746:f133:4b42%12(Preferred)
    Temporary IPv6 Address. . . . . : fe80::5561:2746:f133:4b42%12(Preferred)
    Link-local IPv6 Address . . . . . : fe80::5561:2746:f133:4b42%12(Preferred)
    IPv4 Address. . . . . : 192.168.10.96(Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Lease Obtained. . . . . : Monday, May 11, 2020 8:09:03 AM
    Lease Expires . . . . . : Monday, May 11, 2020 11:02:03 AM
    Default Gateway . . . . . : 192.168.10.1
```


Using Linux Command Line

Hostname

Enter the command hostname into the Command Line

```
<sxh>hostname</sxh>
```

The hostname will be displayed in the output.

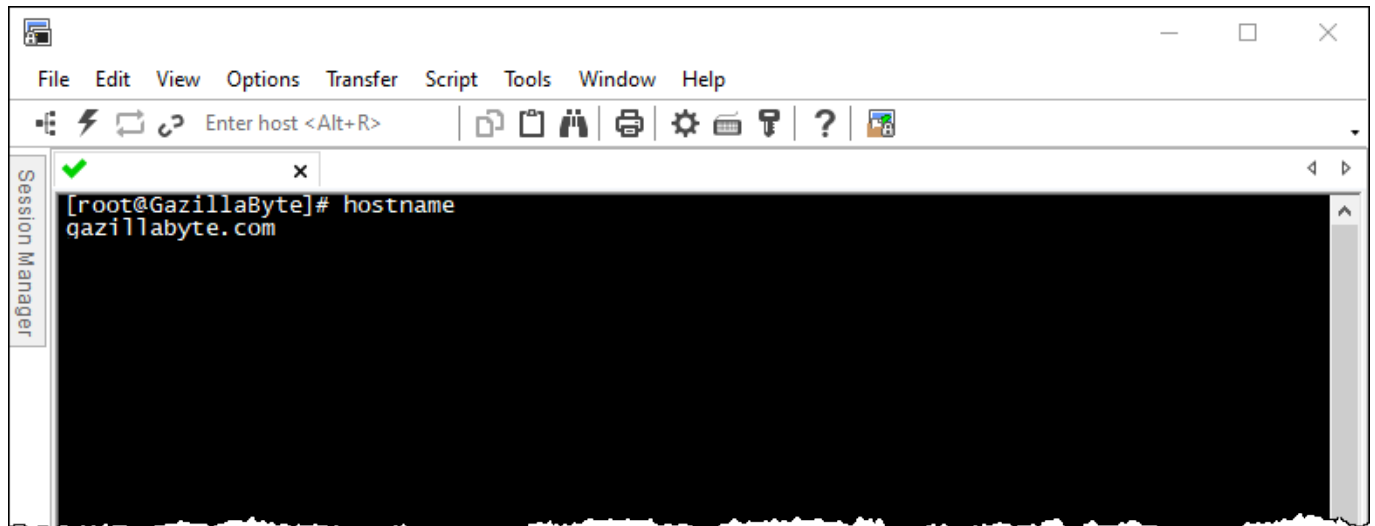

From:

<https://docs.tapetrack.com/> - TapeTrack Documentation

Permanent link:

https://docs.tapetrack.com/technote/finding_host_address?rev=1620355907

Last update: **2025/01/21 22:07**

