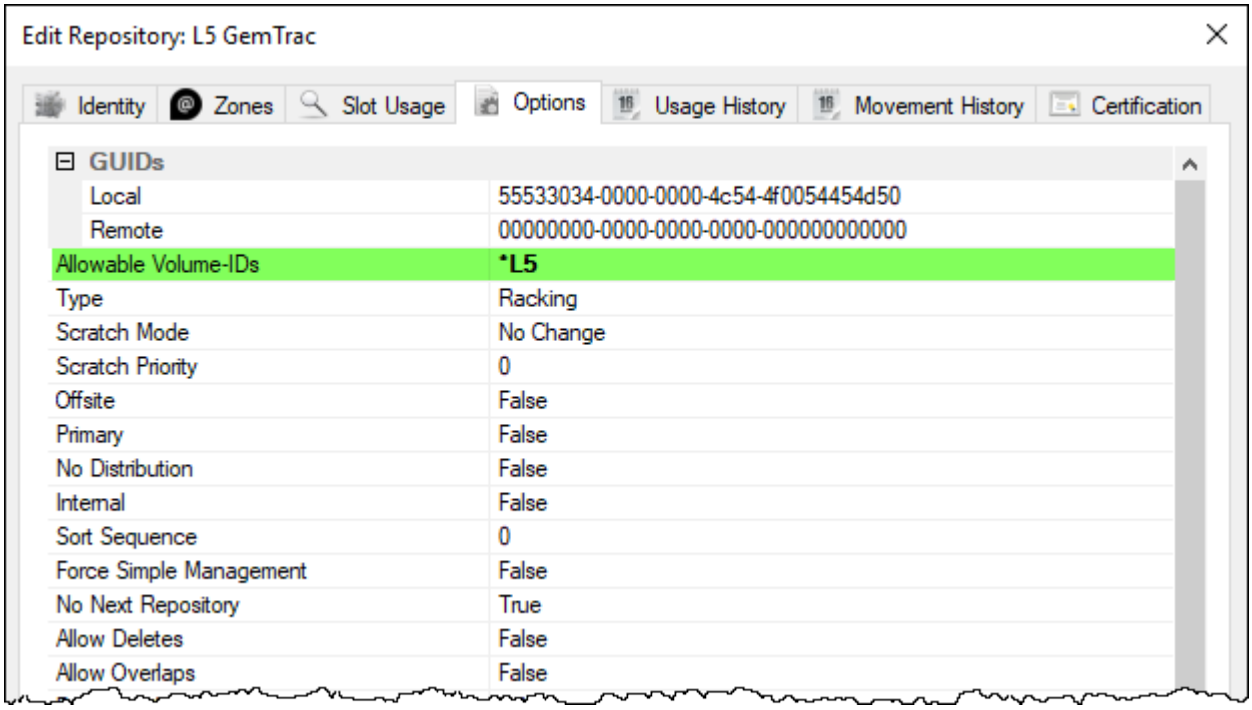
# Restricting Which Volume-ID's Can Be Moved To A Repository.

TapeTrack allows the restriction of what volumes can be moved to a repository based on a pattern specified in the Repository properties.

## Setting Volume-ID Restrictions

Open the required repository's properties and navigate to the `Options` tab.

Click in the field to the right of `Allowable Volume-ID's` and enter allowable volumes string pattern.



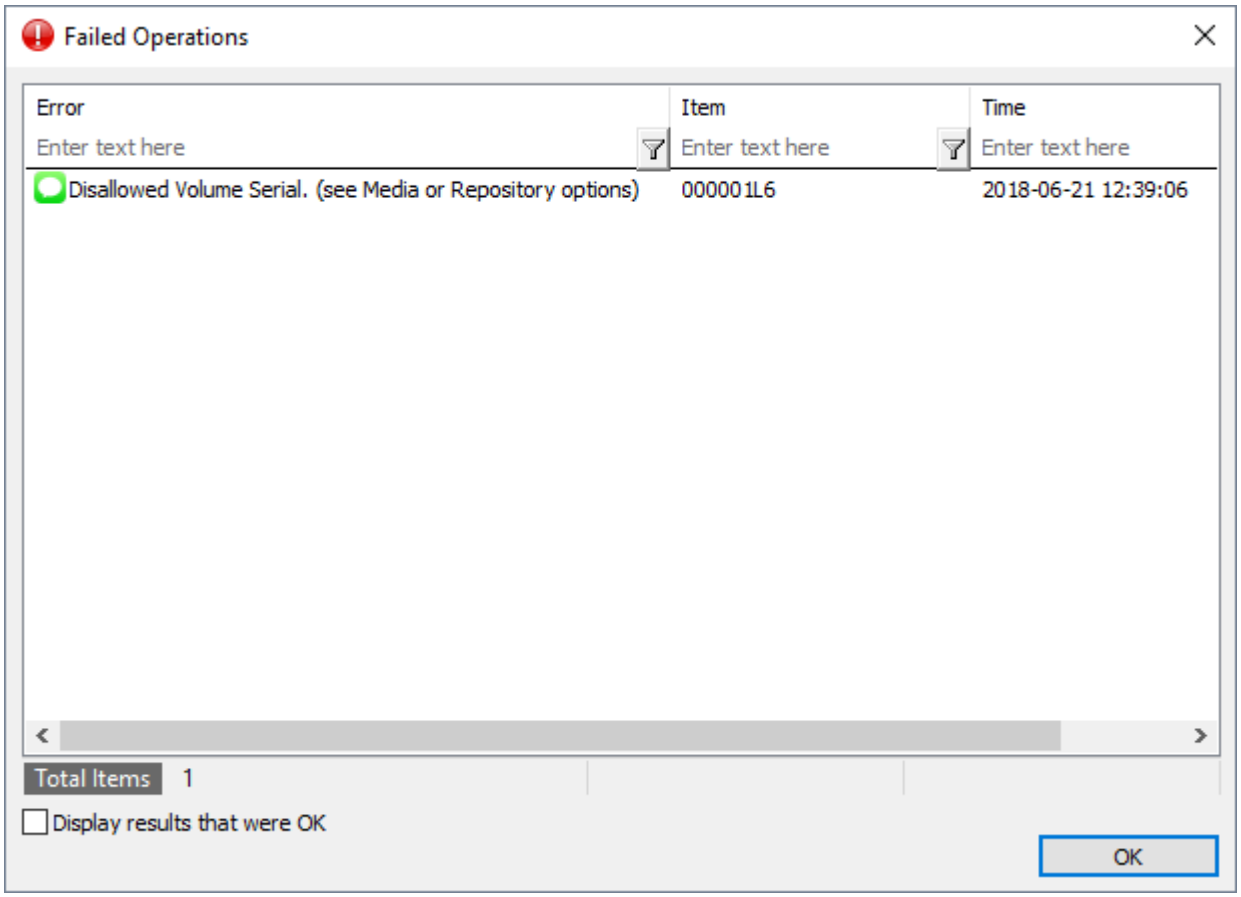

Restricting volume-ID patterns can be enforced using TapeTrack string filters.

Character filters may be used alone or in combination to achieve the restricted volume-ID pattern required.

### Example Patterns

| Volume-ID required | Filter Pattern | Example Volume-ID |
|---|---|---|
| Only volumes ending in L5 | *L5 | 100001L5 |
| Any volumes except those ending in L5 | !*L5 | 100002L6 |
| Volumes ending in L5 or starting with X- | *(*L5\|X-*) | X-2E8CA12F |

Any attempt to move a volume with a non compliant volume-ID will cause an error and the move will be aborted.




From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
**https://docs.tapetrack.com/technote/restricting_volumeid_by_repository?rev=1551304500**

Last update: **2025/01/21 22:07**