
Restricting Which Volume-ID's Can Be Moved To A Repository.

TapeTrack allows the restriction of what Volumes can be moved to a Repository based on a pattern specified in the Repository properties.

Setting Volume-ID Restrictions

Open the required Repository's properties and navigate to the `Options` tab.

Click in the field to the right of `Allowable Volume-ID's` and enter allowable Volumes string pattern.

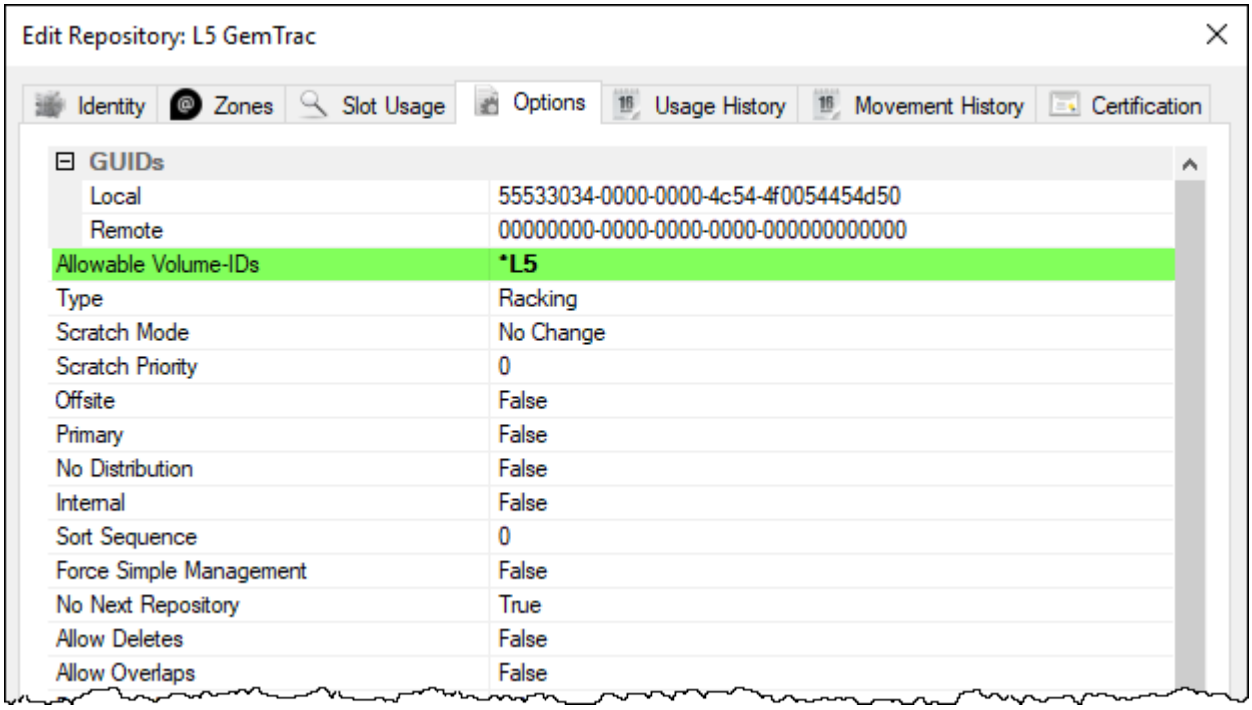


Restricting Volume-ID patterns can be enforced using TapeTrack string filters.

Character filters may be used alone or in combination to achieve the restricted Volume-ID pattern required.

Example Patterns

Volume-ID required	Filter Pattern	Example Volume-ID
Only Volumes ending in L5	*L5	100001L5
Any Volumes except those ending in L5	!*L5	100002L6
Volumes ending in L5 or starting with X-	*(*L5|X-*)	X-2E8CA12F

Any attempt to move a Volume with a non compliant Volume-ID will cause an error and the move will be aborted.

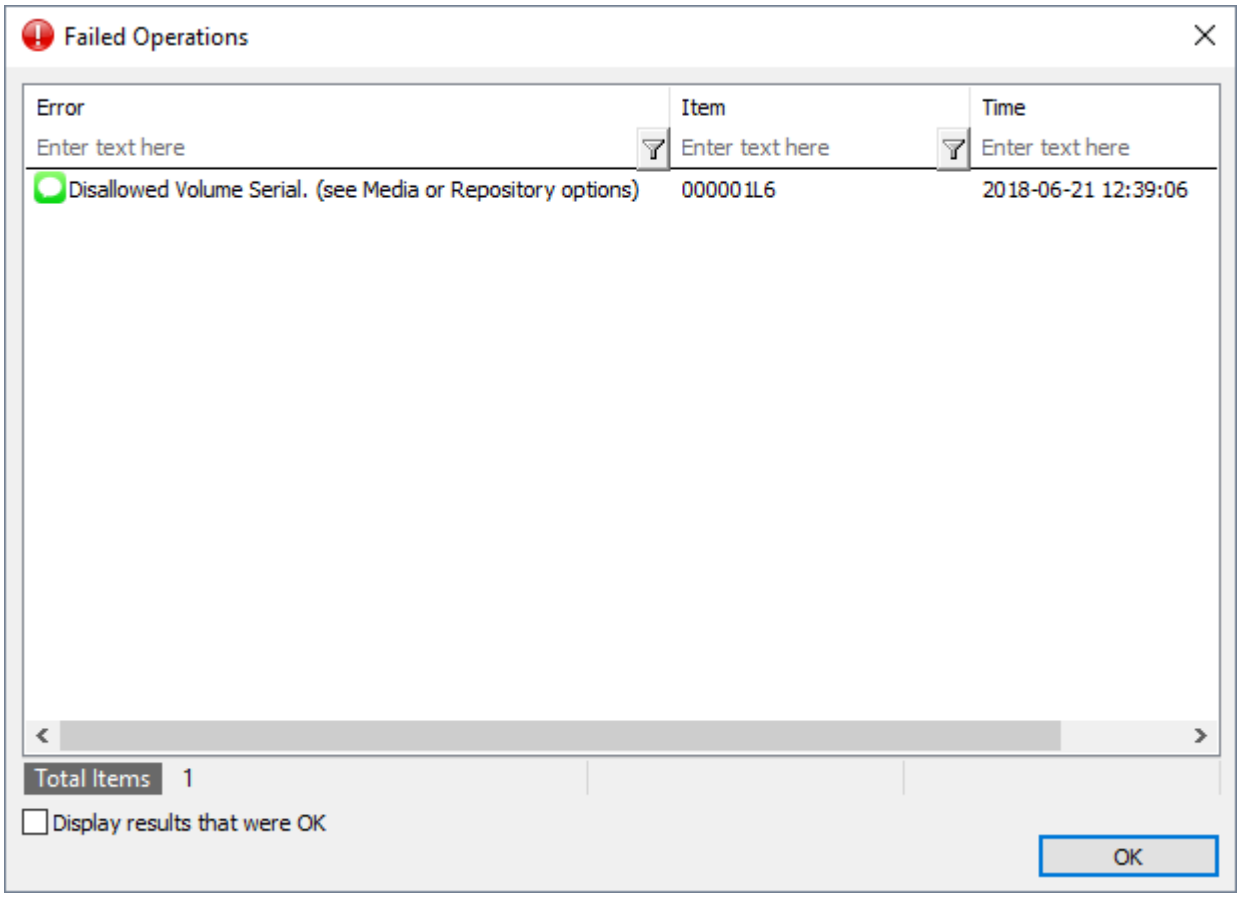

technote, tapemaster

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/technote/restricting_volumeid_by_repository?rev=1737497272

Last update: **2025/01/21 22:07**