

User Access Rights

[User](#) access rights, or privileges, for TapeTrack are divided into software rights and [Customer](#) access. This allows the same software privileges to be assigned to different [Users](#) while also choosing which [Customers](#) they have access to.

User Rights

[User](#) rights assign access rights for the TapeTrack software menus and functions.

Administration Rights

Administration Rights allow a user-ID to:

- Set Allow Deletes for [Volumes](#) to true or false
- Add and delete Repositories
- Add and delete [Media Types](#)
- Add and delete [Customers](#)
- Set [Customer](#) options
- Set [Media](#) options
- Set Repository options

Scan-In Only

Scan-In Only restrict the user-ID to only being able to Scan-in the [Volumes](#) to their Target location.

Tapemaster Rights

tapemaster rights give the user-ID tapemaster super rights (full administration and total access) which allow:

- Access to the Administration main menu functions
- Add, Delete or disable user-ID's
- Active [Users](#)
- Barcode administration
- [User](#) administration
- Server options and statistics
- Stock Control
- Zone administration
- Server Licensing

Certify Rights


Certify rights allow a user-ID to create and read certificates.

Client Access rights determine which desktop software the user-ID has access to. The access rights are for TapeMaster, Lite, Checkpoint and Sync.

Customer Access Rights

[Customer](#) access rights can be assigned to a [User](#) on a per [Customer](#) basis. For example you may assign full [Customer](#) access to a staff member at the location of that [Customer Volumes](#) but only read access for other [Customers Volumes](#).

The Customer-ID needs to be added, not shown in images as Customer-ID's are unique to every installation. If access to all Customer-ID's is required use an asterisk as a wildcard. Once access rights have been set, click Add to commit the data. This process can be repeated for each Customer-ID required.

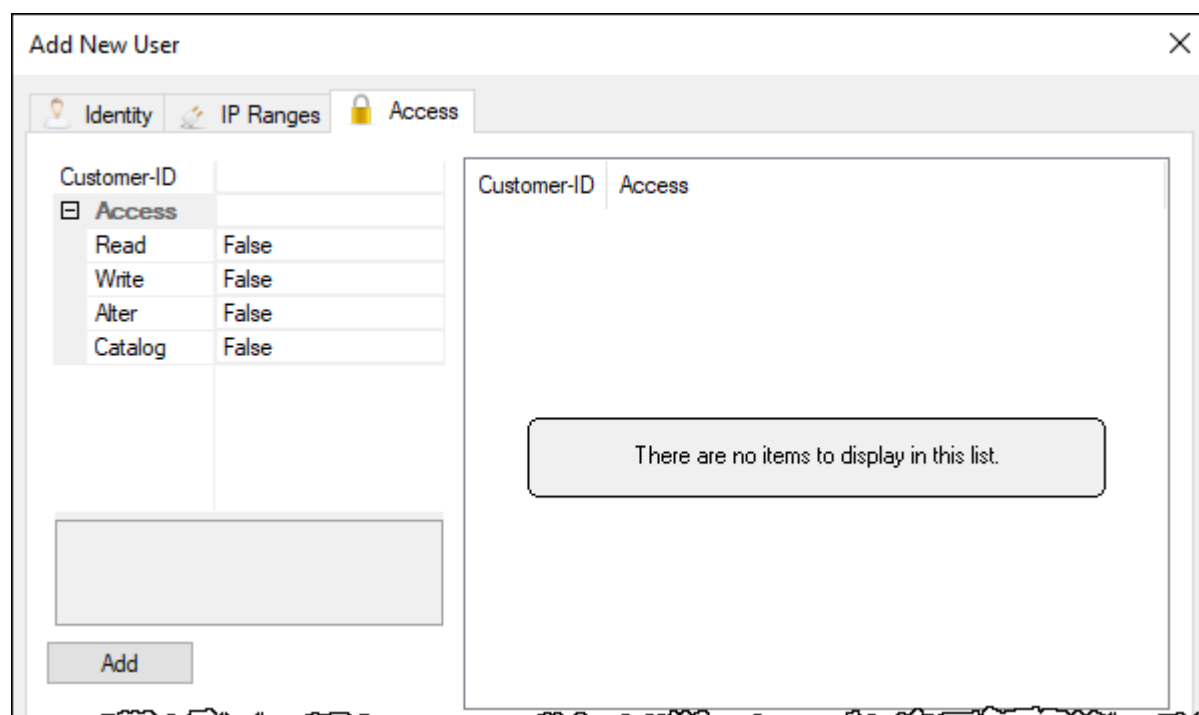

The screenshot shows the 'Add New User' dialog box with the 'Access' tab selected. The 'Access' tab contains a table with columns 'Customer-ID' and 'Access'. The table is empty, displaying the message 'There are no items to display in this list.' Below the table is an 'Add' button.

Customer-ID	Access
☐ Access	
Read	False
Write	False
Alter	False
Catalog	False

There are no items to display in this list.

Add

Read Access

Read access allows the [User-ID](#) to view the Inventory for the assigned [Customer-ID](#) but not make any alterations to the data including the [Volume's](#) location or attributes.

Add New User

Identity IP Ranges Access

Customer-ID	Access
Read	True
Write	False
Alter	False
Catalog	False

Read
User will be able to read information on the defined Customer-ID

Add

There are no items to display in this list.

Write Access

Write access allows the [User-ID](#) to:

- Place [Volumes](#) into a move
- Confirm [Volumes](#) into Repositories
- Add or change [Volume](#) attributes and Flags

Add New User

Identity IP Ranges Access

Customer-ID	Access
Read	True
Write	True
Alter	False
Catalog	False

Write
User will be able to write information on the defined Customer-ID

Add

There are no items to display in this list.

Alter Access

Alter access allows the [User-ID](#) to:

- Add [Volumes](#)
- Delete [Volumes](#) if current Repository set to Allow Deletes

Add New User

Identity IP Ranges Access

Customer-ID	
Access	
Read	True
Write	True
Alter	True
Catalog	False

Alter
User will be able to delete and add information on the defined Customer-ID

Add

Customer-ID Access

There are no items to display in this list.

Catalog Access

Catalog access allows the [User-ID](#) to access Catalog information

Add New User

Identity IP Ranges Access

Customer-ID	
Access	
Read	True
Write	True
Alter	True
Catalog	True

Catalog
User will be able to access Catalog information on the defined Customer-ID

Add

Customer-ID Access

There are no items to display in this list.

[technote](#), [tapemaster](#), [lite](#), [command line](#), [sync](#), [update doco](#)

From:
<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/technote/user_rights?rev=1651720388

Last update: **2025/01/21 22:07**

