
# TMSS10BACK

The Environmental Variable TMSS10BACK specifies the full path to a directory that can be used to backup the TapeTrack Database.

This location is set when the TapeTrack Framework Server is installed. If the database relocated this Environmental Variable value will need to be reset to the new location.



Executing the command **set** in a Windows Command Line will display, among other information, the Variable TMSS10DB and its full path.

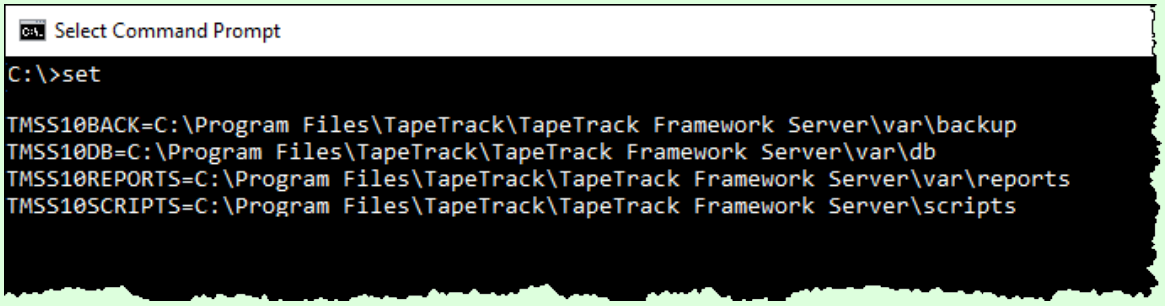


## Example

### Windows Command Line

<sxh> set TMSS10DB=C:\Program Files\TapeTrack\TapeTrack Framework Server\var\db </sxh>

### Windows PowerShell

<sxh> $env:TMSS10DB = “C:\Program Files\TapeTrack\TapeTrack Framework Server\var\db” </sxh>

## See Also

Setting environmental variables

environmental variables, paths

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
**https://docs.tapetrack.com/variable/tmss10back?rev=1579563085**

Last update: **2025/01/21 22:07**