

Managing Scratch Volumes With TMSS10LibraryManager

TMSS10LibraryManager is used to automatically manage Scratch Volume levels for your Backup Library.


Steps to manage:

- Set Library Repository Capacities.
- Set Scratch Repository preferences.
- Designate a Target Repository to eject Library Volumes to when space is required.
- Create a batch file
- Schedule batch file to run automatically


Set Library Capacities

Open TapeMaster, select the required Customer and Media Type from the Customer Tree.


For this example we will use Customer-ID US01 and Media-ID LTO along with the Repository-ID LIBR.

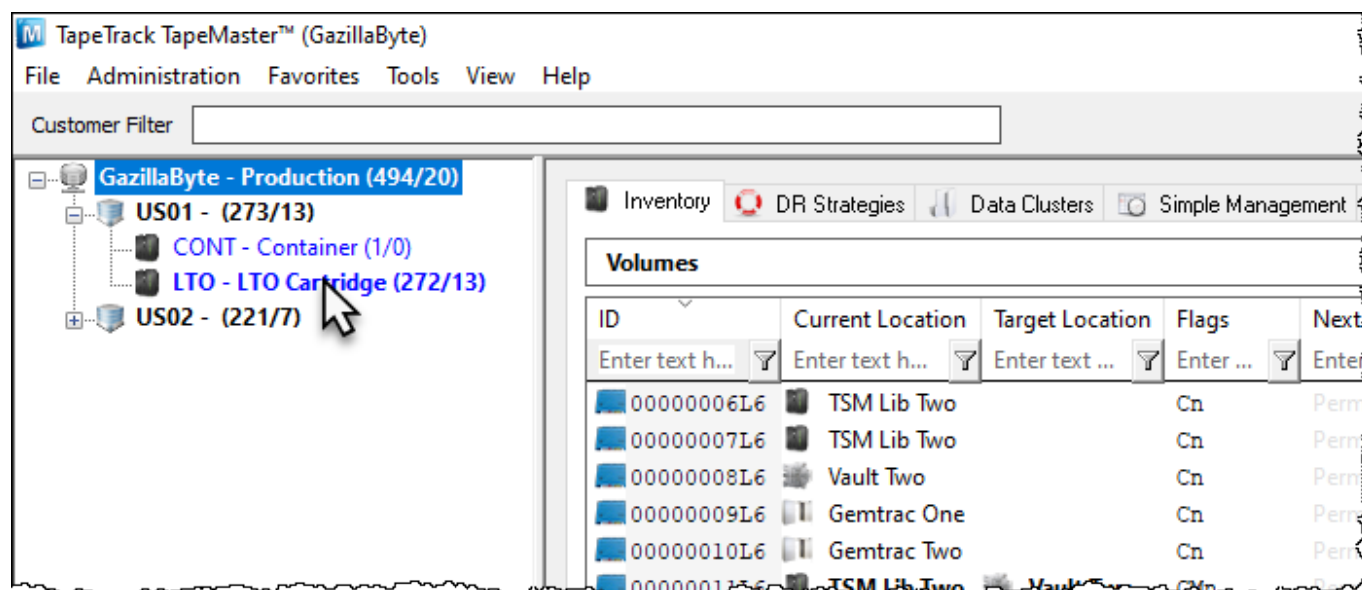

Right click on the Repository and select Properties to open the Properties window.

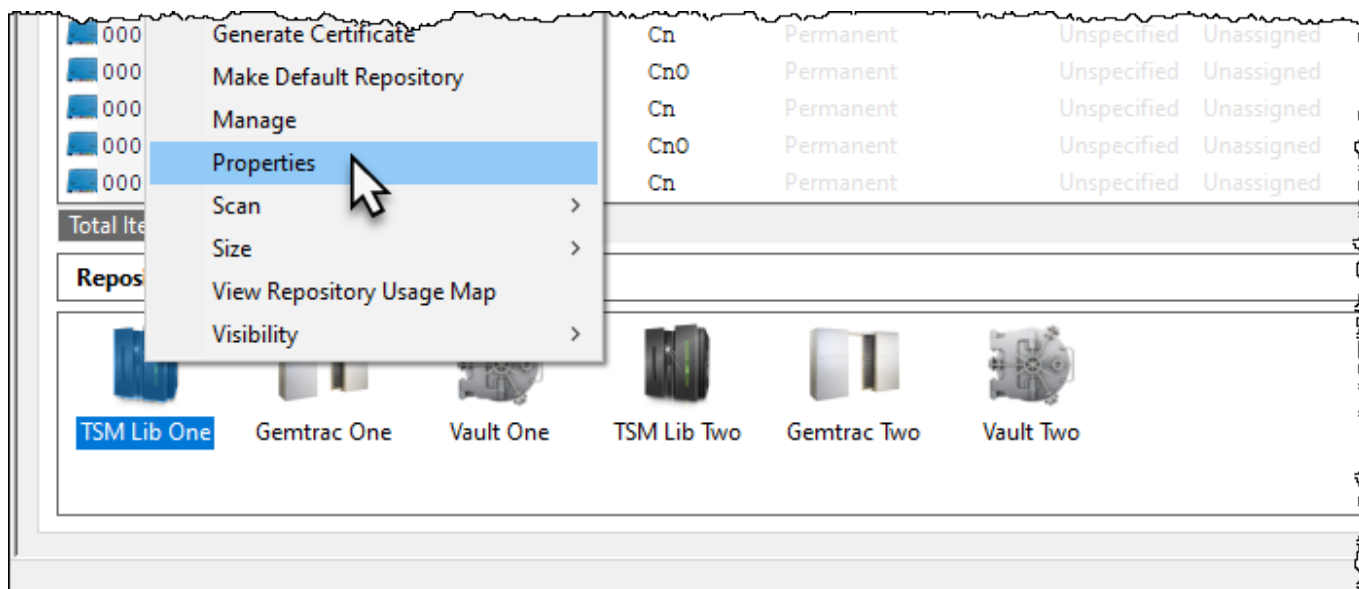

Select the Options tab.

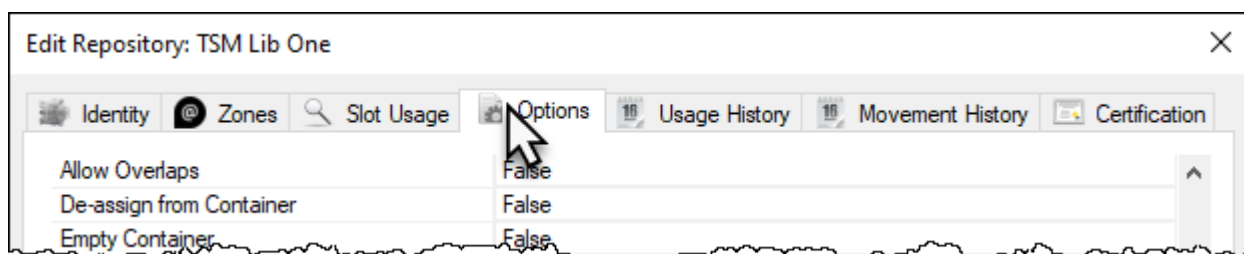

Towards the bottom, expand the Capacity section by clicking on the + sign.

In the field Capacity, enter the number of Volume Slots in your Library.

In the field Minimum Scratch enter the minimum number of Scratch Volumes required in the Library.

Edit Repository: TSM Lib One

Identity Zones Slot Usage Options Usage History Movement History Certification

Allow Overlaps	False
De-assign from Container	False
Empty Container	False
Do not slot if Container	False
Do not slot	False
Require Tag	False
Require Tag Reset	False
No re-move	False
Disallow backward next move date changes	False
Reset Data Cluster	False
Confirm Container Contents	False
Move Container Contents	False
Late Threshold	0
Highwater Offset	0
Movement Mode	None
Next Repository	Vault One
Enable Slotting	False
☒ Capacity	
Capacity	64
In Use	10
Incoming	0
Outgoing	2
Minimum Scratch	10
Scratch	0
☒ Coordinates	


Save Cancel Help

Click Save to update the Repository data.


Set Scratch Repository Preferences

From the other Repositories within the Customer's Media Type, decide the Repositories that Scratch Volumes should be harvested from and in what order. The higher the Scratch Priority the more preference it is given for Scratch selection. Any Repository with a Scratch Priority of 0 will not be selected for Scratch Volume selection.

To set the Scratch Priority of the Repository your Scratch Volumes will be selected from, right click on the required Repository and select Properties.

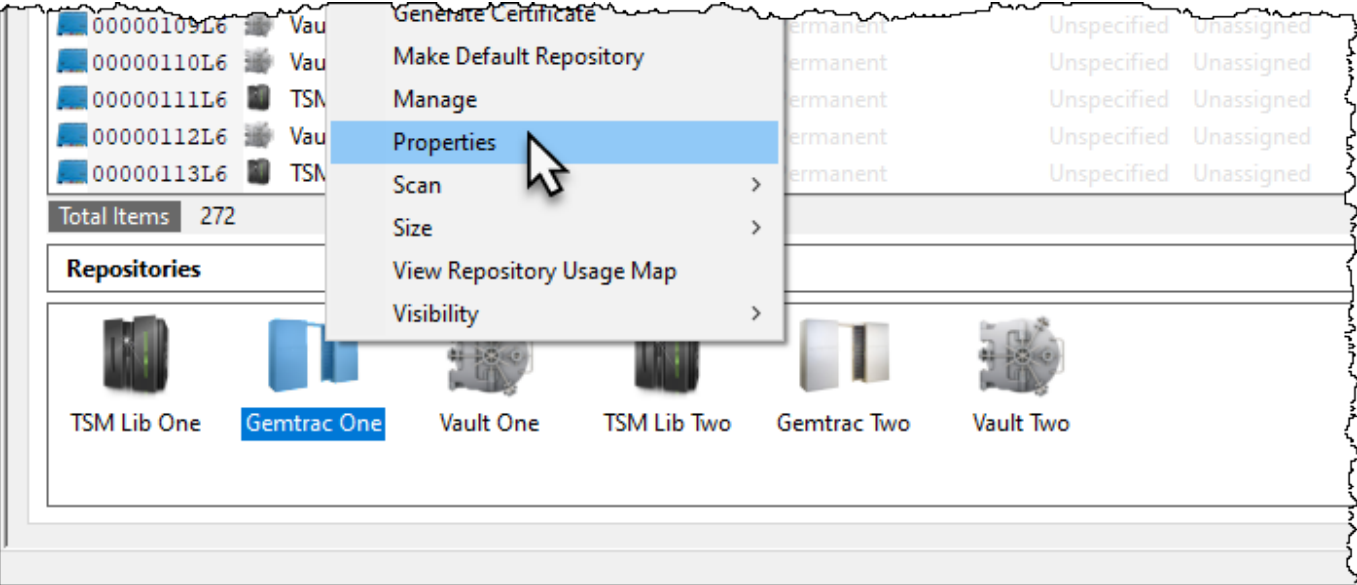

Select the Options tab.

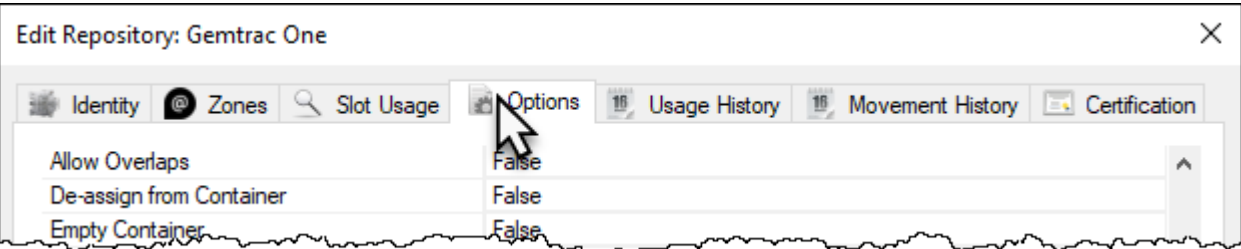

In the field Scratch Priority set the required number, remembering the higher the number the earlier it is used for Scratch Volume selection.

Edit Repository: Gemtrac One

Identity Zones Slot Usage Options Usage History Movement History Certification

GUIDs	
Local	55533031-0000-0000-4c54-4f0053435231
Remote	00000000-0000-0000-0000-000000000000
Allowable Volume-IDs	
Type	Racking
Scratch Mode	No Change
Scratch Priority	10
Offsite	False
Primary	False
No Distribution	False
Internal	False
Sort Sequence	2
Force Simple Management	False
No Next Repository	True
Allow Deletes	True
Allow Overlaps	False
De-assign from Container	False
Empty Container	False
Do not slot if Container	False
Do not slot	False
Require Tag	False
Require Tag Reset	False
No re-move	False
Disallow backward next move date changes	False
Reset Data Cluster	False
Confirm Container Contents	False
Move Container Contents	False
Late Threshold	0
Hinwater Offset	0

Save Cancel Help

Click Save to update the Repository data.

Create a Scheduled File

Windows Batch File

Open a new Notepad file and click File > Save As to open up the File Save dialog.

Save the file under an appropriate name, such as runTMSSLibraryManager.bat

Select All Types from the Save As Type drop box.

Click Save to create the batch file.

Add Command Line Code to Scheduled File

Minimum requirements for the Command Line code include:

- Program call TMSS10LibraryManager
- Logon string (-S user:-pass@server).
- Customer-ID (-C XXXX).
- Media-ID (-M XXXX).
- Repository-ID to manage (-R XXXX).

Using the minimum requirements TMSS10LibraryManager will attempt to load the required Scratch Volumes for the managed Repository, based off the Repository settings in TapeTrack. As no Target Repository is set, no Volumes will be ejected to make room for incoming Volumes.

If Notepad is still open, type the code below, replacing the login values, Customer-ID, Media-ID and Repository-ID to your own values. If the file is not open, right click on the file and select Edit to open.

Using the example Customer-ID US01 and Media-ID LTO along with the Repository-ID LIBR: <sxh>
TMSS10LibraryManager -S user:-pass@serveraddress -C "US01" -M "LTO" -R "LIBR" </sxh>

Additional options include

- Target Repository to eject Volumes to (-T XXXX). Setting this value will allow TMSS10LibraryManager to eject qualifying Volumes to make room for incoming Scratch Volumes if required.
- Volume Selection Filter to include only Volumes that match (-V). A filter of *L6 will prune the list of all available Volumes to only those that end in L6, eg. 100100L6.
- Configuration file (-c).
- Volume ejection exclusion filter (-e). A filter value of *L5 will exclude all Volumes that end in L5 from being ejected from the Library, eg 100100L5.
- Minimum free slots required in Repository (-f). This value is used to calculate how many Volumes will need to be ejected to make room for the required Scratch Volumes and still maintain the set number of empty slots in the Library.
- Repository Scratch order override (-r). Allows you to override the Scratch Priority set through TapeMaster. This can be useful when running TMSS10LibraryManager for multiple Libraries, allowing the selection of Scratch Volumes to be directed to different Repositories for each Library if required.
- Minimum Scratch Volumes required in Repository (-s). Allows you to override the minimum Scratch Volume number set in TapeMaster

Using the example Customer-ID US01, Media-ID LTO, Repository-ID LIBR, along with specifying the Repository OFFS to eject any Volumes to. Allow 5 free slots in the Library with a minimum 8 Scratch Volumes, ensuring no L5 Volumes are ejected. Overriding the Scratch Priority to stop selecting Scratch Volumes from RAC1 to selecting them from RAC2

<sxh> TMSS10LibraryManager -S user:-pass@serveraddress -C "US01" -M "LTO" -R "LIBR" -T "OFFS"
-f 5 -s 8 -r "RAC1=0;RAC2=10" </sxh>

Redirecting output to file

TMSS10LibraryManager outputs, by default, reports to standard out and diagnostic information to standard error. This information can be captured and redirected to file using the redirection pipes `>` and `2>`.

To redirect the reports to `LibraryManager_Reports_stdout.txt` and diagnostic information to `LibraryManager_Diagnostic_stderr.txt`.

```
<sxh> TMSS10LibraryManager -S user:-pass@serveraddress -C "US01" -M "LTO" -R "LIBR" >
LibraryManager_Reports_stdout.txt 2> LibraryManager_Diagnostic_stderr.txt </sxh>
```

From:

<https://docs.tapetrack.com/> - **TapeTrack Documentation**

Permanent link:

https://docs.tapetrack.com/cookbook/library_manager?rev=1586396120

Last update: **2025/01/21 22:07**

