Connecting to a TapeTrack Framework Server

Each TapeTrack Framework Server accepts incoming communications on a single TCP/IP port (by default this port is 5000).

These incoming communications are firstly compressed with gzip level 9 compression, and then encrypted with AES 256 bit encryption.

To allow these connections the TapeTrack Framework Server must have firewall access to accept incoming connections, and the connecting clients must have outbound firewall access to establish a single TCP/IP stateful connection.

In the event the connection is terminated, either by a connection fault or the server timing out the connection, a new connection must be established.

In addition to direct TCP/IP connections, the TapeTrack communications API also supports connections via a HTTP Proxy.

Names and IP addresess

As with all TCP/IP connections, the end point address can be represented by either a name or dotted IP address.

It is recommended that you always use a name, rather than dotted IP address to connect to your TapeTrack server as this contemplates a future change in IP address.



If you are using a name to connect to your TapeTrack Server and can not connect, you should check to ensure that your name is resolving to an IP address.

<sxh plain;> jsmith> nslookup tapetrack.gazillabyte.com Server: dc1.gazillabyte.local Address: 192.168.1.2

Non-authoritative answer: Name: tapetrack.gazillabyte.com Address: 192.241.211.124 </sxh>

Testing your TCP/IP connection

The simplest way to test if you are able to establish a connection to a TapeTrack Framework Server is to use the TMSS10Ping command line utility.



The TMSS10Ping utility simply sends an empty TapeTrack packet and receives a response. It is available for all supported platforms, requires no login credentials, and has no other dependencies.

TMSS10Ping installs with TapeTrack software and is stored under (depending on what products are installed):

TapeMaster
Program Files\TapeTrack\TapeTrack TapeMaster
Lite
Program Files\TapeTrack\TapeTrack Lite
Server Utilities
Program Files\TapeTrack\TapeTrack Server Utilities\bin\tapetrack

Presuming your TapeTrack Framework Server at address **tapetrack.gazillabyte.com**, on port **5000** a successful test would look like this:

<sxh plain;> [root@documentation-us conf]# TMSS10Ping -P 5000 tapetrack.gazillabyte.com 44 bytes from 192.241.211.124: seq=1 time=0.00 ms 44 bytes from 192.241.211.124: seq=2 time=0.00 ms 44 bytes from 192.241.211.124: seq=3 time=0.00 ms 44 bytes from 192.241.211.124: seq=4 time=0.00 ms

— 192.241.211.124 TMSS10Ping statistics — 4 packets transmitted round-trip min/avg/max = 0.00/0.00/0.00 ms </sxh>

If TMSS10Ping fails to make a valid connection, try to connect via port 443.

<sxh plain;> [root@documentation-us conf]# TMSS10Ping -P 443 tapetrack.gazillabyte.com 44 bytes from 192.241.211.124: seq=1 time=0.00 ms 44 bytes from 192.241.211.124: seq=2 time=0.00 ms 44 bytes from 192.241.211.124: seq=3 time=0.00 ms 44 bytes from 192.241.211.124: seq=4 time=0.00 ms

— 192.241.211.124 TMSS10Ping statistics — 4 packets transmitted round-trip min/avg/max = 0.00/0.00/0.00 ms </sxh>

If a successful connection cannot be through either port contact your network administrator to ensure ports are open.

Connecting via TapeTrack Software

Command Line Programs

All TapeTrack Command Line programs that communicate with the TapeTrack Framework Server will have a `-S argument`.


An example for connecting as user **jsmith**, with password **mypassword** is:

<sxh plain;> -S jsmith:-mypassword@tapetrack.gazillabyte.com </sxh>

For detailed instructions on how to use the -S argument please see the Command Line Server Argument page.

TapeTrack Desktop Programs

Most users will connect to the TapeTrack Framework Server via one of the Desktop Applications.

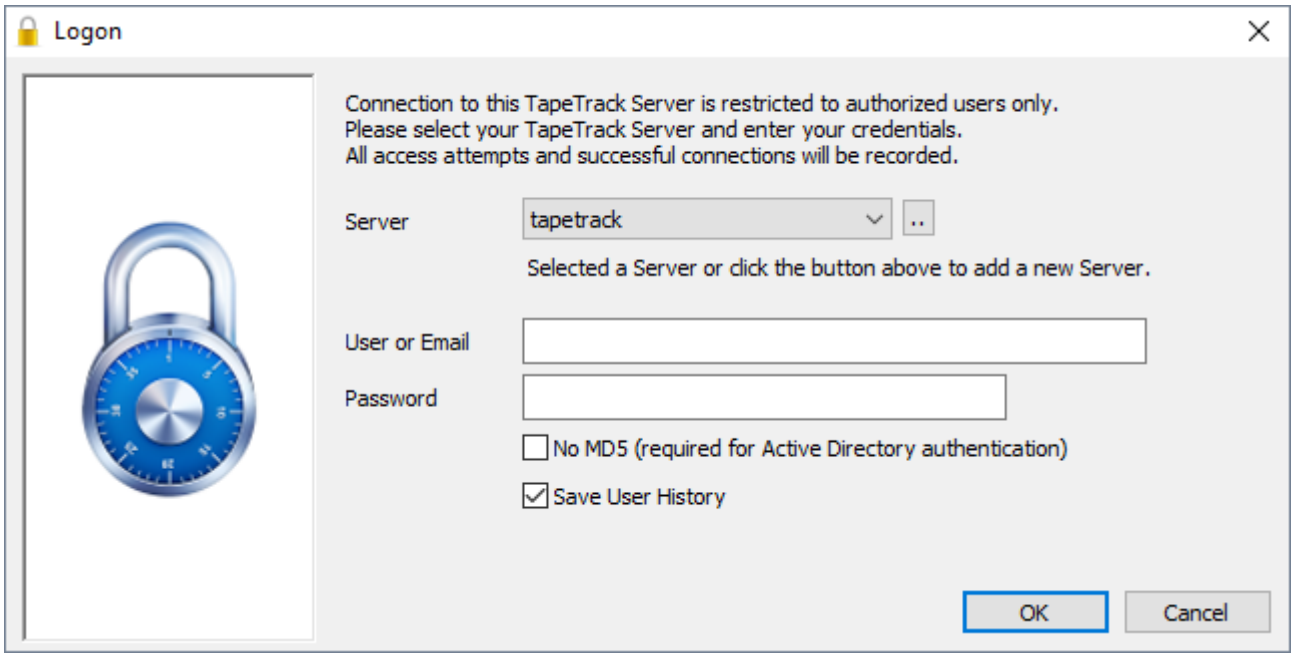

Each of these applications will automatically launch the Desktop Login Window which allows the user to setup a server connection.

Server connections added using this Window will be stored in the user's Windows registry under the **HKEY_CURRENT_USER** section. In addition, connections can also be defined in the program's configuration file.

For detailed instructions on how to setup a connection please see:

- Adding a Desktop Server Connection.
- Adding a Desktop Server Connection via the Configuration File.
- TapeTrack Server Connection via URL Protocol Handler.

Connecting via a HTTP Proxy

TapeTrack Desktop and Command Line programs allow TapeTrack Framework Server communications to be tunneled via HTTP proxy server.

Although the communications sent via the proxy are not HTTP/HTTPS requests, they are presented to the proxy as HTTPS (Encrypted HTTP) communications.

For details on how to tunnel TapeTrack communications via a HTTP Proxy please see:

- Desktop HTTP Proxy setup

- Command Line HTTP Proxy setup.

Connection Troubleshooting

All TapeTrack programs use an underlying low level communications API which allows users to trace connection and communications requests.

To enable logging, set the environmental variable TMSSAPILOGDIR to the path of an existing directory.



Care should be taken to not leave the TMSSAPILOGDIR set as it will slow all TapeTrack Software due to the overhead of logging.

<sxh plain;> set TMSSAPILOGDIR=c:\Users\jsmith\Desktop\logs TMSS10Ping localhost </sxh>

Creates the file **TMSSAPILOG-005336.txt** with the contents:

<sxh plain;> 17:39:25: TMSS10API_Init (API Version=Feb 2 2017 10:18:50) 17:39:25: TMSS10API_Connect: Server(localhost) Port(5000) 17:39:25: TMSS10API_Connect: Connection OK IP(127.0.0.1) 17:39:25: TMSS10API_Send: Function(Ping) Length(0) Flags(0) OptArgs(0) 17:39:25: TMSS10API_Send: RC(Request OK) Feedback(0) MilliSecs(0) Avail(0) Count(0) Length(0) 17:39:25: TMSS10API_Send: Function(Ping) Length(0) Flags(0) OptArgs(0) 17:39:25: TMSS10API_Send: RC(Request OK) Feedback(0) MilliSecs(0) Avail(0) Count(0) Length(0) 17:39:25: TMSS10API_Send: Function(Ping) Length(0) Flags(0) OptArgs(0) 17:39:25: TMSS10API_Send: RC(Request OK) Feedback(0) MilliSecs(0) Avail(0) Count(0) Length(0) 17:39:25: TMSS10API_Send: Function(Ping) Length(0) Flags(0) OptArgs(0) 17:39:25: TMSS10API_Send: RC(Request OK) Feedback(0) MilliSecs(0) Avail(0) Count(0) Length(0) 17:39:25: TMSS10API_Term </sxh>

communication, environmental variables, logging

From:
https://docs.tapetrack.com/ - **TapeTrack Documentation**

Permanent link:
https://docs.tapetrack.com/general/framework_connection?rev=1553733217

Last update: **2025/01/21 22:07**